




DOWN LEAD
BRACKETS

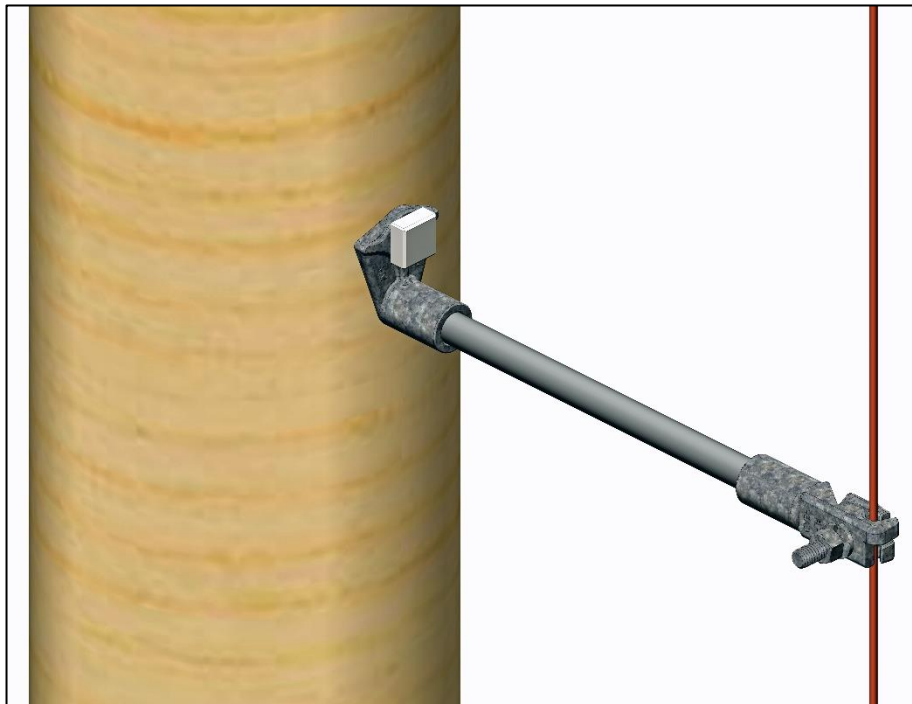


DOWN LEAD BRACKETS

SPECIFICATIONS

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

CATALOG NUMBER	ROD DIAMETER	LENGTH "A" INCHES	LENGTH "B" INCHES	WIRE MAX DIA
STANDARD COATING				
FL18	13/16	18	22	1/4
FL24	13/16	24	28	1/4

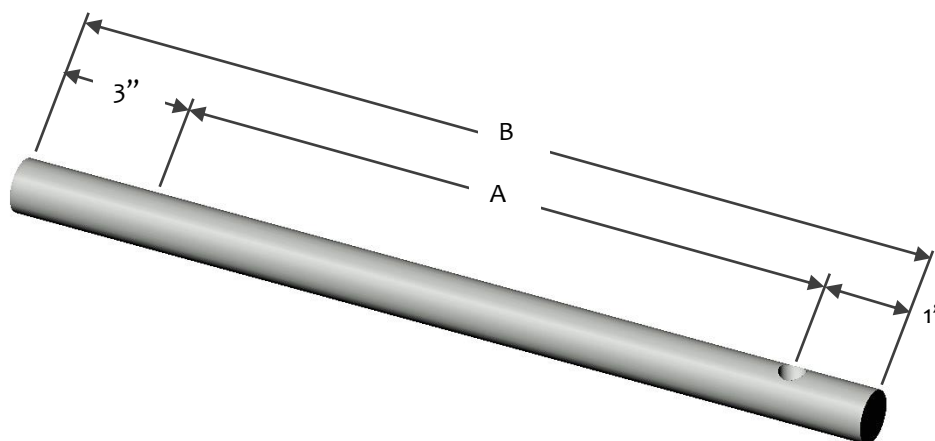

NOTE:
FOR OTHER LENGTHS PLEASE CONTACT US.

DOWN LEAD BRACKETS


SPECIFICATIONS

FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	ROD DIAMETER	LENGTH "A" INCHES	LENGTH "B" INCHES	WIRE MAX DIA
STANDARD COATING				
FLH125	13/16	12	21-3/4	1/4
FLH185	13/16	18	27-3/4	1/4
FLH245	13/16	24	33-3/4	1/4

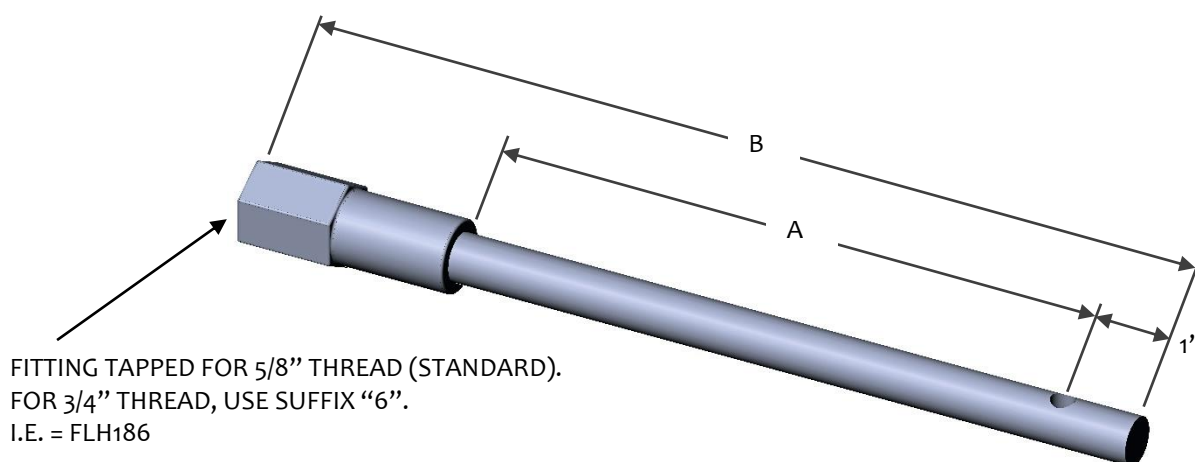

FITTING TAPPED FOR 5/8" THREAD (STANDARD).
FOR 3/4" THREAD, USE SUFFIX "6".
I.E. = FLH186

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

DOWN LEAD BRACKETS


SPECIFICATIONS

FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	ROD DIAMETER	LENGTH "A" INCHES	LENGTH "B" INCHES	WIRE RANGE
STANDARD COATING				
FLC12	13/16	12	18-1/2	.125 - .398
FLC18	13/16	18	24-1/2	.125 - .398
FLC24	13/16	24	30-1/2	.125 - .398

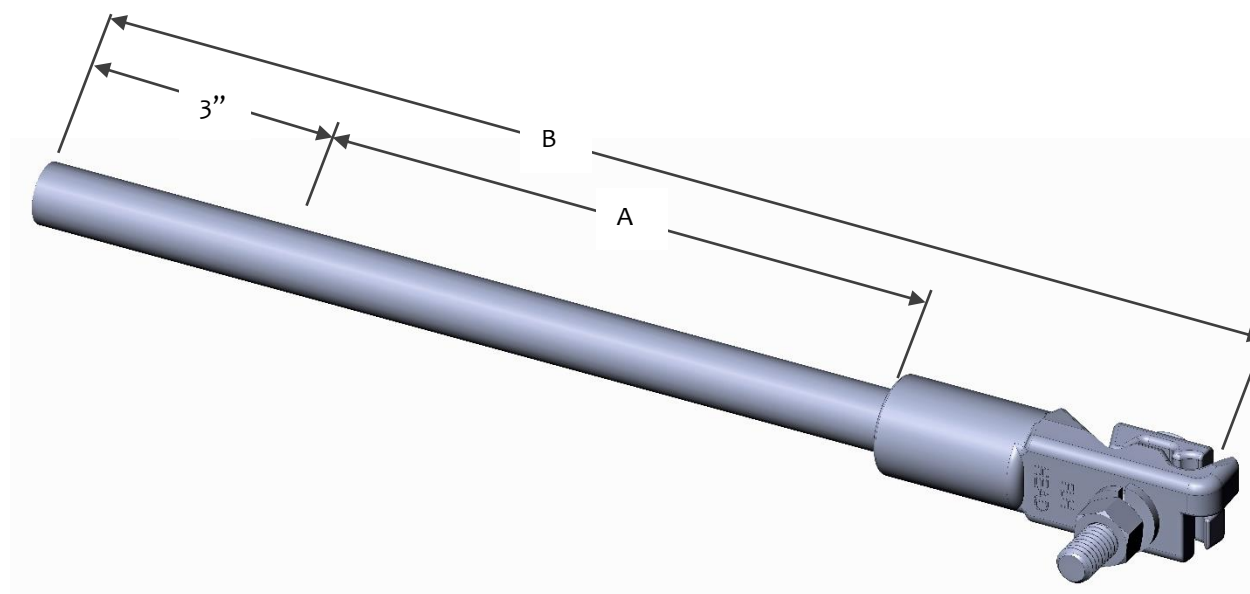

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

DOWN LEAD BRACKETS


SPECIFICATIONS

FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	ROD DIAMETER	LENGTH "A" INCHES	LENGTH "B" INCHES	WIRE RANGE
STANDARD COATING				
FLB125	5/8	12	18-1/4	.125 - .398
FLB185	5/8	18	24-1/4	.125 - .398
FLB245	13/16	24	30-1/4	.125 - .398
FLB365	13/16	36	42-1/4	.125 - .398

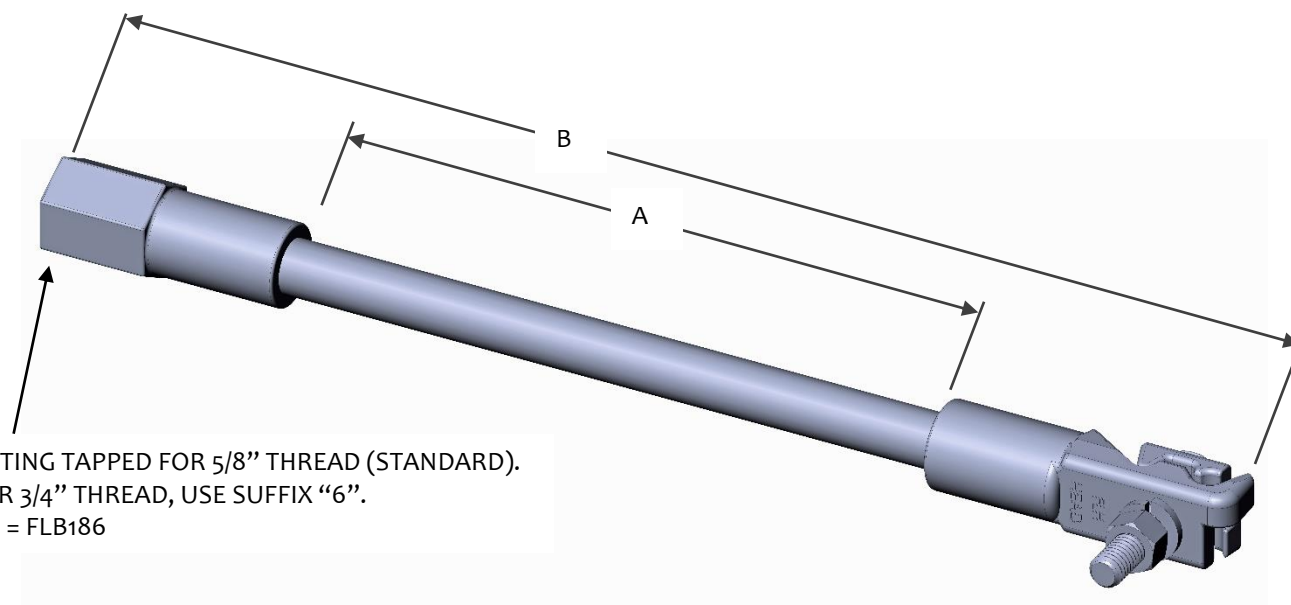

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

DOWN LEAD BRACKETS


SPECIFICATIONS

FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	ROD DIAMETER	LENGTH "A" INCHES	LENGTH "B" INCHES	WIRE RANGE
FLBA12	13/16	12	19-1/4	.125 - .398
FLBA18	13/16	18	25-1/4	.125 - .398
FLBA24	13/16	24	31-1/4	.125 - .398

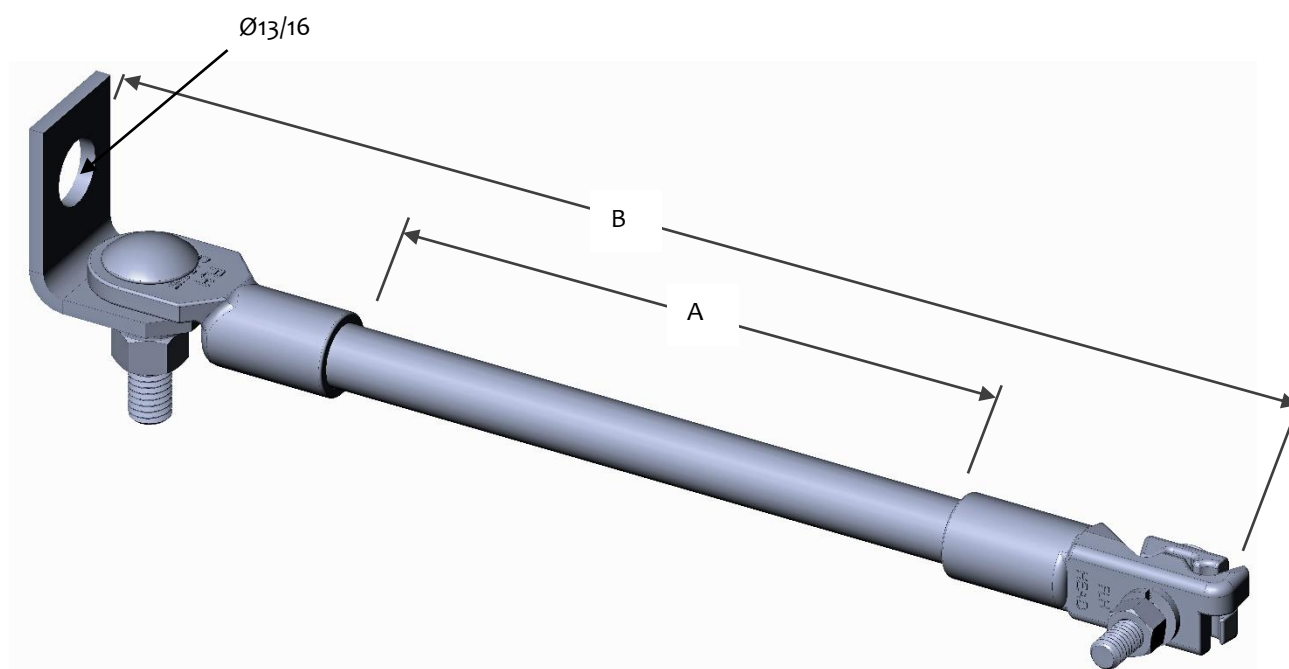

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

DOWN LEAD BRACKETS


SPECIFICATIONS

FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	ROD DIAMETER	LENGTH "A" INCHES	LENGTH "B" INCHES	WIRE RANGE
FLBB12	5/8	12	17	.125 - .398
FLBB18	5/8	18	23	.125 - .398
FLBB24	5/8	24	29	.125 - .398

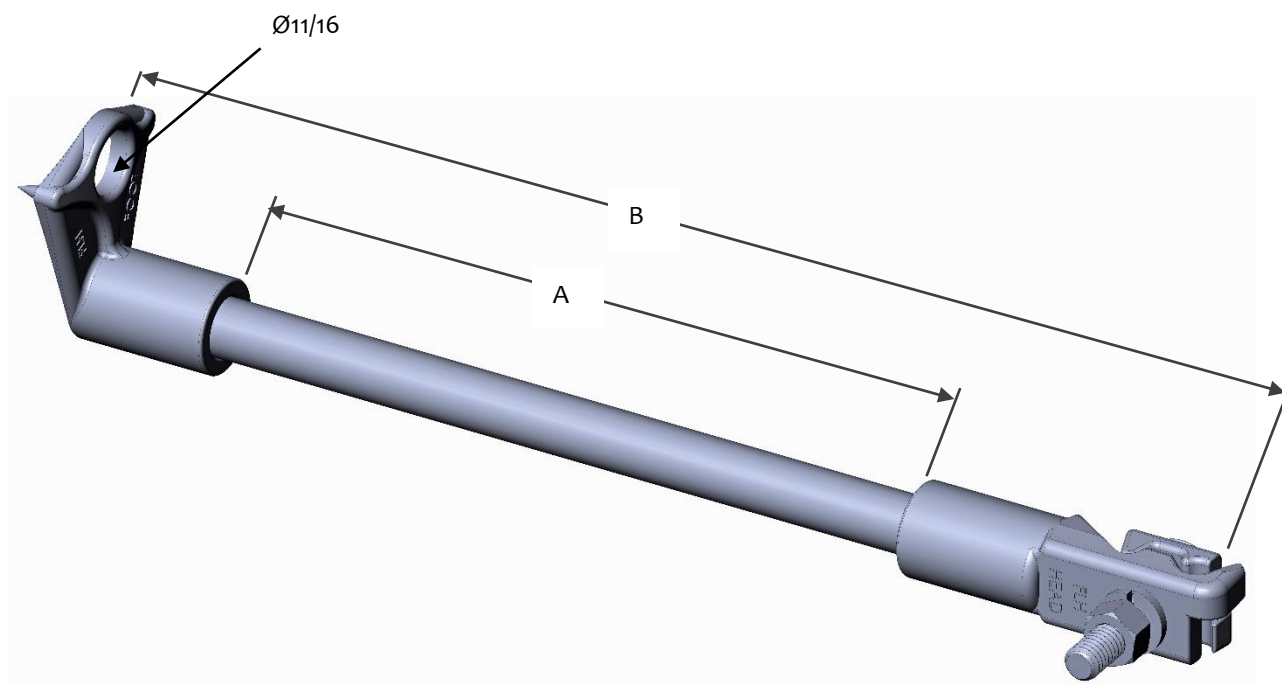

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.


DOWN LEAD BRACKETS

SPECIFICATIONS

FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

CATALOG NUMBER	ROD DIAMETER	LENGTH "A" INCHES	LENGTH "B" INCHES
STANDARD COATING			
FLH125-1T	5/8	12	14-3/4
FLH155-1T	5/8	15	17-3/4
FLH185-1T	5/8	18	20-3/4

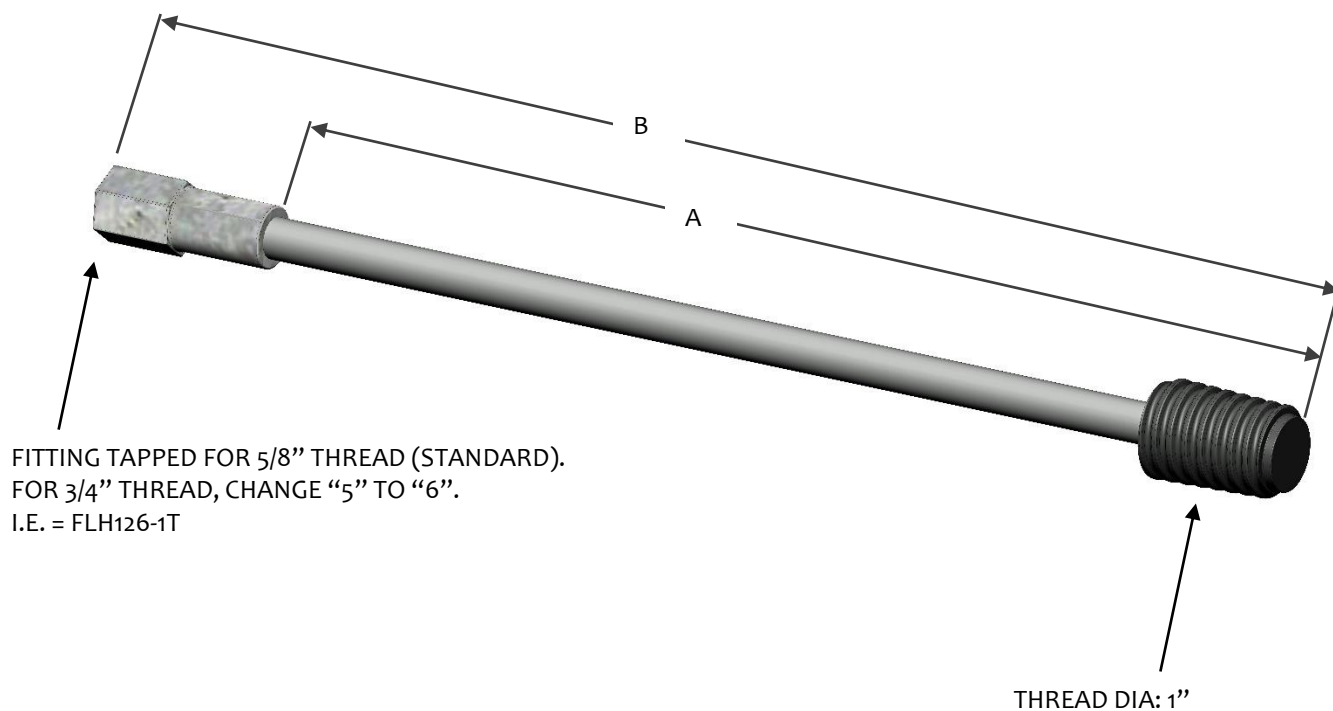

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.


DOWN LEAD BRACKETS

SPECIFICATIONS

FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

CATALOG NUMBER	ROD DIAMETER	LENGTH "A" INCHES	LENGTH "B" INCHES
STANDARD COATING			
FLH125-1.38T	5/8	12	14-3/4
FLH155-1.38T	5/8	15	17-3/4
FLH185-1.38T	5/8	18	20-3/4

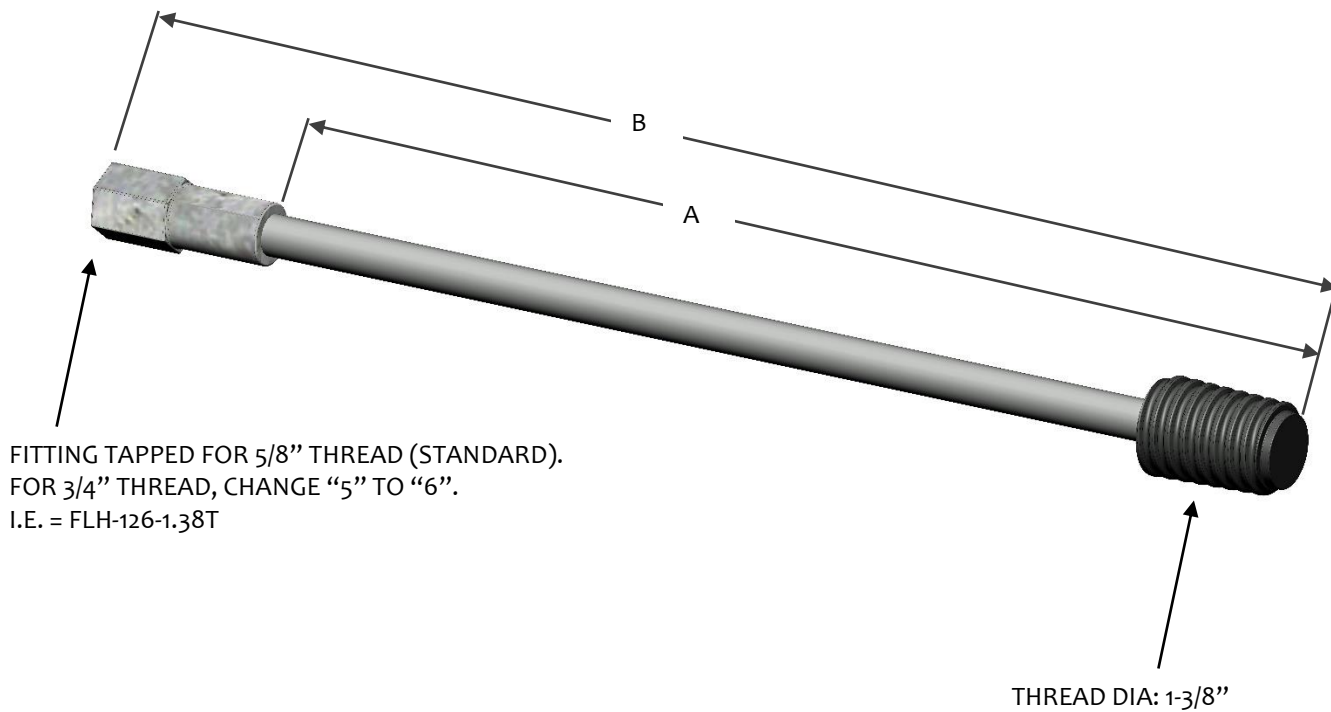

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.


DOWN LEAD BRACKETS

SPECIFICATIONS

FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

CATALOG NUMBER	ROD DIAMETER	LENGTH "A" INCHES	LENGTH "B" INCHES
STANDARD COATING			
FLBB12-1T	5/8	12	13-1/2
FLBB15-1T	5/8	15	16-1/2
FLBB18-1T	5/8	18	19-1/2

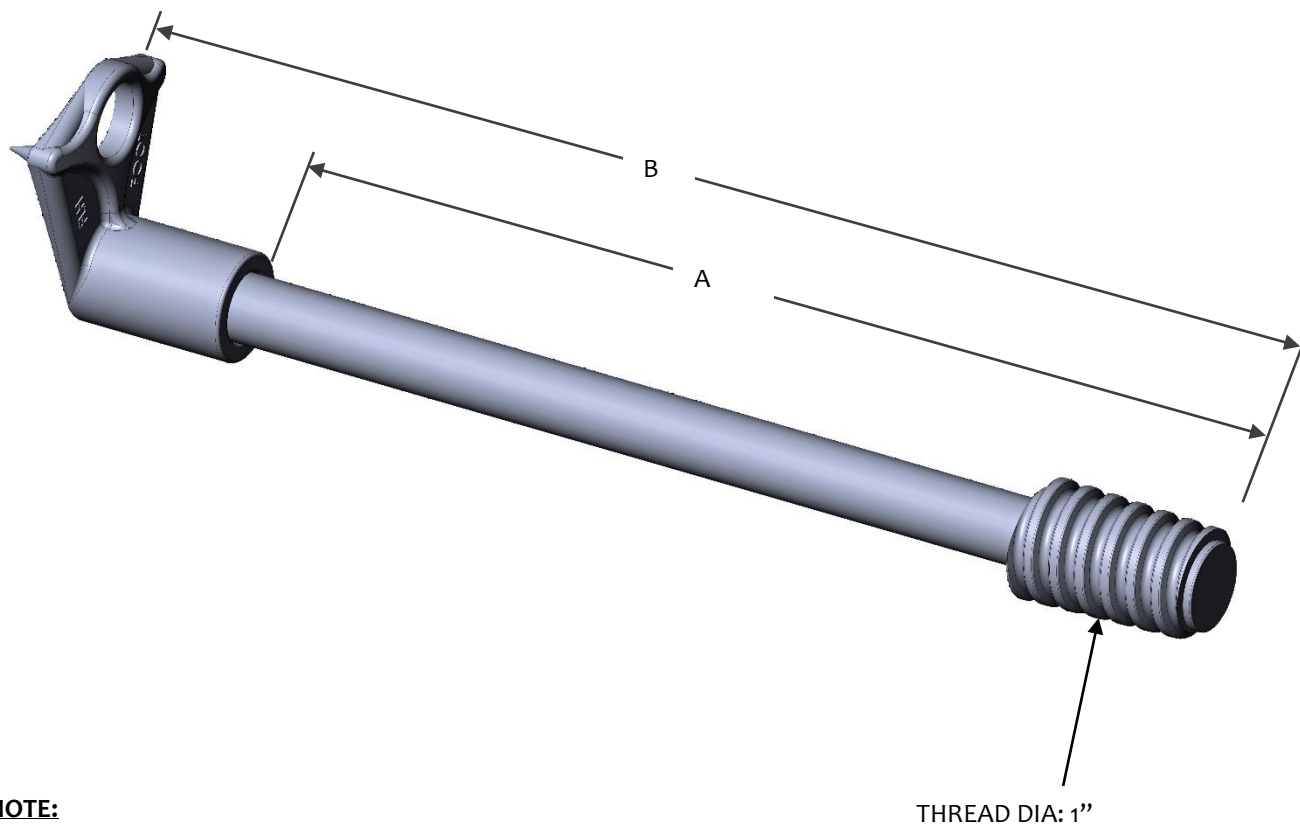

NOTE:
FOR OTHER LENGTHS PLEASE CONTACT US.


DOWN LEAD BRACKETS

SPECIFICATIONS

FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

CATALOG NUMBER	ROD DIAMETER	LENGTH "A" INCHES	LENGTH "B" INCHES
STANDARD COATING			
FLBB12-1.38T	5/8	12	13-1/2
FLBB15-1.38T	5/8	15	16-1/2
FLBB18-1.38T	5/8	18	19-1/2

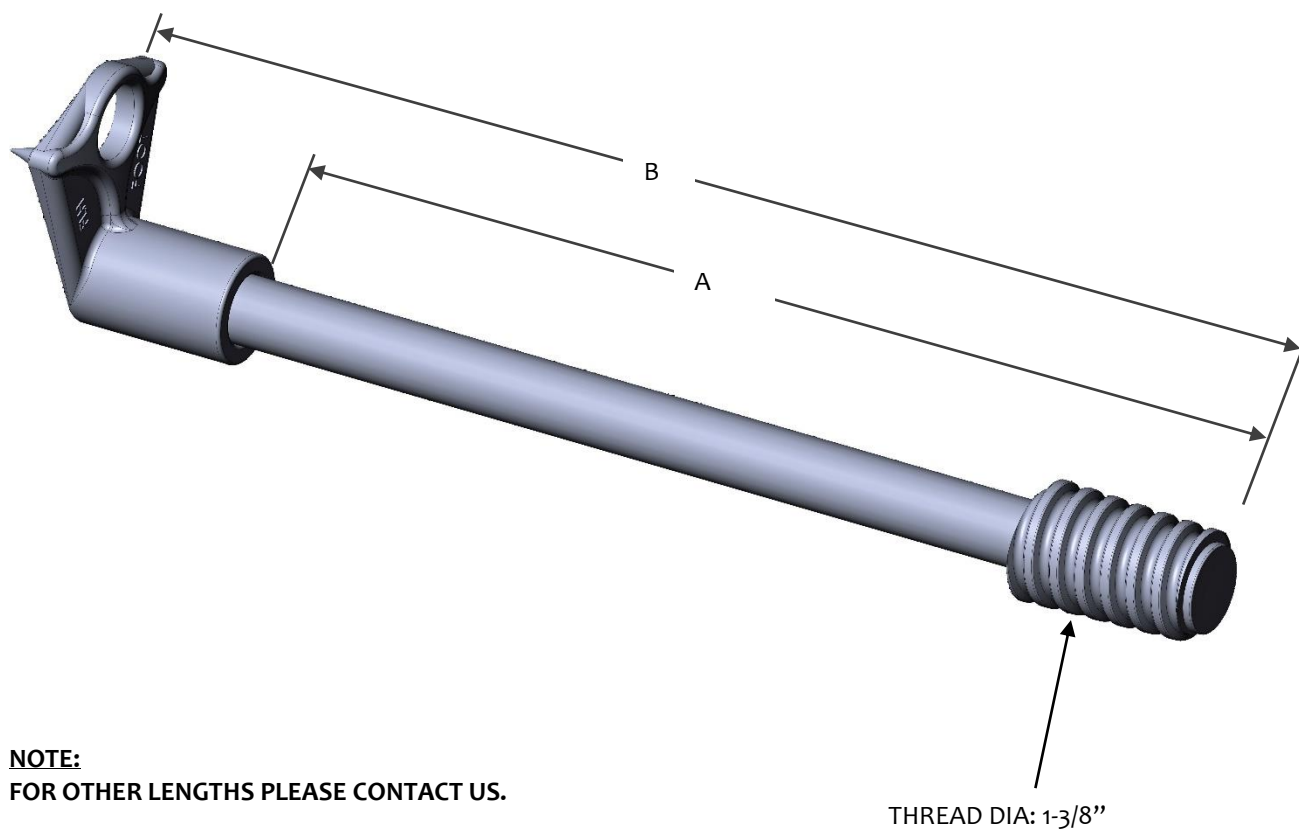

NOTE:
FOR OTHER LENGTHS PLEASE CONTACT US.