




CONDUCTOR SPACERS

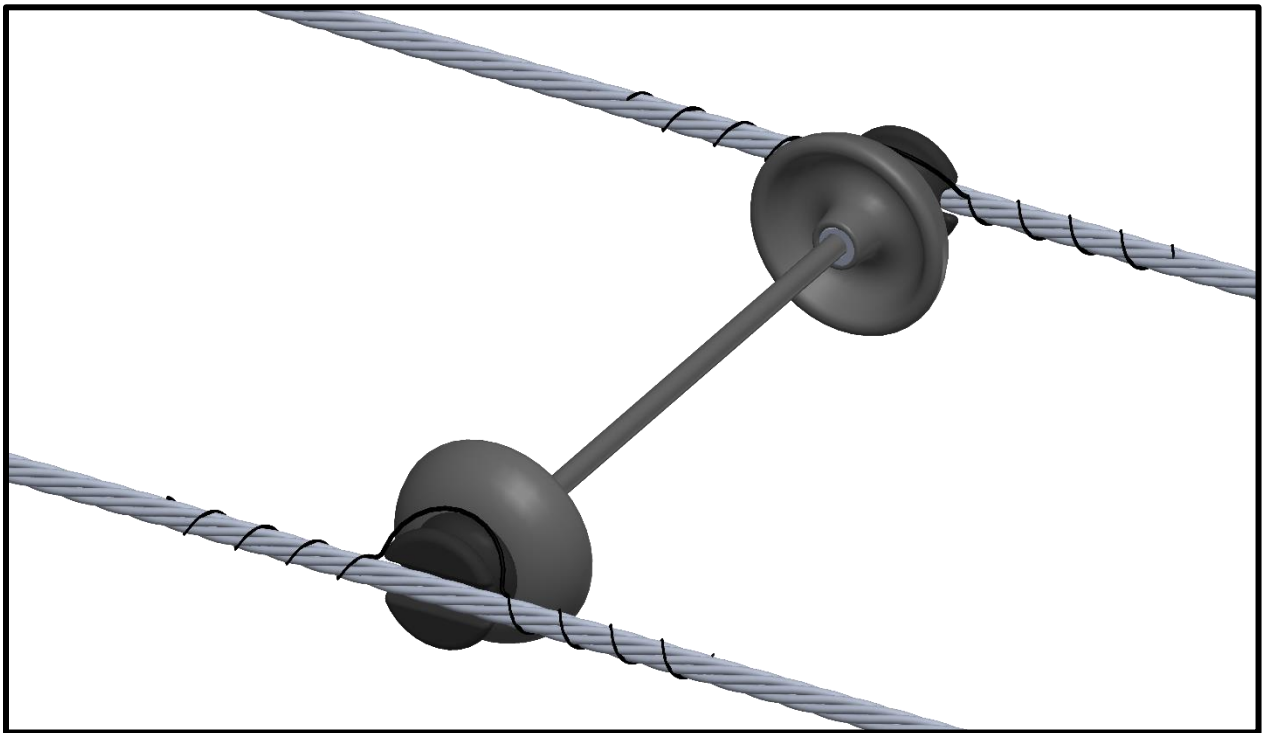

CONDUCTOR SPACER

NUMBERING KEY

GCSB - "L" - 1

GCSB PREFIX

FIBERGLASS CONDUCTOR
SPACER BRACE


OPTIONAL THREAD

1 = Ø 1" PER ANSI C135.22
1.375 = Ø 1-3/8" PER ANSI C135.22

LENGTH

OFFERINGS

24 = 24"
36 = 36"
48 = 48"

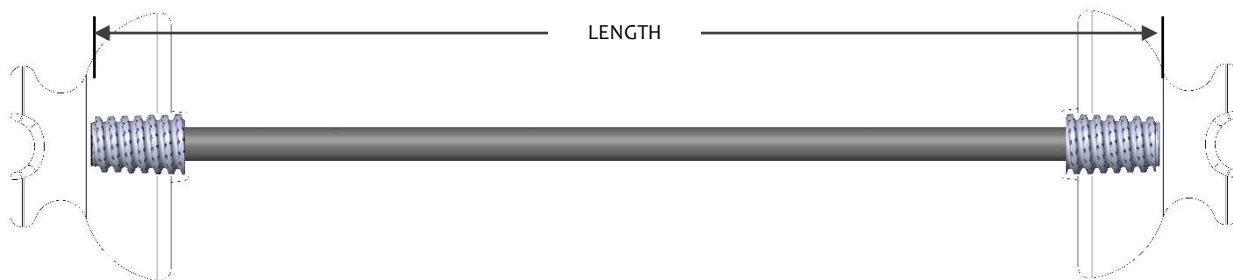


CONDUCTOR SPACER

SPECIFICATIONS

FITTINGS: NYLON 6/6

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

CATALOG NUMBER	ROD DIA INCHES	LENGTH INCHES
STANDARD COATING		
GCSB-24-1	.625	24
GCSB-36-1	.625	36
GCSB-48-1	.625	48

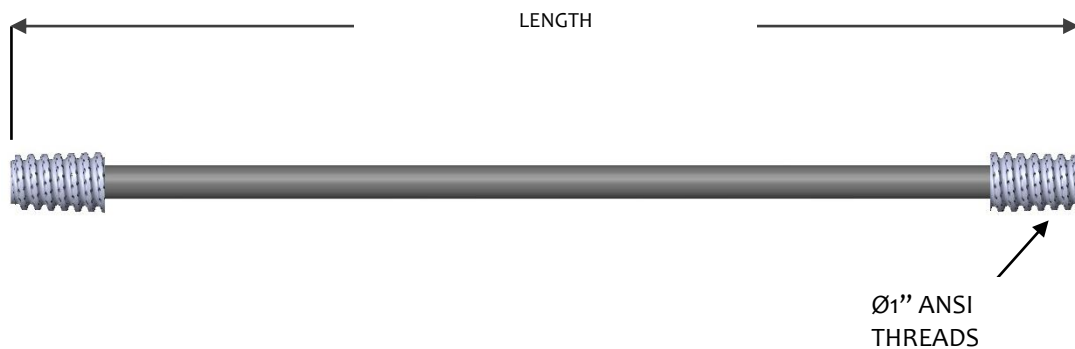

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.


CONDUCTOR SPACER

SPECIFICATIONS

FITTINGS: NYLON 6/6

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

CATALOG NUMBER	ROD DIA INCHES	LENGTH INCHES
STANDARD COATING		
GCSB-36-1.375	.812	36
GCSB-48-1.375	.812	48
GCSB-54-1.375	.812	54

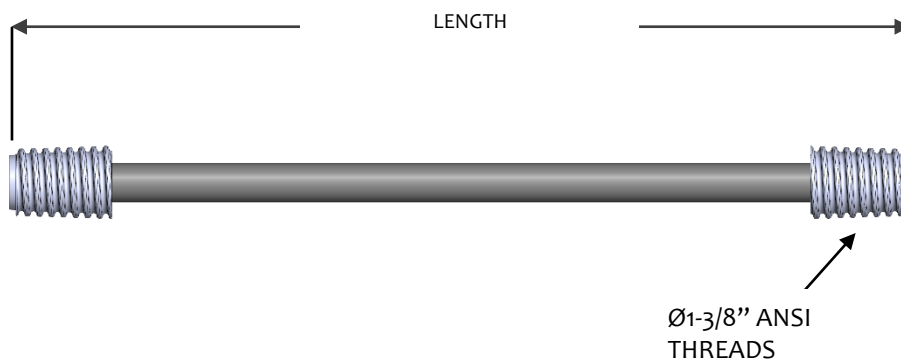

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.