




SECTIONALIZERS

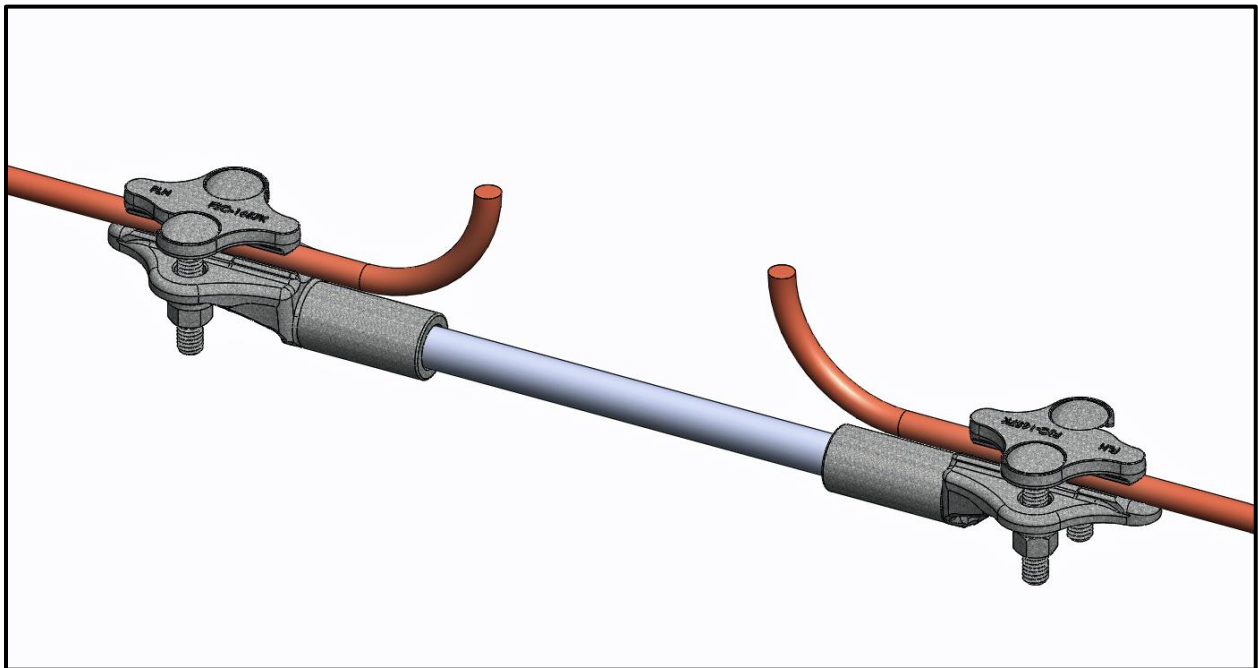

SECTIONALIZER

GUYSTRAIN SYSTEM
NUMBERING KEY

FSC 1657 – 6 – C

FSC PREFIX

FIBERGLASS SECTIONALIZER

CONDUCTOR RANGE

.16 MIN - .57 MAX

OPTIONAL FITTING

OFFERINGS


C = CLEVIS FITTING

LENGTH

OFFERINGS


6 = 6"

12 = 12"

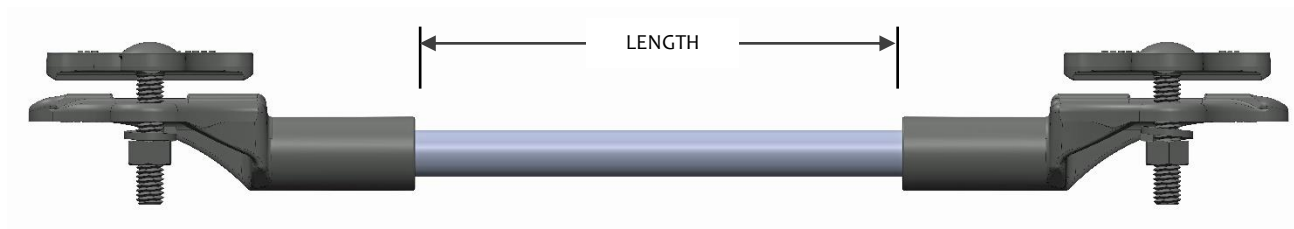

SECTIONALIZER

OPTIONS

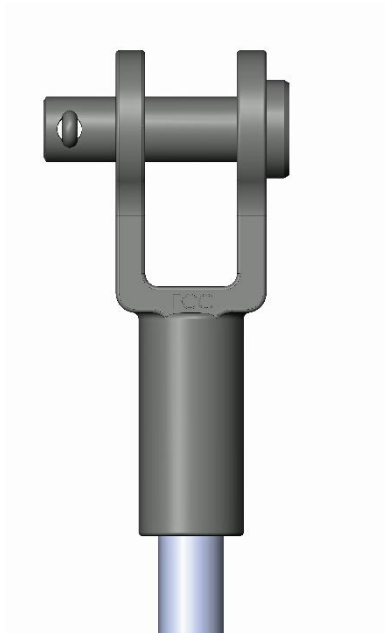

FCC
CLEVIS
FITTING



FSC
SECTIONALIZER
FITTING

SECTIONALIZER

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	CABLE RANGE	LENGTH "A" INCHES	LENGTH "B" INCHES	RATING (LBS)
STANDARD COATING	DECIMAL (INCHES)			
FSC1657-6	.16 - .57	6	16.5	6,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

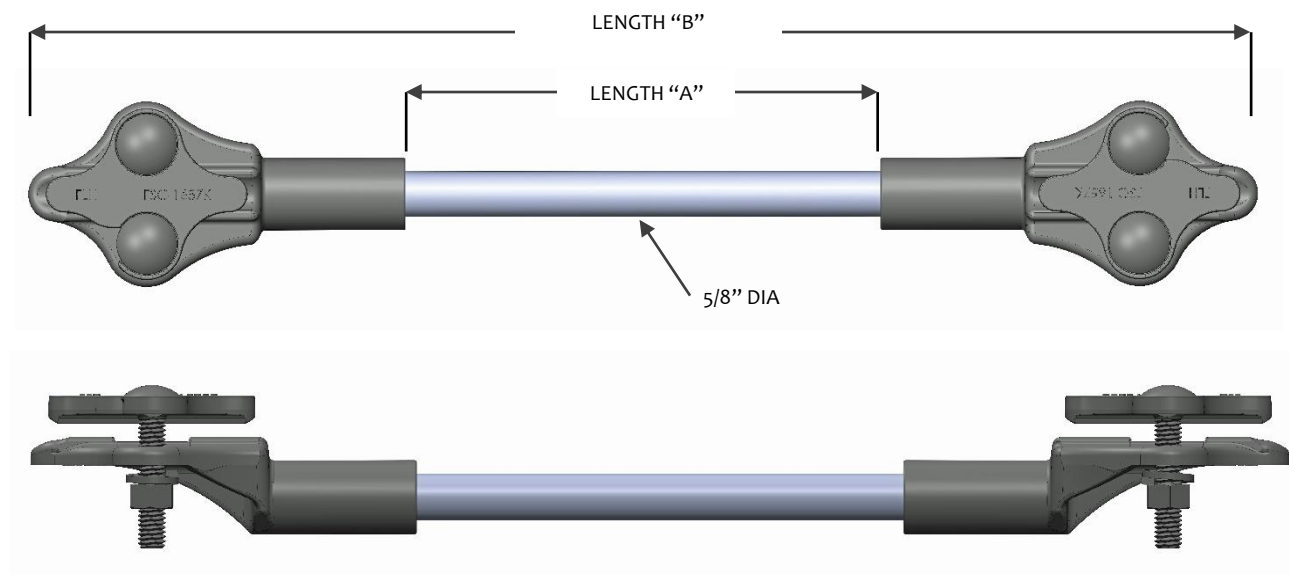

NOTE:
FOR OTHER LENGTHS PLEASE CONTACT US.

SECTIONALIZER / CLEVIS

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	CABLE RANGE	LENGTH "A" INCHES	LENGTH "B" INCHES	RATING (LBS)
STANDARD COATING	DECIMAL (INCHES)			
FSC1657-6C	.16 - .57	6	15-13	6,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

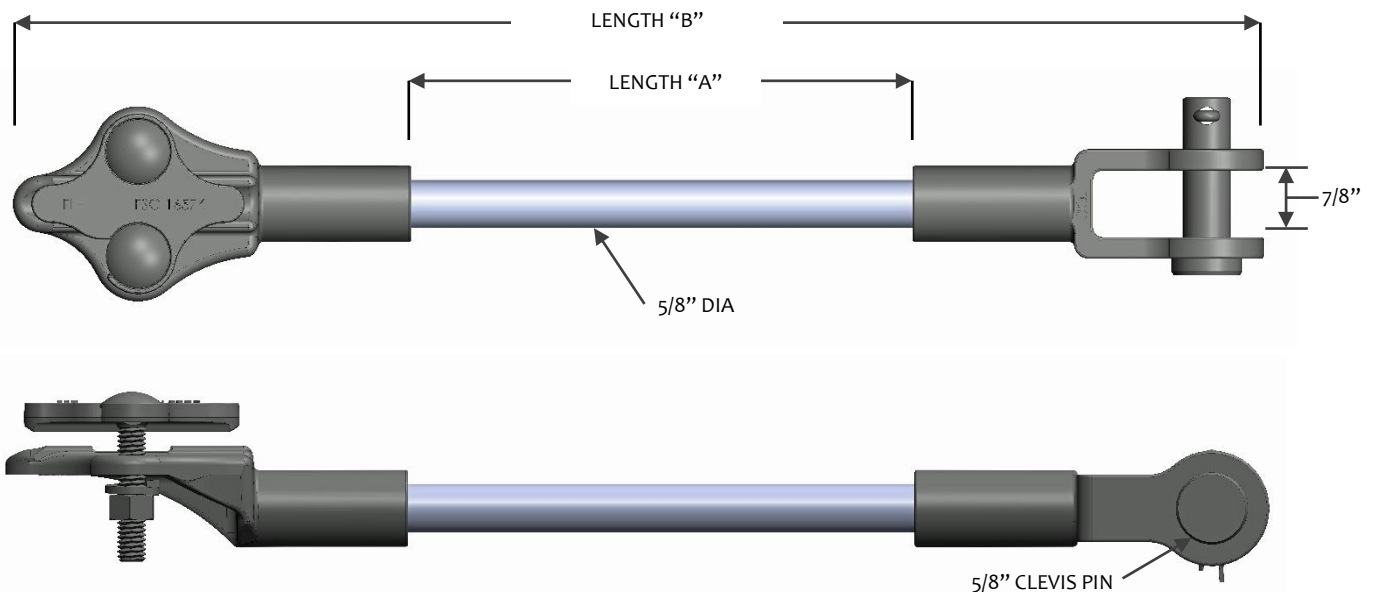

NOTE:
FOR OTHER LENGTHS PLEASE CONTACT US.

SECTIONALIZER / CLEVIS

SPECIFICATIONS

FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	CABLE RANGE	LENGTH "A" INCHES	LENGTH "B" INCHES	RATING (LBS)	
STANDARD COATING	DECIMAL (INCHES)				
FSCE-51-6F	.16 - .51	6	20.5	6,000 CLAMP	4,000 EYE

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

