




CONDUCTOR
SUPPORT
BRACKETS

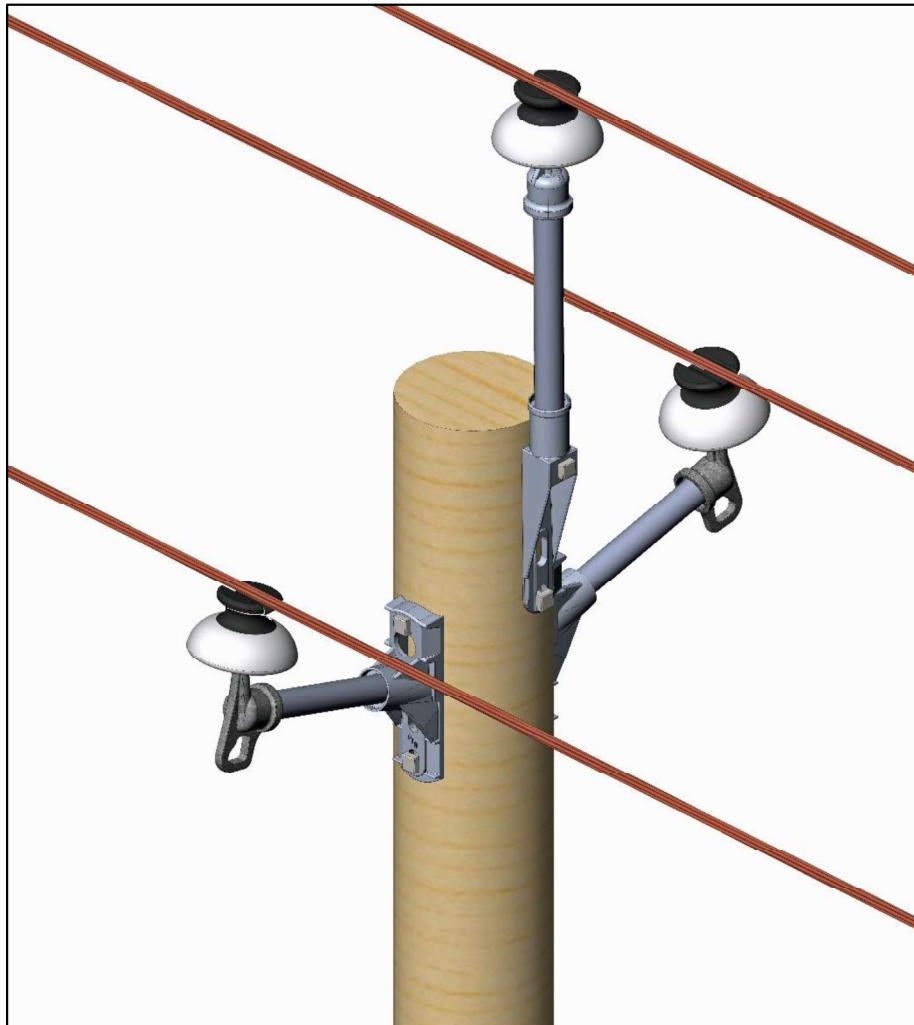

BUILD-A-BRACKET SINGLE PHASE CONDUCTOR SUPPORT BRACKETS

BUILD-A-BRACKET SYSTEM
NUMBERING KEY

FLH R - 1 - 18 - S 1

FLH PREFIX

RISE

OFFERINGS

R = FIFTEEN DEGREE, DOUBLE MOUNT
F = FIFTEEN DEGREE, IRON BASE

ROD DIAMETER

OFFERINGS

1 = 1-1/2" DIA

LENGTH

OFFERINGS

12 = 12"
15 = 15"
18 = 18"
21 = 21"
24 = 24"

THREADS

OFFERINGS

1 = 1" NYLON
3 = 1-3/8" NYLON

FITTING OPTION


OFFERINGS

S = STRAIGHT PIN POSITION
V = VERTICAL PIN POSITION



S

**STRAIGHT
PIN**



FLH-R

**KEYHOLE MOUNTING
1-1/2" DIAMETER
15° BASE (ALUM)**



FLH-F

**KEYHOLE MOUNTING
1-1/2" DIAMETER
15° BASE (IRON)**



V

**VERTICAL
PIN**

SINGLE PHASE 15° STRAIGHT CONDUCTOR SUPPORT BRACKETS

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: DUCTILE IRON, 654512

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHR-1-12-S1	12	1800	1200	1500
FLHR-1-15-S1	15	1500	1100	1500
FLHR-1-18-S1	18	1200	1000	1500
FLHR-1-21-S1	21	1125	925	1500
FLHR-1-24-S1	24	1050	800	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

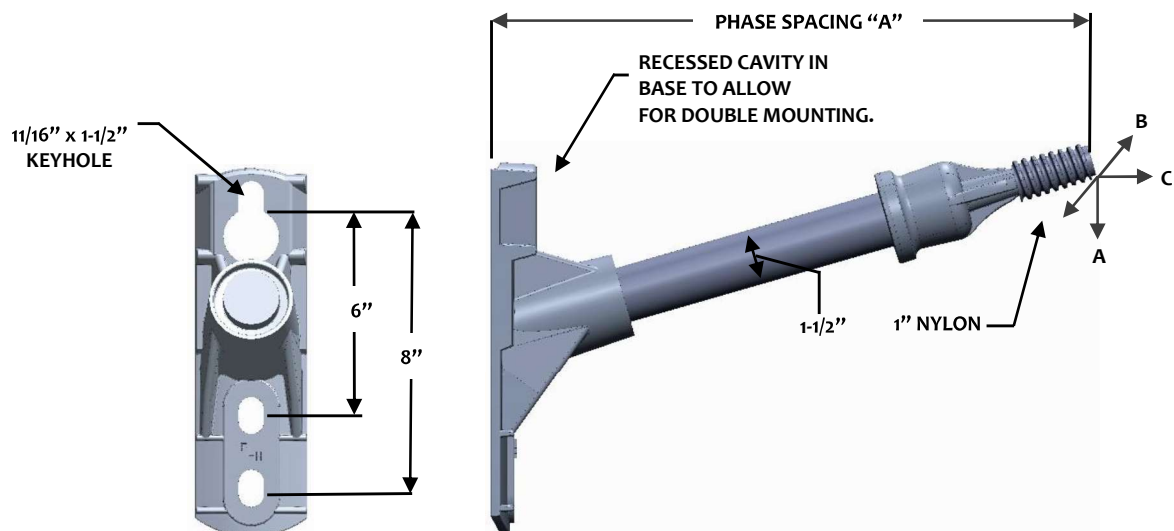

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLHR-1-12-S1-SC)

SINGLE PHASE 15° VERTICAL CONDUCTOR SUPPORT BRACKETS

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: DUCTILE IRON, 654512

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHR-1-12-V1	12	1800	1300	1500
FLHR-1-15-V1	15	1500	1100	1500
FLHR-1-18-V1	18	1200	900	1500
FLHR-1-21-V1	21	1125	800	1500
FLHR-1-24-V1	24	1050	700	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

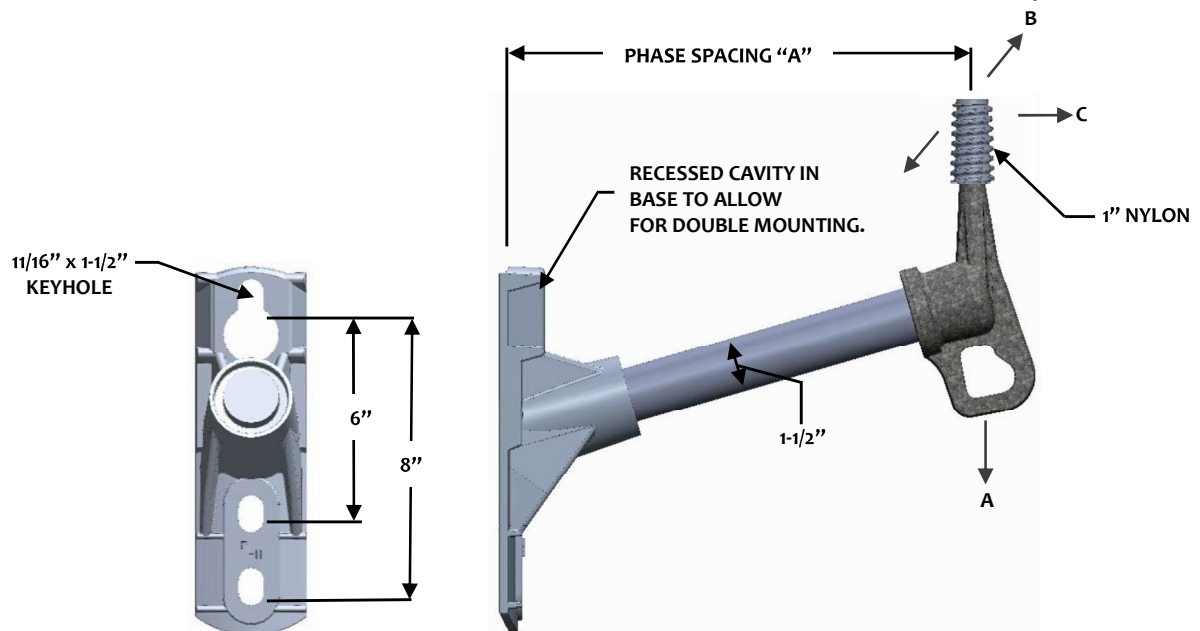

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLHR-1-12-V1-SC)

BUILD-A-BRACKET SINGLE PHASE CONDUCTOR SUPPORT BRACKETS

BUILD-A-BRACKET SYSTEM

NUMBERING KEY

FLH R – 2 – 18 – S 1

FLH PREFIX

RISE

OFFERINGS

R = FIFTEEN DEGREE, ALUMINUM
F = FIFTEEN DEGREE, IRON BASE

ROD DIAMETER

OFFERINGS

2 = 1-3/4" DIA

LENGTH

OFFERINGS

12 = 12"
15 = 15"
18 = 18"
21 = 21"
24 = 24"

THREADS

OFFERINGS

1 = 1" NYLON
3 = 1-3/8" NYLON

FITTING OPTION


OFFERINGS

S = STRAIGHT PIN POSITION
V = VERTICAL PIN POSITION




S

**STRAIGHT
PIN**

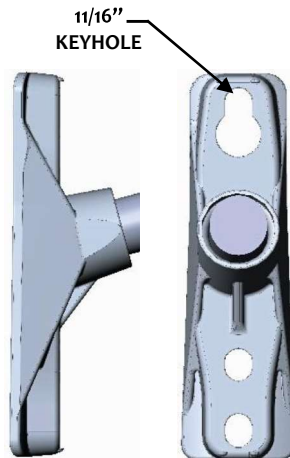

FLH-R

**KEYHOLE MOUNTING
1-3/4" DIAMETER
15° BASE**

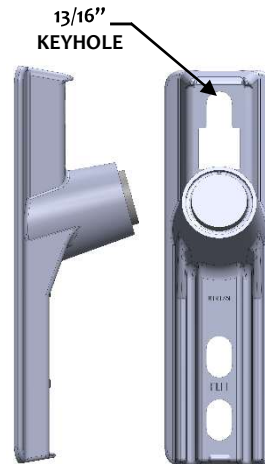

FLH-F

**KEYHOLE MOUNTING
1-3/4" DIAMETER
15° BASE**



V

**VERTICAL
PIN**

SINGLE PHASE 15° STRAIGHT CONDUCTOR SUPPORT BRACKETS

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: DUCTILE IRON, 654512

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHR-2-18-S1	18	2300	1400	1500
FLHR-2-20-S1	20	2100	1350	1500
FLHR-2-24-S1	24	1750	1200	1500
FLHR-2-27-S1	27	1550	1050	1500
FLHR-2-30-S1	30	1400	950	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

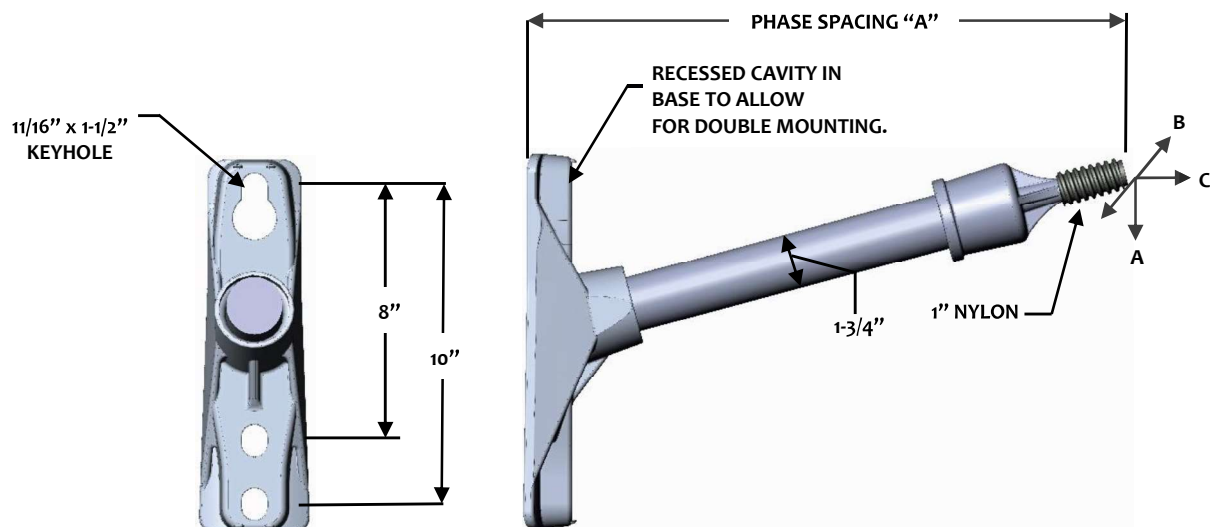

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLHR-2-18-S1-SC)

SINGLE PHASE 15° VERTICAL CONDUCTOR SUPPORT BRACKETS

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: DUCTILE IRON, 654512

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHR-2-12-V1	12	2550	2000	2500
FLHR-2-18-V1	18	2250	1900	2500
FLHR-2-24-V1	24	2100	1850	2500
FLHR-2-27-V1	27	1950	1800	2500
FLHR-2-30-V1	30	1800	1750	2500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

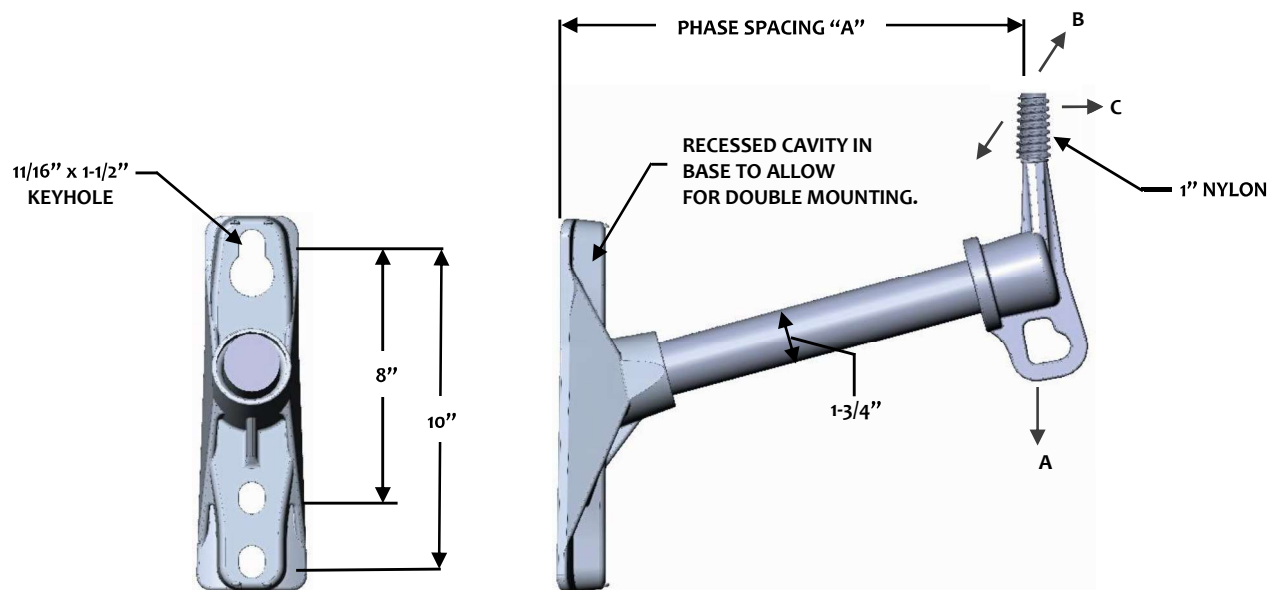

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLHR-2-18-V1-SC)