

BUILD-A-BRACKET DOUBLE PHASE CUTOUT & ARRESTOR BRACKETS

BUILD-A-BRACKET SYSTEM

NUMBERING KEY

FLH 2 - 1 - 36 - C 1 H

FLH PREFIX

DOUBLE PHASE

ROD DIAMETER

OFFERINGS
1 = 1-1/2" DIA

LENGTH


OFFERINGS
36 = 36"
42 = 42"
48 = 48"

HARDWARE

OFFERINGS
H = HARDWARE
BLANK = NO HARDWARE

FITTING OPTION

OFFERINGS
C1 = SINGLE POSITION MOUNT
C2 = TWO POSITION MOUNT
C3 = THREE POSITION MOUNT
C4 = SINGLE POSITION LONG MOUNT

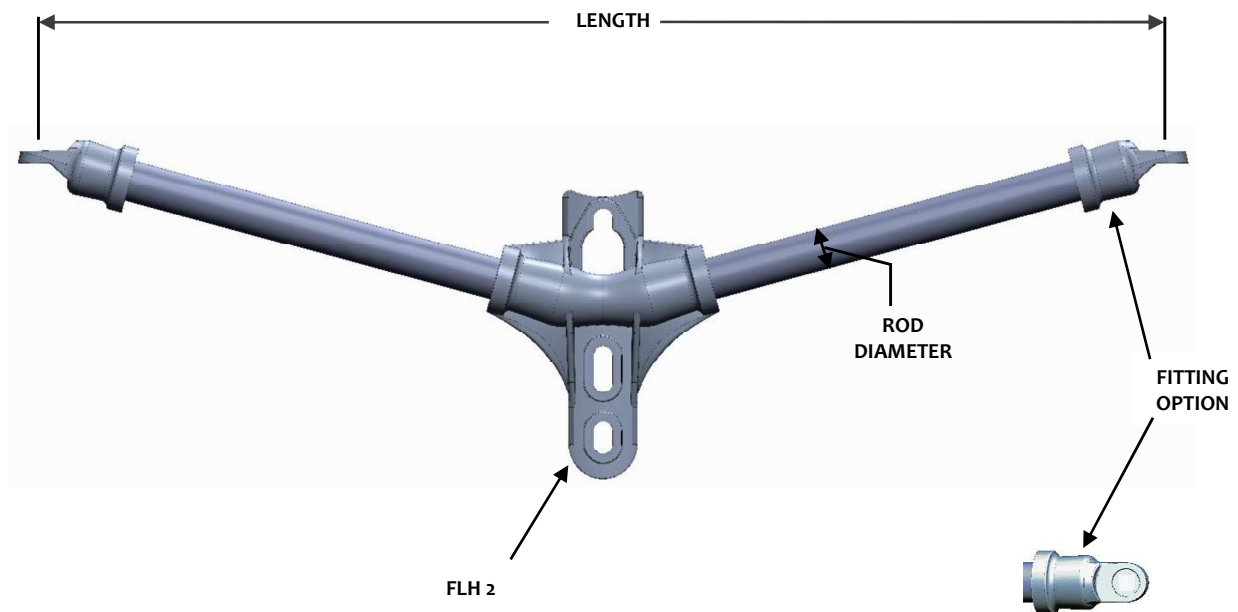

BUILD-A-BRACKET DOUBLE PHASE CUTOUT & ARRESTOR BRACKETS

BASE/FITTING OPTIONS



C1

1 MOUNTING
POSITION



C2

2 MOUNTING
POSITION




FLH2

15° DOUBLE PHASE BASE




C3

3 MOUNTING
POSITION



C4

1 MOUNTING
POSITION



C5


3 MOUNTING
POSITION
15° BASE

DOUBLE PHASE 15° CUTOUT & ARRESTOR BRACKET
SPECIFICATIONS

BASE: ALUMINUM, 356-T6
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.
FITTING: ALUMINUM, 356-T6
HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLH2-1-36-C1	36	1200	900	1500
FLH2-1-42-C1	42	950	800	1500
FLH2-1-48-C1	48	900	700	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

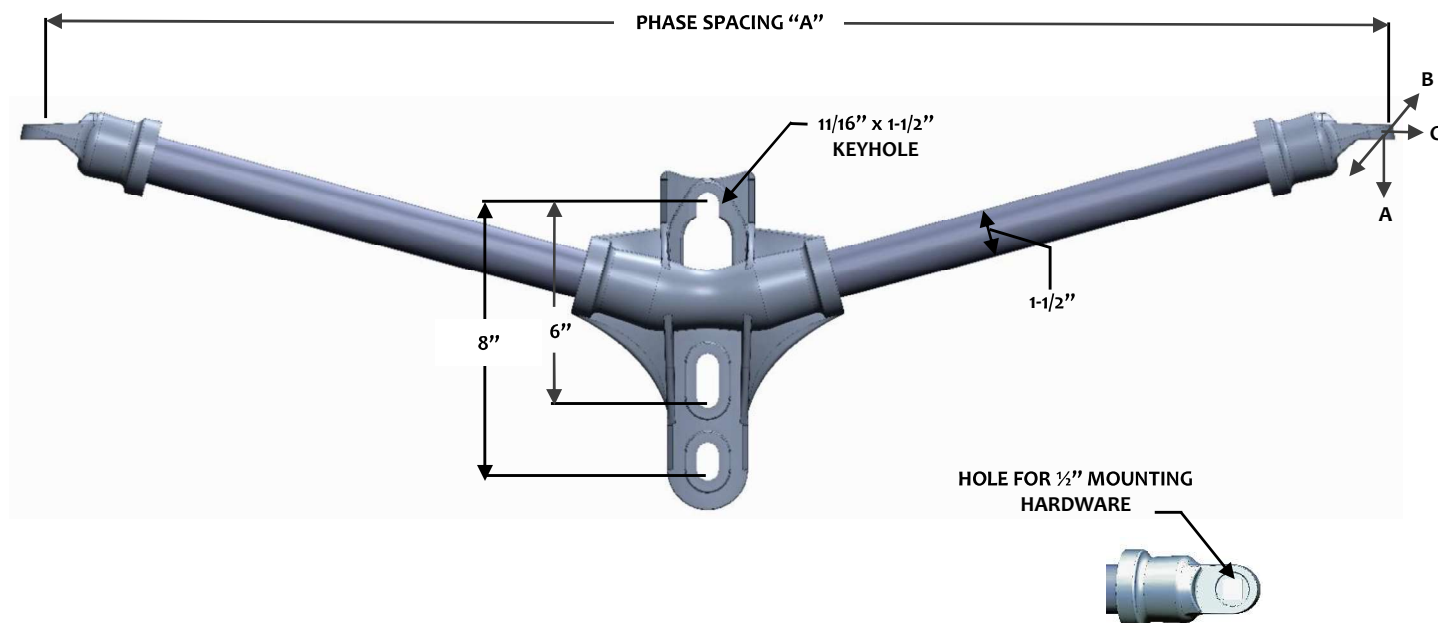
NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

FOR BRACKET WITH 1/2" CAPTIVE CARRIAGE BOLT, SHAKEPROOF WASHER, LOCK WASHER AND HEX NUT, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH2-1-36-C1-H)

FOR BRACKET WITH STRAP, ADD SUFFIX "S" TO CATALOG. (EXAMPLE: FLH2-1-36-C1-S)

FOR BRACKET WITH STRAP AND HARDWARE, ADD SUFFIX "SH" TO CATALOG. (EXAMPLE: FLH2-1-36-C1-SH)
 TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH2-1-36-C1-SC)

DOUBLE PHASE 15° CUTOUT & ARRESTOR BRACKET

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLH2-1-36-C2	36	1200	900	10,000
FLH2-1-42-C2	42	950	800	10,000
FLH2-1-48-C2	48	900	700	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

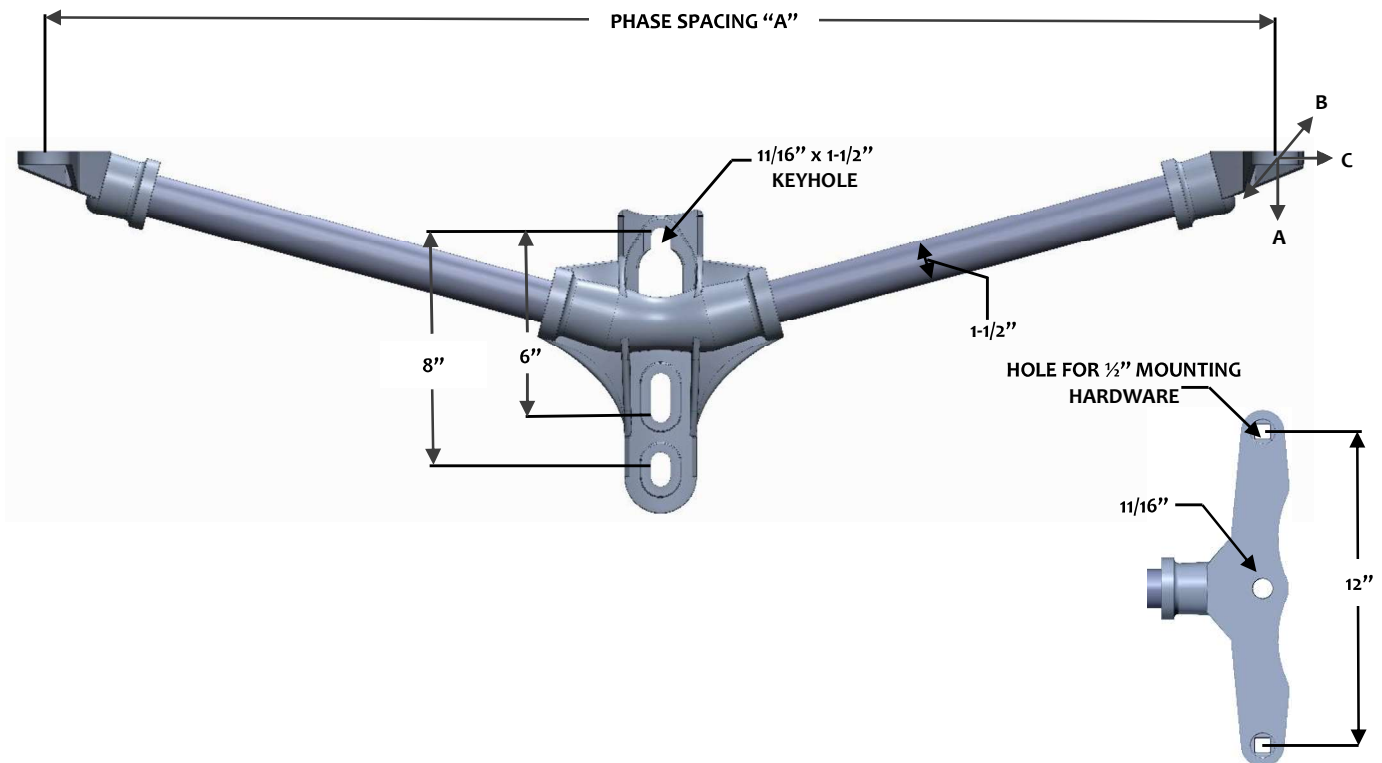

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US. FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG.

(EXAMPLE: FLH2-1-36-C2-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH2-1-36-C2-SC)

DOUBLE PHASE 15° CUTOUT & ARRESTOR BRACKET

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLH2-1-36-C3	36	1200	900	10,000
FLH2-1-42-C3	42	950	800	10,000
FLH2-1-48-C3	48	900	700	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

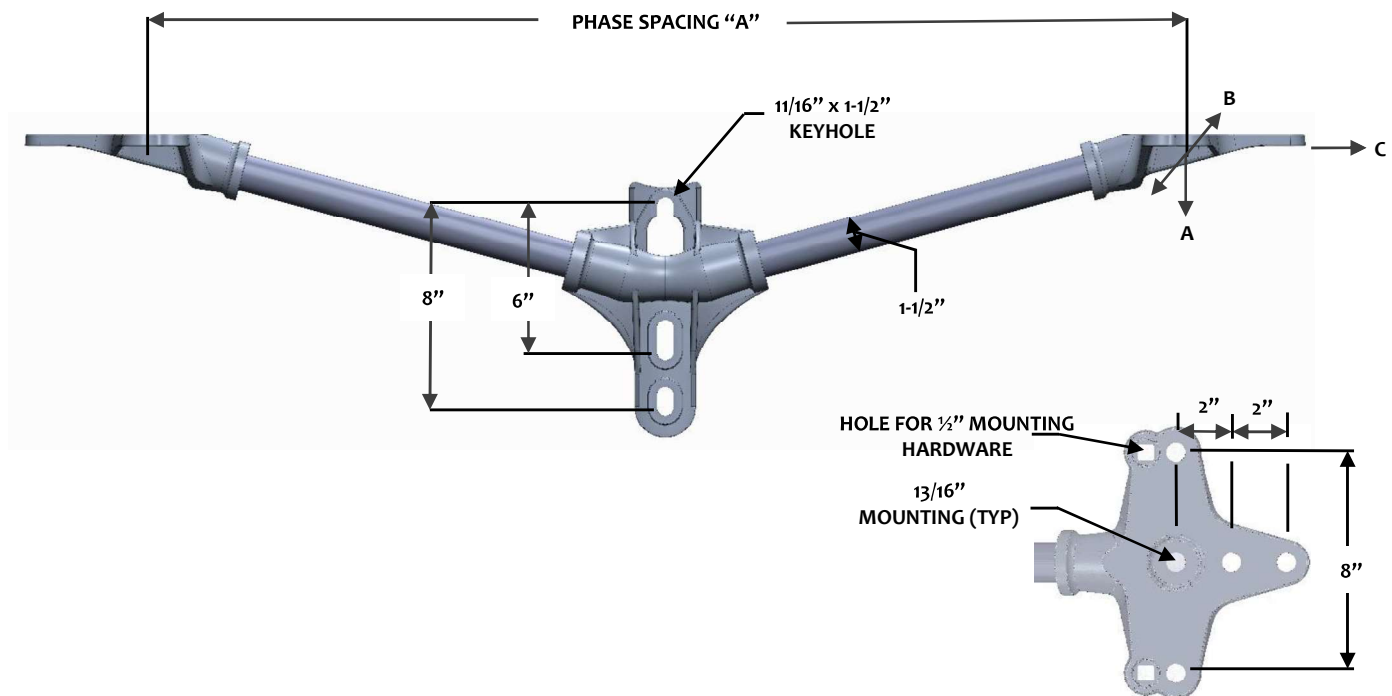

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US. FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG.

(EXAMPLE: FLH2-1-36-C3-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH2-1-36-C3-SC)

DOUBLE PHASE 15° CUTOUT & ARRESTOR BRACKET

SPECIFICATIONS

BASE: ALUMINUM, 356-T6



ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLH2-1-36-C4	36	1200	900	10,000
FLH2-1-42-C4	42	950	700	10,000
FLH2-1-48-C4	48	900	600	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

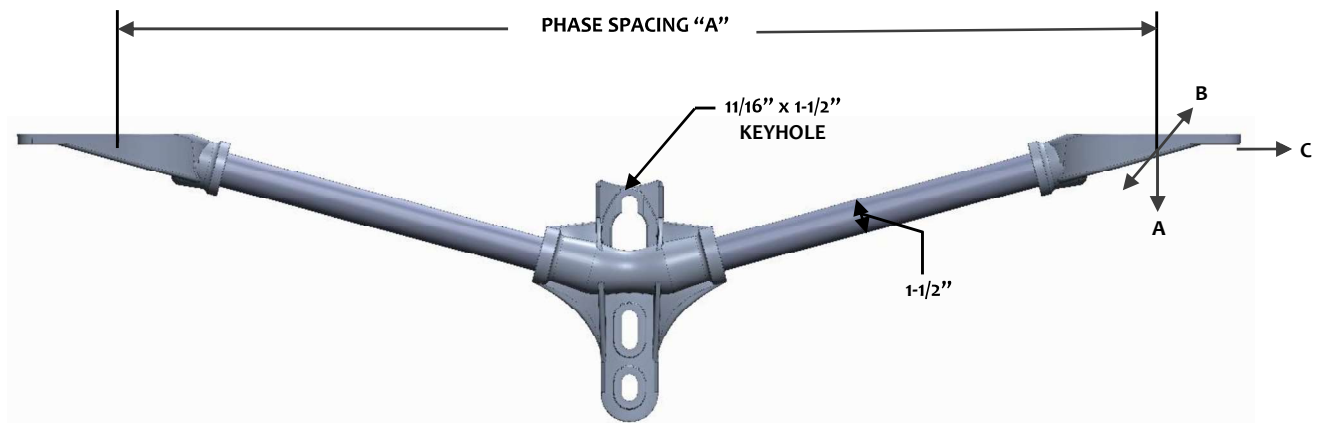

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US. FOR BRACKET WITH (1) 1/2" CAPTIVE CARRIAGE BOLT, SHAKEPROOF WASHER, LOCK WASHER AND HEX NUT, ADD SUFFIX "H" TO CATALOG.

(EXAMPLE: FLH2-1-36-C4-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH2-1-36-C4-SC)

DOUBLE PHASE 15° CUTOUT & ARRESTOR BRACKET
SPECIFICATIONS
BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLH2-1-36-C5	36	1200	900	10,000
FLH2-1-42-C5	42	950	700	10,000
FLH2-1-48-C5	48	900	600	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

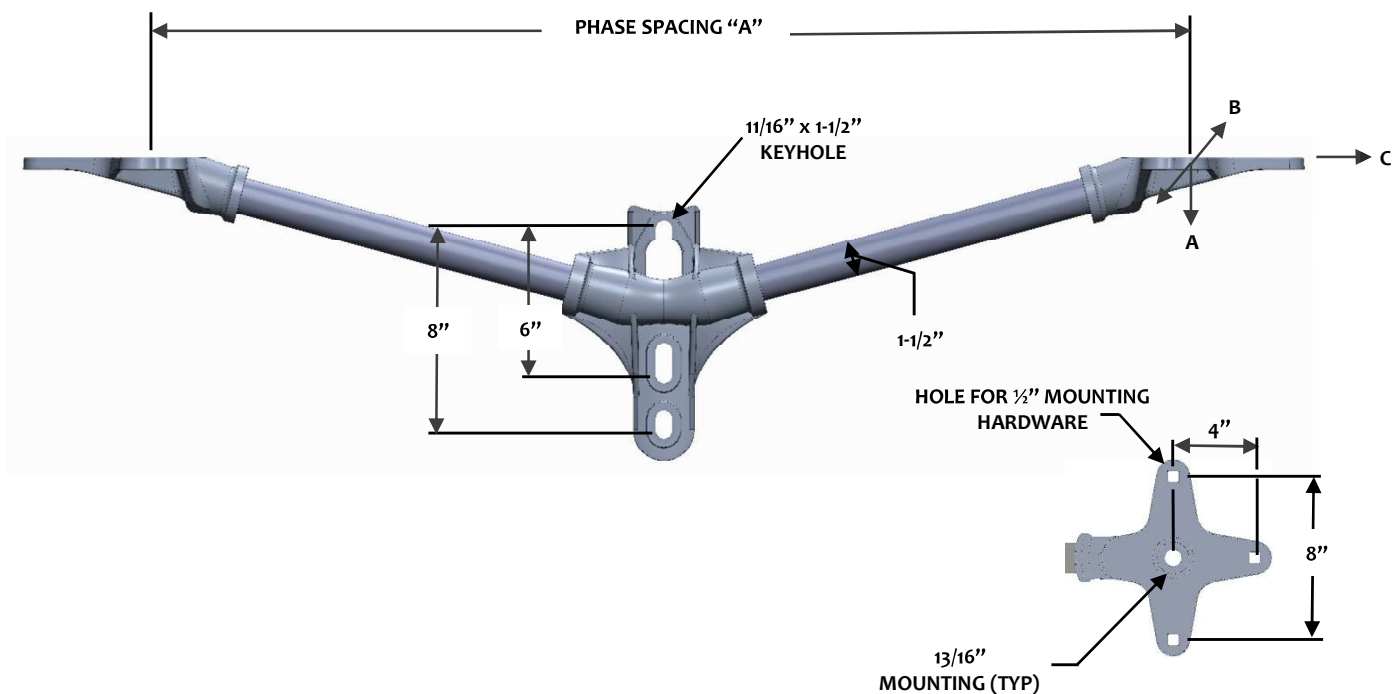
NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US. FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG.

(EXAMPLE: FLH2-1-36-C5-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH2-1-36-C5-SC)

BUILD-A-BRACKET DOUBLE PHASE CUTOUT & ARRESTOR BRACKETS

BUILD-A-BRACKET SYSTEM

NUMBERING KEY

FLH 2 - 2 - 36 - C 3 H

FLH PREFIX

DOUBLE PHASE

ROD DIAMETER

OFFERINGS
2 = 1-3/4" DIA

LENGTH


OFFERINGS
36 = 36"
42 = 42"
48 = 48"

HARDWARE

OFFERINGS
H = HARDWARE
BLANK = NO HARDWARE

FITTING OPTION

OFFERINGS
C2 = TWO POSITION MOUNT
C3 = THREE POSITION MOUNT

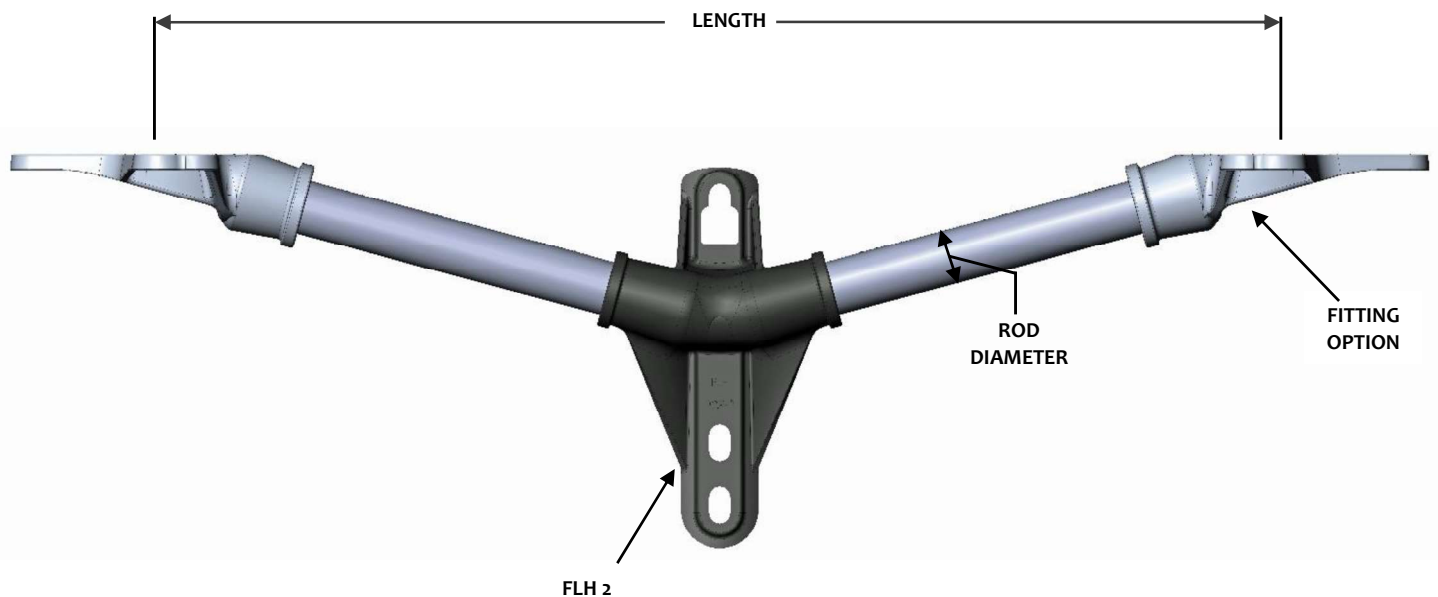


BUILD-A-BRACKET DOUBLE PHASE CUTOUT & ARRESTOR BRACKETS

BASE/FITTING OPTIONS



FLH2

15° DOUBLE PHASE BASE



C2

**2 MOUNTING
POSITION
15° BASE**



C3

**3 MOUNTING
POSITION
15° BASE**


DOUBLE PHASE 15° CUTOUT & ARRESTOR BRACKET

SPECIFICATIONS

BASE: DUCTILE IRON, 654512
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.
FITTING: ALUMINUM, 356-T6
HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLH2-2-36-C2	36	2600	1900	10,000
FLH2-2-42-C2	42	2400	1900	10,000
FLH2-2-48-C2	48	2200	1850	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

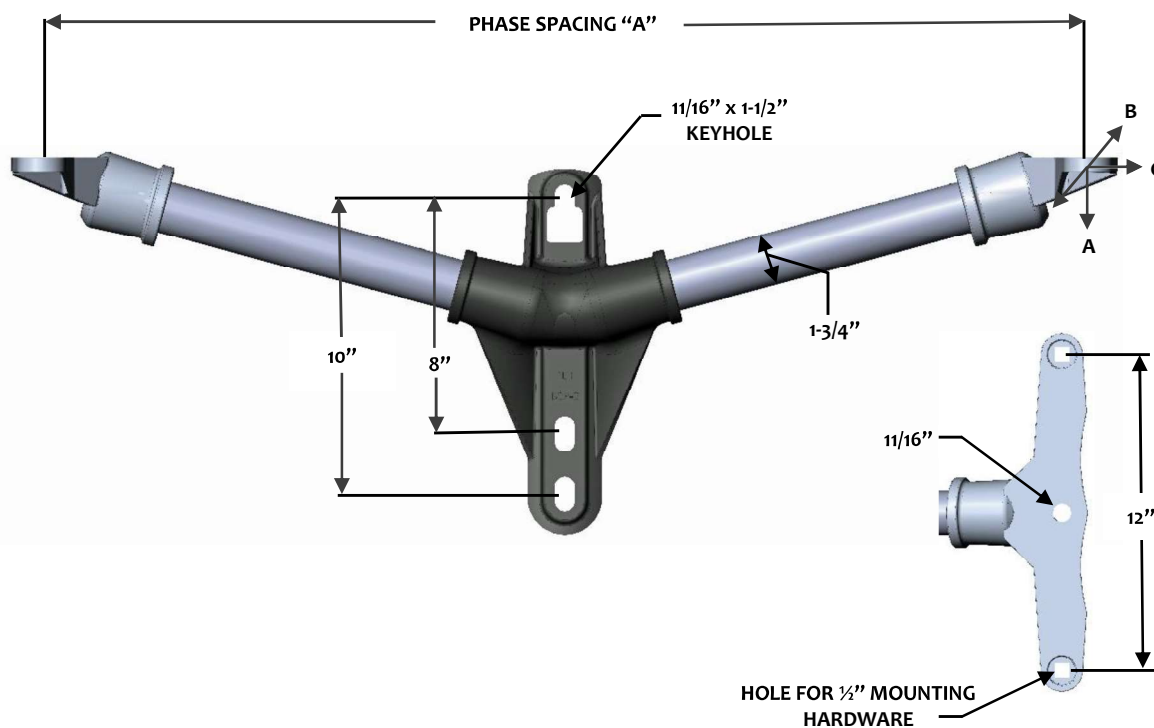

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US. FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG.

(EXAMPLE: FLH2-2-36C2-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH2-2-36-C2-SC)

DOUBLE PHASE 15° CUTOUT & ARRESTOR BRACKET
SPECIFICATIONS
BASE: DUCTILE IRON, 654512


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLH2-2-36-C3	36	2600	1900	10,000
FLH2-2-42-C3	42	2400	1900	10,000
FLH2-2-48-C3	48	2200	1850	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

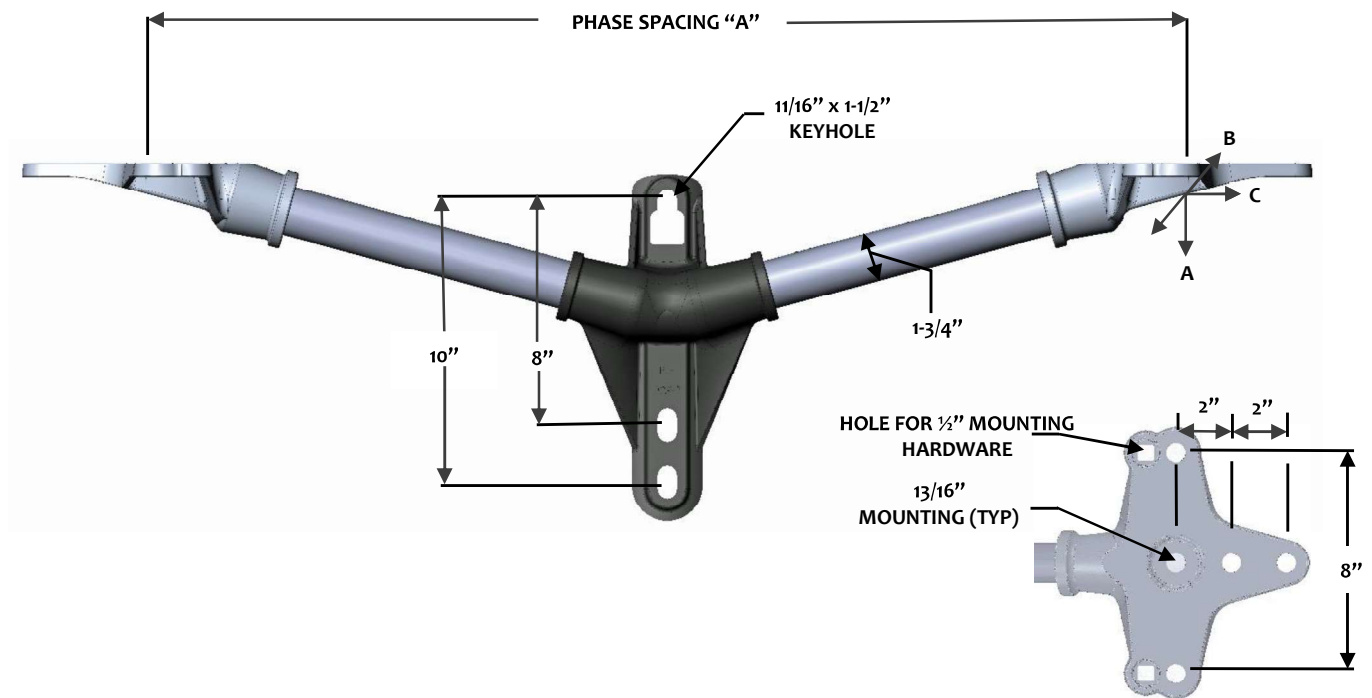
NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US. FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG.

(EXAMPLE: FLH2-2-36C3-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH2-2-36-C3-SC)