




CUTOUT & ARRESTOR
BRACKETS

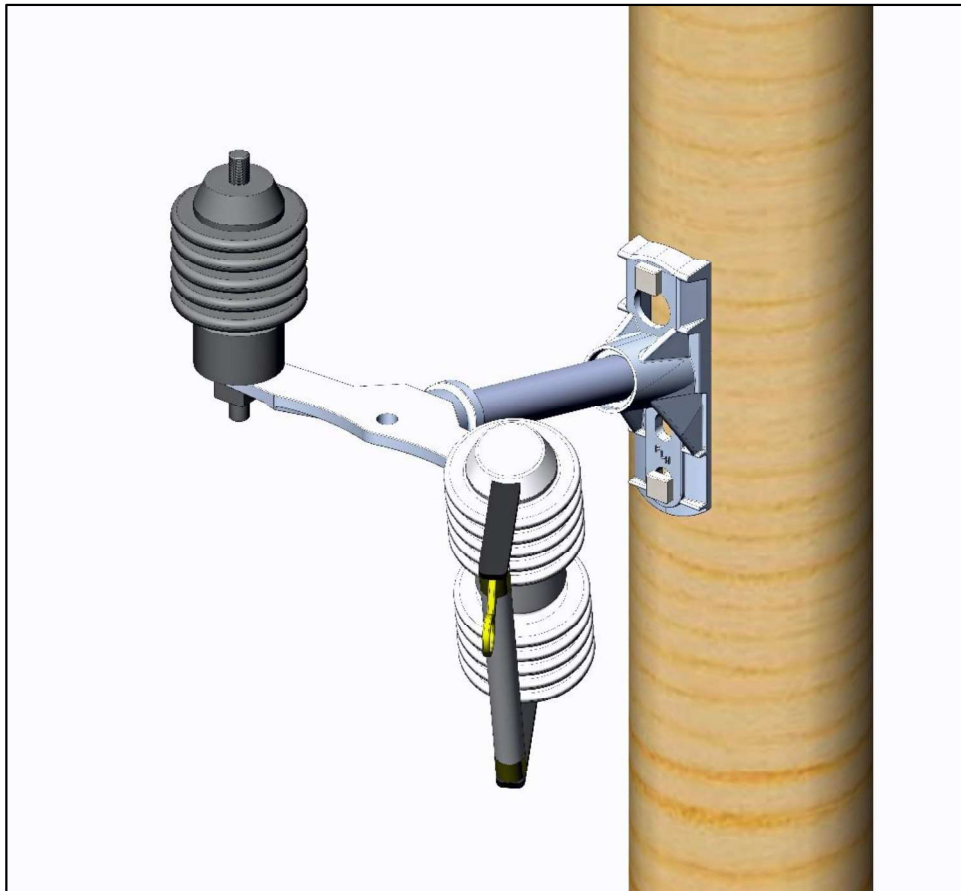

BUILD-A-BRACKET SINGLE PHASE CUTOUT & ARRESTOR BRACKETS

BUILD-A-BRACKET SYSTEM
NUMBERING KEY

FLH 0 - 1 - 18 - C 1 H

FLH PREFIX

RISE

OFFERINGS

0 = ZERO DEGREE

F = FIFTEEN DEGREE, IRON BASE

R = FIFTEEN DEGREE, DOUBLE MOUNT

L = FIFTEEN DEGREE, STANDARD MOUNT

ROD DIAMETER

OFFERINGS

1 = 1-1/2" DIA

LENGTH

OFFERINGS

12 = 12"

15 = 15"

18 = 18"

24 = 24"

HARDWARE

OFFERINGS

H = HARDWARE

S = STRAP (C1 FITTING ONLY)

BLANK = NO HARDWARE

FITTING OPTION


OFFERINGS

C1 = SINGLE POSITION MOUNT

C2 = TWO POSITION MOUNT

C3 = THREE POSITION MOUNT


C4 = SINGLE POSITION LONG MOUNT

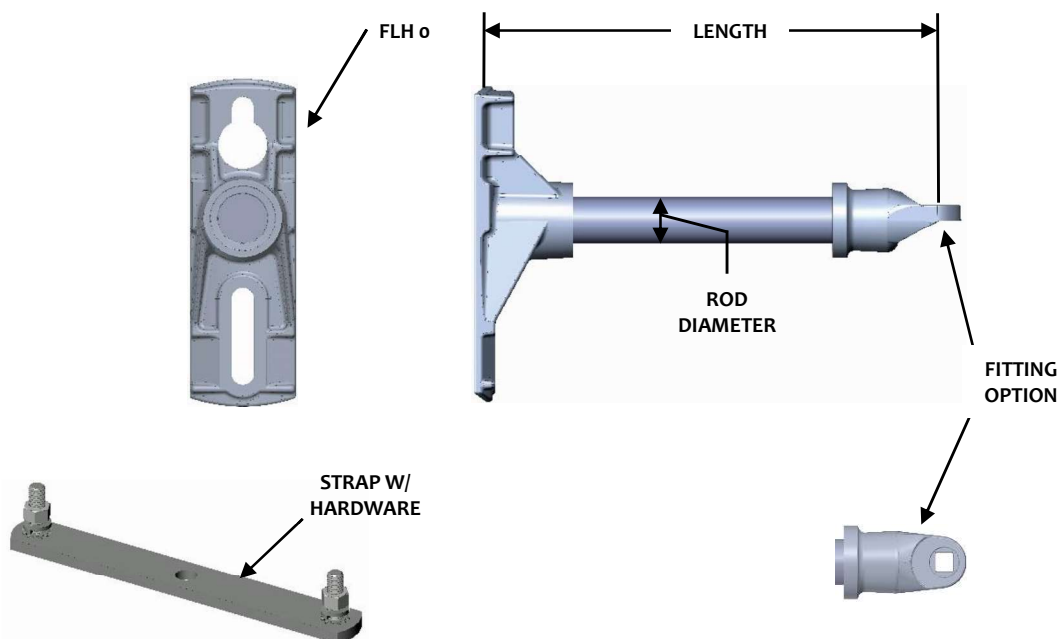

BUILD-A-BRACKET SINGLE PHASE CUTOUT & ARRESTOR BRACKETS
BASE/FITTING OPTIONS

C1


1 MOUNTING
POSITION
0° OR 15° BASE


C2


2 MOUNTING
POSITION
0° OR 15° BASE


C3


3 MOUNTING
POSITION
0° OR 15° BASE




C4

1 MOUNTING
POSITION
15° BASE


C5

3 MOUNTING
POSITION
15° BASE


FLH-o

FLH-F

FLH-R

FLH-L

BASE	ANGLE	MOUNT SPACING	DOUBLE NUT	MATERIAL
FLH-o	0°	6" – 8"	YES	ALUMINUM
FLH-F	15°	6" – 8"	NO	DUCTILE IRON
FLH-R	15°	6" – 8"	YES	ALUMINUM
FLH-L	15°	6" – 8"	NO	ALUMINUM

SINGLE PHASE 0° CUTOUT & ARRESTOR BRACKETS

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLH0-1-12-C1	12	1800	900	1500
FLH0-1-15-C1	15	1500	800	1500
FLH0-1-18-C1	18	1200	700	1500
FLH0-1-24-C1	24	900	500	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

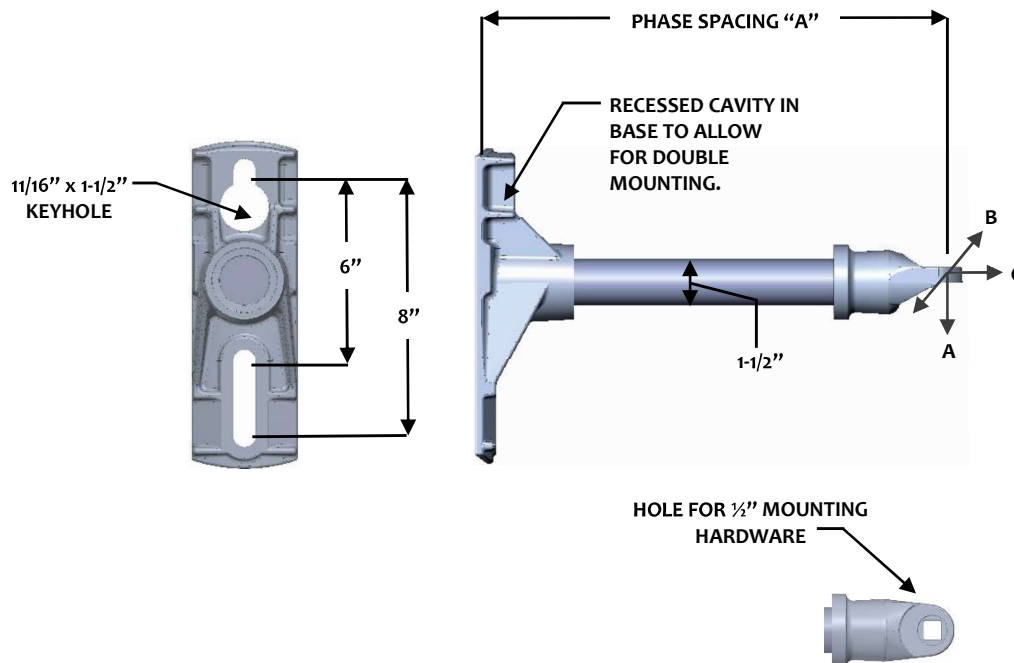

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

FOR BRACKET WITH 1/2" CAPTIVE CARRIAGE BOLT, SHAKEPROOF WASHER, LOCK WASHER AND HEX NUT, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH0-1-12C1-H)

FOR BRACKET WITH STRAP, ADD SUFFIX "S" TO CATALOG. (EXAMPLE: FLH0-1-12C1-S)

FOR BRACKET WITH STRAP AND HARDWARE, ADD SUFFIX "SH" TO CATALOG. (EXAMPLE: FLH0-1-12C1-SH)
 TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH0-1-12C1-SC)

SINGLE PHASE 15° CUTOUT & ARRESTOR BRACKETS

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHR-1-12-C1	12	1800	1400	1500
FLHR-1-15-C1	15	1500	1150	1500
FLHR-1-18-C1	18	1200	900	1500
FLHR-1-24-C1	24	900	650	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

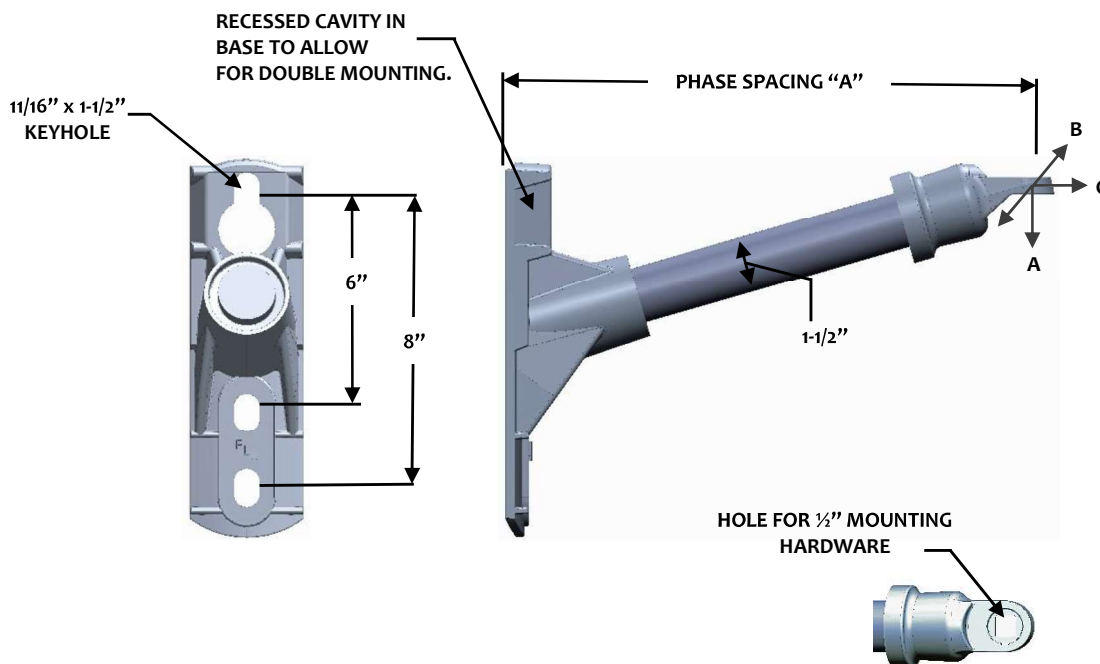

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

TO SPECIFY OTHER BASE OPTION, CHANGE FLHR WITH FLHF OR FLHL AS PREFERRED.

FOR BRACKET WITH 1/2" CAPTIVE CARRIAGE BOLT, SHAKEPROOF WASHER, LOCK WASHER AND HEX NUT, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH0-1-12C1-H)

FOR BRACKET WITH STRAP, ADD SUFFIX "S" TO CATALOG. (EXAMPLE: FLHR-1-12C1-S)

FOR BRACKET WITH STRAP AND HARDWARE, ADD SUFFIX "SH" TO CATALOG. (EXAMPLE: FLHR-1-12C1-SH)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLHR-1-12-C1-SC)

SINGLE PHASE 0° CUTOUT & ARRESTOR BRACKETS

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLH0-1-12-C2	12	1800	900	10,000
FLH0-1-15-C2	15	1500	800	10,000
FLH0-1-18-C2	18	1200	700	10,000
FLH0-1-24-C2	24	900	500	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

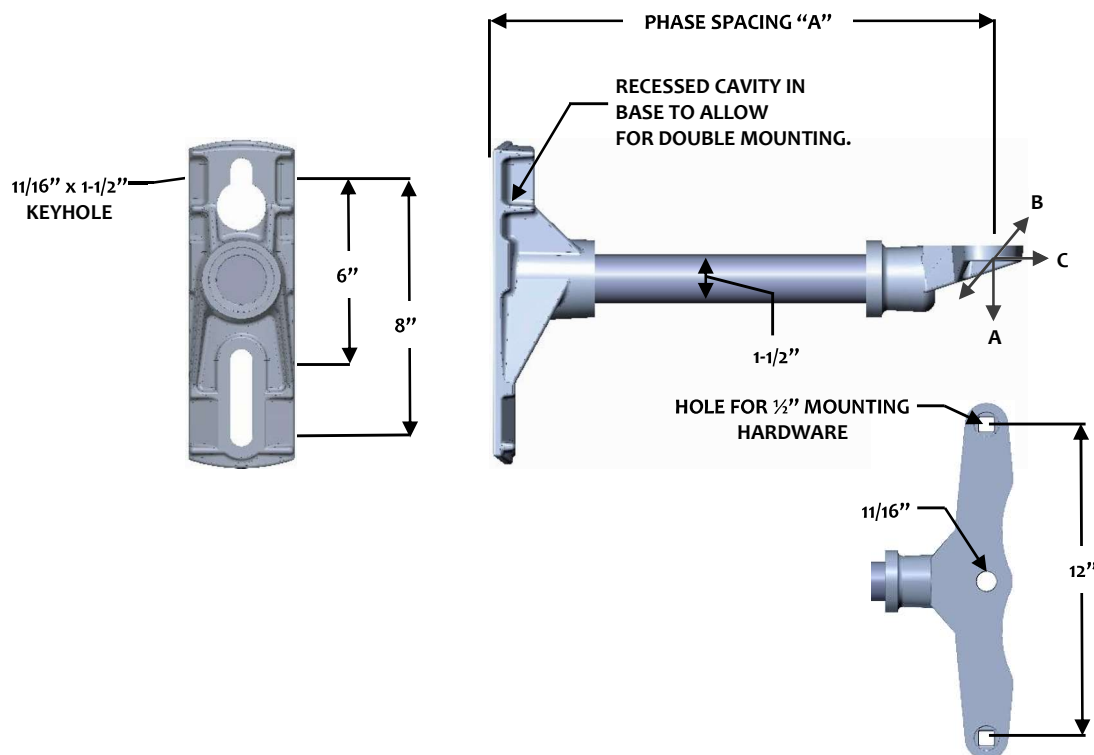

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US. FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG.

(EXAMPLE: FLH0-1-12C2-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH0-1-12-C2-SC)

SINGLE PHASE 15° CUTOUT & ARRESTOR BRACKETS

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHR-1-12-C2	12	1800	1400	10,000
FLHR-1-15-C2	15	1500	1150	10,000
FLHR-1-18-C2	18	1200	900	10,000
FLHR-1-24-C2	24	900	700	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

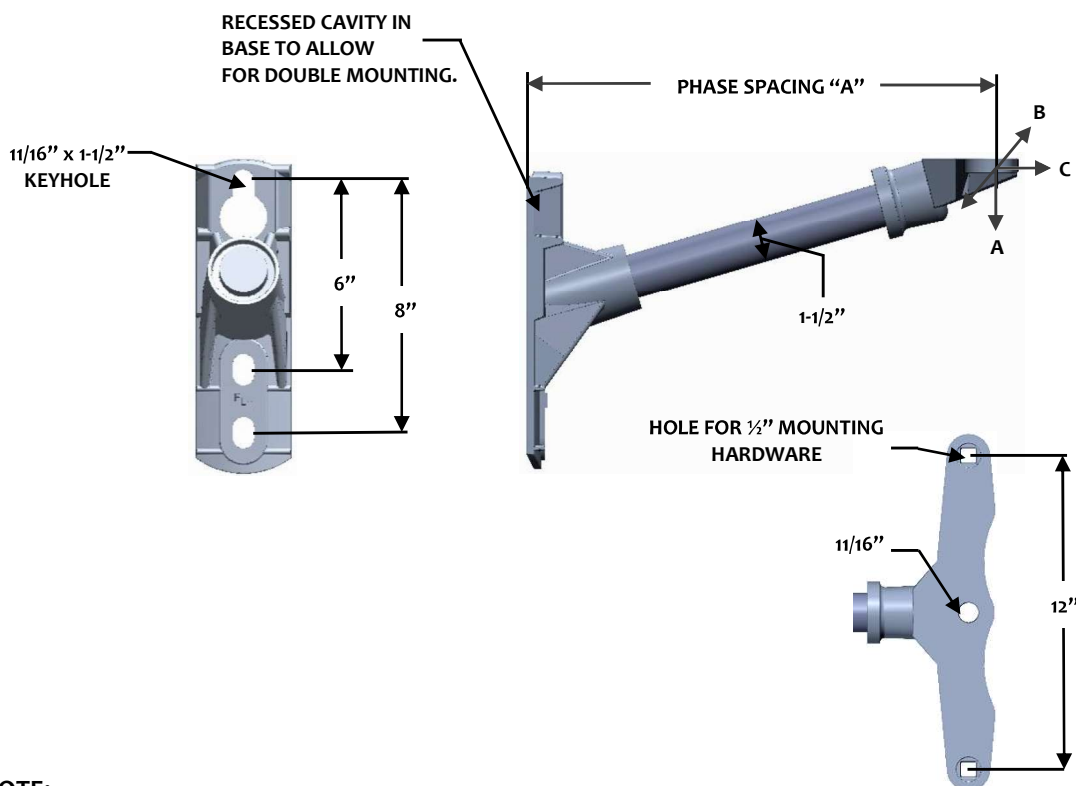

NOTE:

TO SPECIFY OTHER BASE OPTION, CHANGE FLHR WITH FLHF OR FLHL AS PREFERRED.

FOR OTHER LENGTHS PLEASE CONTACT US. FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG.

(EXAMPLE: FLHR-1-12C2-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLHR-1-12-C2-SC)

SINGLE PHASE 15° CUTOUT & ARRESTOR BRACKET

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
STANDARD COATING		VERTICAL A	LONG B	TRANS. C
FLH0-1-12-C3	12	1800	900	10,000
FLH0-1-15-C3	15	1500	800	10,000
FLH0-1-18-C3	18	1200	700	10,000
FLH0-1-24-C3	24	900	500	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

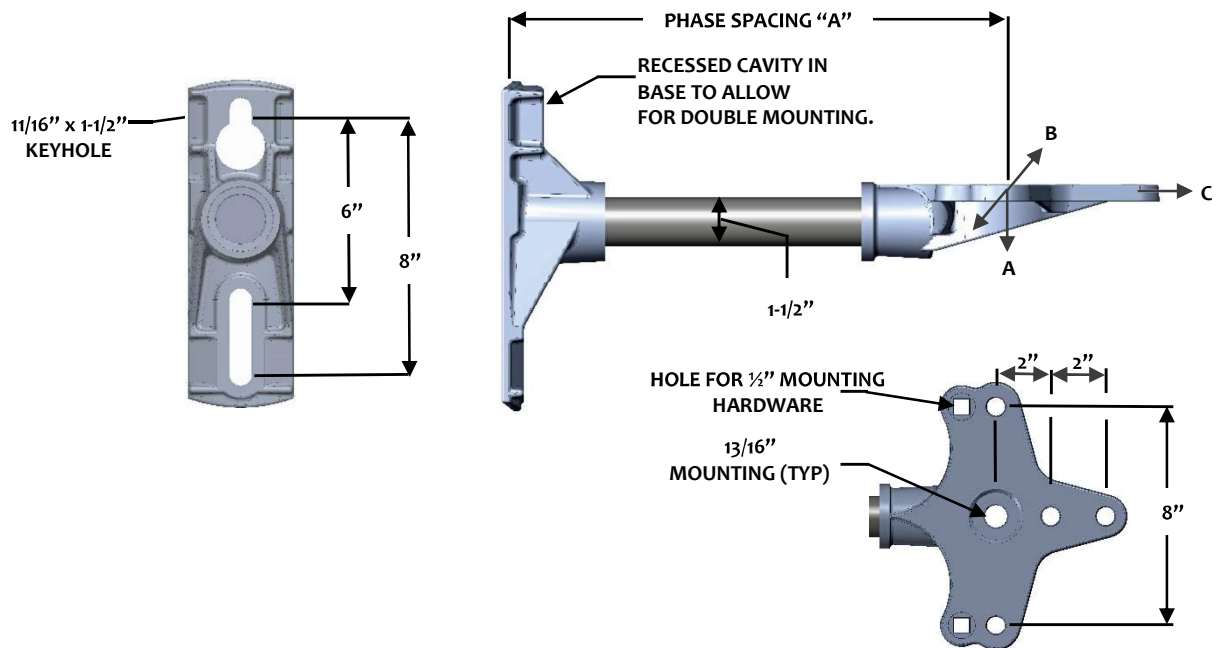

NOTE:

TO SPECIFY OTHER BASE OPTION, CHANGE FLHR WITH FLHF OR FLHL AS PREFERRED.

FOR OTHER LENGTHS PLEASE CONTACT US. FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG.

(EXAMPLE: FLH0-1-12C3-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH0-1-12-C3-SC)

SINGLE PHASE 15° CUTOUT & ARRESTOR BRACKET

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHR-1-12-C3	12	1800	1400	10,000
FLHR-1-15-C3	15	1500	1150	10,000
FLHR-1-18-C3	18	1200	900	10,000
FLHR-1-24-C3	24	900	700	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

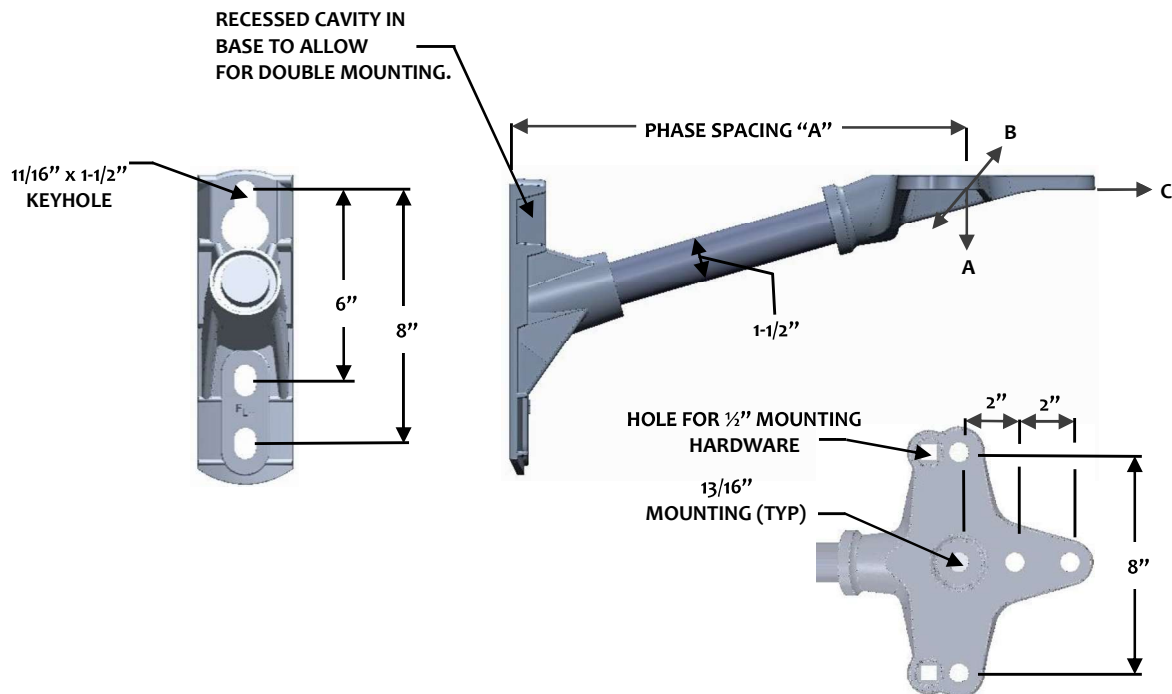

NOTE:

TO SPECIFY OTHER BASE OPTION, CHANGE FLHR WITH FLHF OR FLHL AS PREFERRED.

FOR OTHER LENGTHS PLEASE CONTACT US. FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG.

(EXAMPLE: FLHR-1-12C3-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLHR-1-12-C3-SC)

SINGLE PHASE 15° CUTOUT & ARRESTOR BRACKET

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHR-1-12-C4	12	1800	1400	10,000
FLHR-1-15-C4	15	1500	1150	10,000
FLHR-1-18-C4	18	1200	900	10,000
FLHR-1-24-C4	24	900	700	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

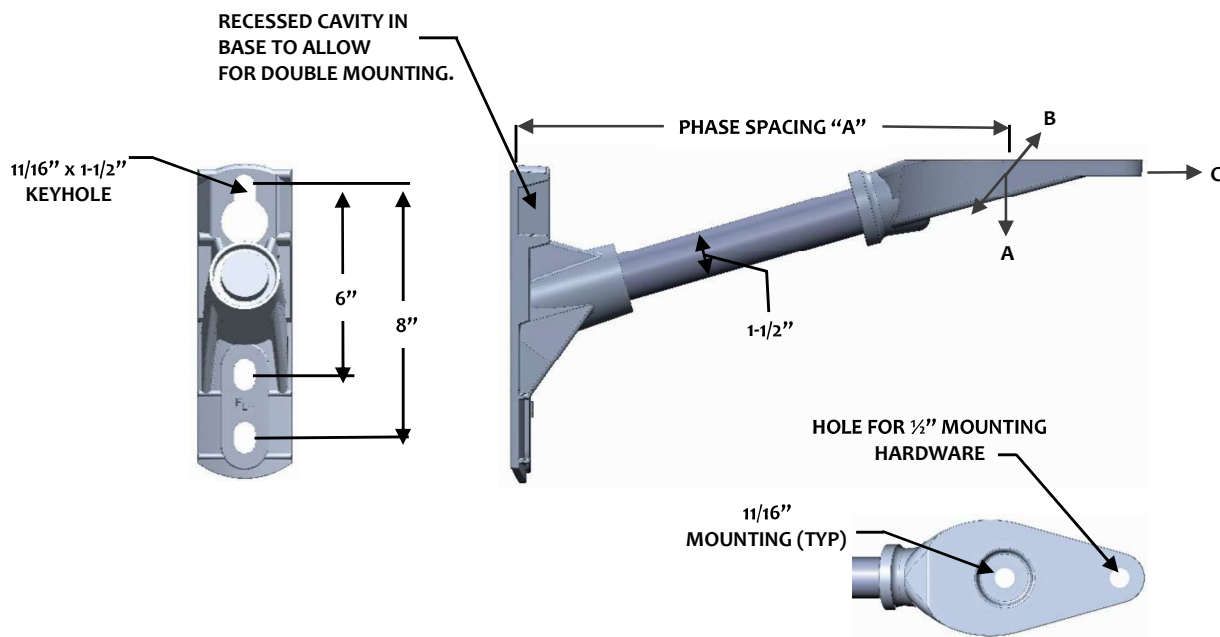

NOTE:

TO SPECIFY OTHER BASE OPTION, CHANGE FLHR WITH FLHF OR FLHL AS PREFERRED.

FOR OTHER LENGTHS PLEASE CONTACT US. FOR BRACKET WITH (1) 1/2" CAPTIVE CARRIAGE BOLT, SHAKEPROOF WASHER, LOCK WASHER AND HEX NUT, ADD SUFFIX "H" TO CATALOG.

(EXAMPLE: FLHR-1-12C4-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLHR-1-12-C4-SC)


SINGLE PHASE 15° CUTOUT & ARRESTOR BRACKET

SPECIFICATIONS

BASE: ALUMINUM, 356-T6
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.
FITTING: ALUMINUM, 356-T6
HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHR-1-12-C5	12	1800	1400	10,000
FLHR-1-15-C5	15	1500	1150	10,000
FLHR-1-18-C5	18	1200	900	10,000
FLHR-1-24-C5	24	900	700	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

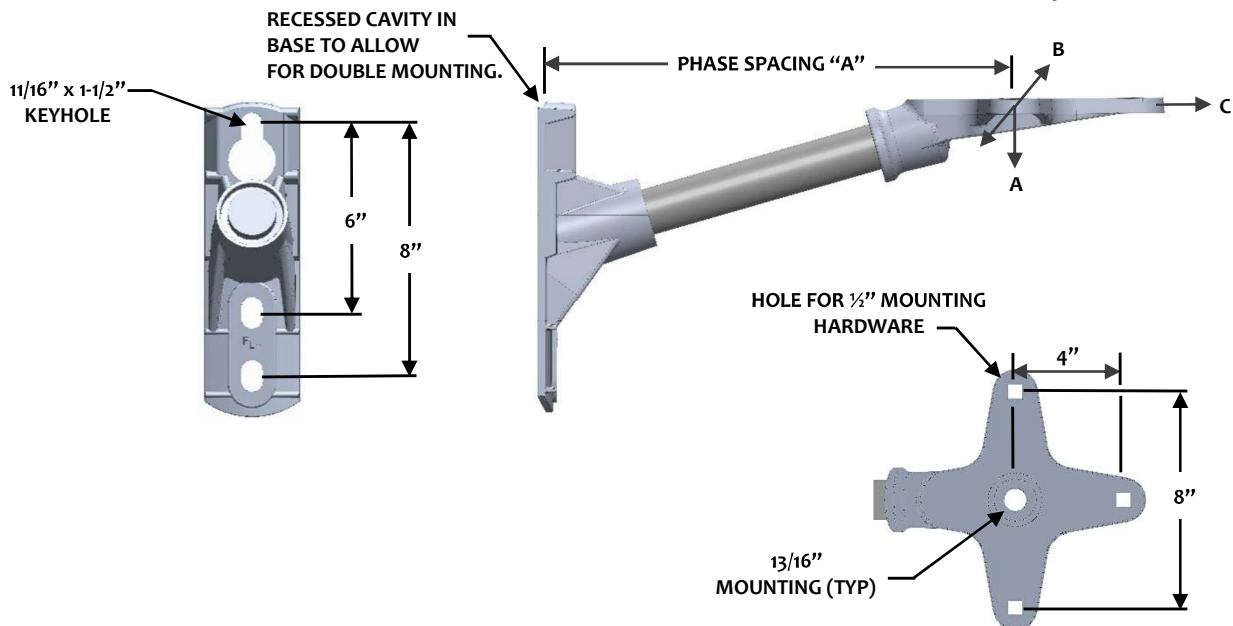

NOTE:

TO SPECIFY OTHER BASE OPTION, CHANGE FLHR WITH FLHF OR FLHL AS PREFERRED.
 FOR OTHER LENGTHS PLEASE CONTACT US. FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG.
 (EXAMPLE: FLHR-1-12C5-H)
 TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLHR-1-12-C5-SC)

BUILD-A-BRACKET SINGLE PHASE CUTOUT & ARRESTOR BRACKETS

BUILD-A-BRACKET SYSTEM
NUMBERING KEY

FLH R - 2 - 18 - C 3 H

FLH PREFIX

RISE

OFFERINGS

R = FIFTEEN DEGREE, ALUMINUM

F = FIFTEEN DEGREE, IRON BASE

ROD DIAMETER

OFFERINGS

2 = 1-3/4" DIA

LENGTH

OFFERINGS

12 = 12"

15 = 15"

18 = 18"

24 = 24"

HARDWARE

OFFERINGS

H = HARDWARE


BLANK = NO HARDWARE

FITTING OPTION

OFFERINGS

C2 = TWO POSITION MOUNT

C3 = THREE POSITION MOUNT

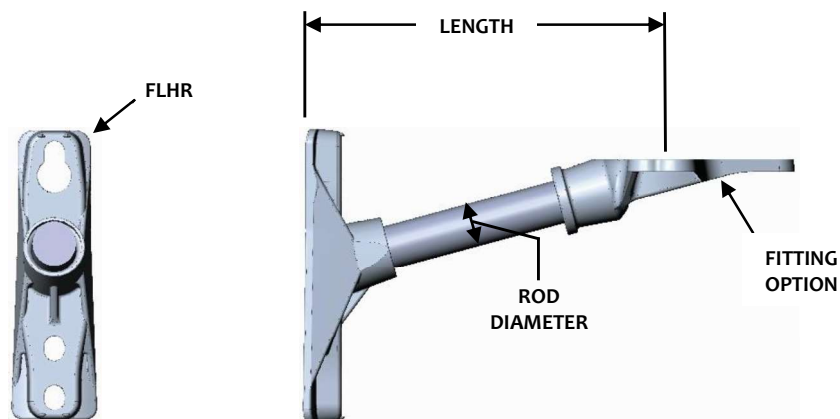

BUILD-A-BRACKET SINGLE PHASE CUTOUT & ARRESTOR BRACKETS

BASE/FITTING OPTIONS




C2

2 MOUNTING
POSITION
15° BASE




C3

3 MOUNTING
POSITION
15° BASE

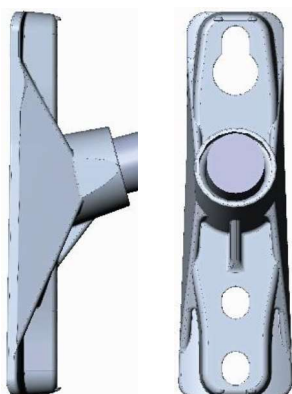

FLH-R

KEYHOLE MOUNTING
1-3/4" DIAMETER
15° BASE

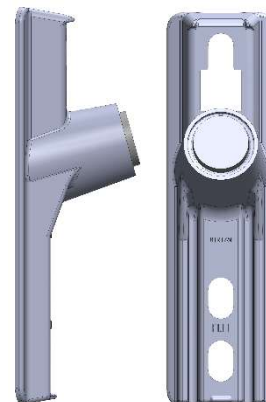

FLH-F

KEYHOLE MOUNTING
1-3/4" DIAMETER
15° BASE

BASE	ANGLE	MOUNTING HDW	MOUNT SPACING	DOUBLE NUT	MATERIAL
FLH-F	15°	3/4"	8" – 10"	YES	DUCTILE IRON
FLH-R	15°	5/8"	8" – 10"	YES	ALUMINUM

SINGLE PHASE 15° CUTOUT & ARRESTOR BRACKET

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHR-2-18-C2	18	2250	1400	10,000
FLHR-2-21-C2	21	2000	1250	10,000
FLHR-2-24-C2	24	1750	1100	10,000
FLHR-2-27-C2	27	1500	950	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

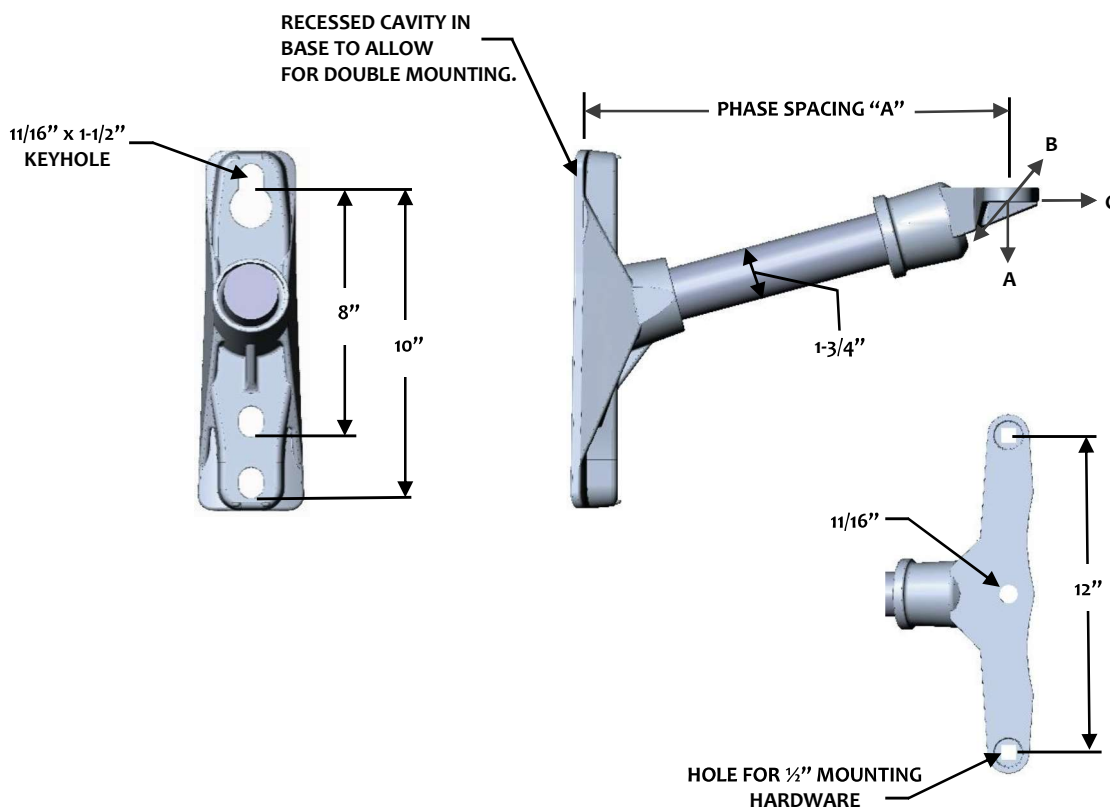

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US. FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG.

(EXAMPLE: FLHR-2-12C2-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLHR-2-18-C2-SC)

SINGLE PHASE 15° CUTOUT & ARRESTOR BRACKET

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHR-2-18-C3	18	2250	1400	10,000
FLHR-2-21-C3	21	2000	1250	10,000
FLHR-2-24-C3	24	1750	1100	10,000
FLHR-2-27-C3	27	1500	950	10,000
FLHR-2-30-C3	30	1200	800	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

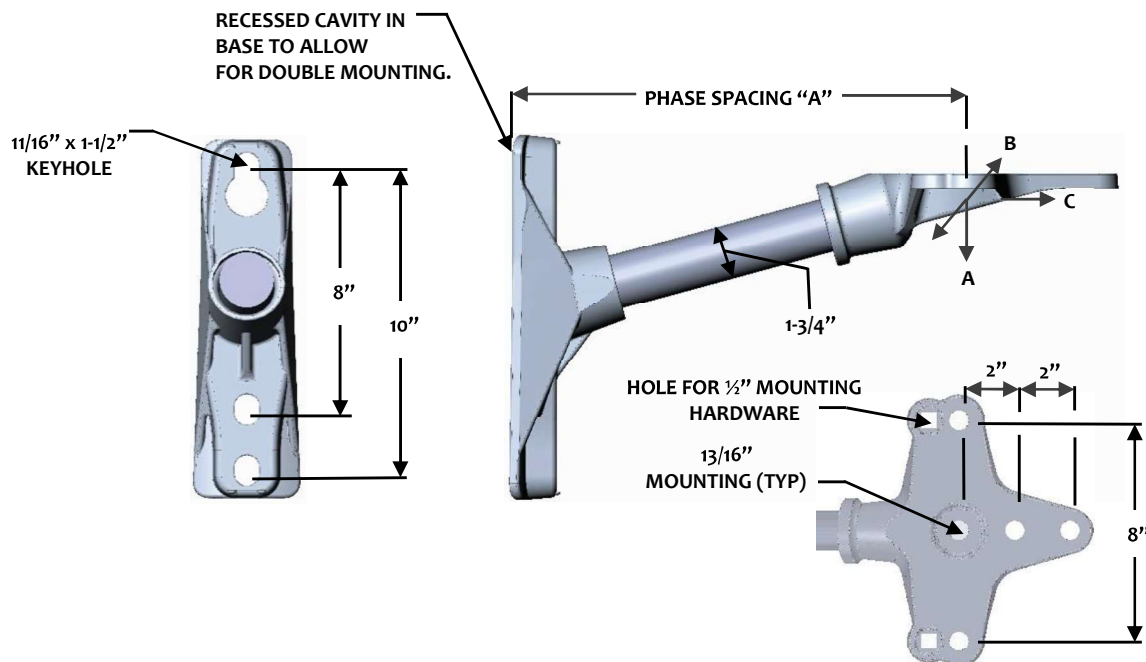

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US. FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG.

(EXAMPLE: FLHR-2-12C3-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLHR-2-18-C3-SC)