

BUILD-A-BRACKET TRIPLE PHASE CUTOUT & ARRESTOR BRACKETS

BUILD-A-BRACKET SYSTEM
NUMBERING KEY

FLH 3 - 0 - 1 - 3613 - C 1 H

FLH PREFIX

TRIPLE PHASE

RISE

OFFERINGS

0 = ZERO DEGREE

R = FIFTEEN DEGREE

ROD DIAMETER

OFFERINGS

1 = 1-1/2" DIA

OUTSIDE ROD LENGTH

OFFERINGS

36 = 36"

42 = 42"

48 = 48"

HARDWARE

OFFERINGS

H = HARDWARE

BLANK = NO HARDWARE

FITTING OPTION

OFFERINGS

C1 = SINGLE POSITION MOUNT

C2 = TWO POSITION MOUNT

C3 = THREE POSITION MOUNT

C4 = SINGLE POSITION LONG MOUNT

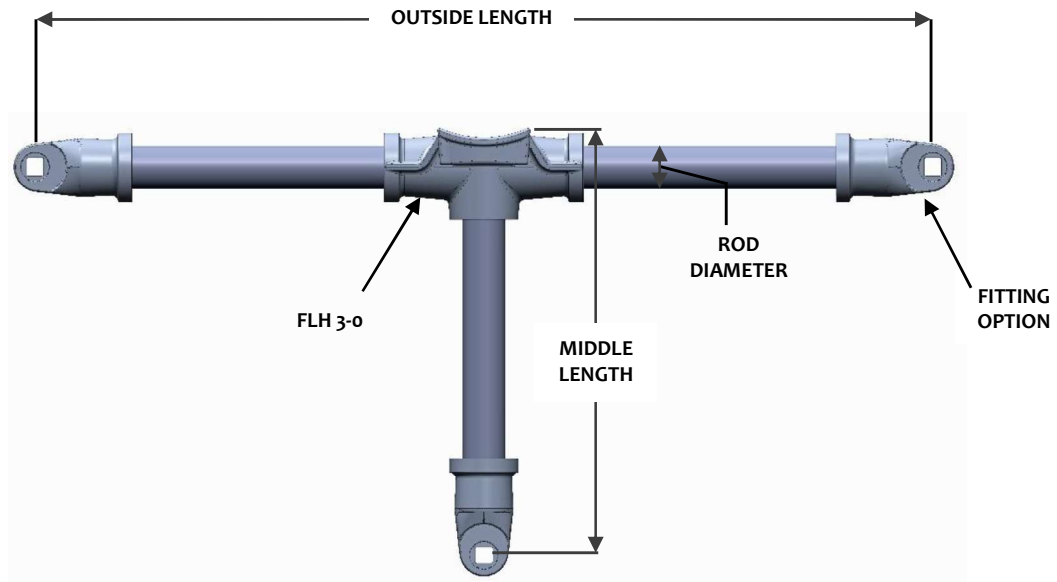
MIDDLE ROD LENGTH

OFFERINGS

13 = 13"

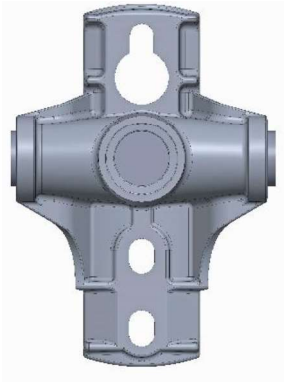
18 = 18"

24 = 24"



BUILD-A-BRACKET TRIPLE PHASE CUTOUT & ARRESTOR BRACKETS

BASE/FITTING OPTIONS



FLH3-0
0° TRIPLE PHASE BASE




FLH3
15° TRIPLE PHASE BASE



FLH3F
0° TRIPLE PHASE BASE
(FRONT SWEEP)



C2
2 MOUNTING
POSITION
0° OR 15° BASE



C4
1 MOUNTING
POSITION
15° BASE



C1
1 MOUNTING
POSITION
0° OR 15° BASE



C3
3 MOUNTING
POSITION
0° OR 15° BASE



C5
3 MOUNTING
POSITION
15° BASE

TRIPLE PHASE 0° CUTOUT & ARRESTOR BRACKETS
SPECIFICATIONS
BASE: ALUMINUM, 356-T6

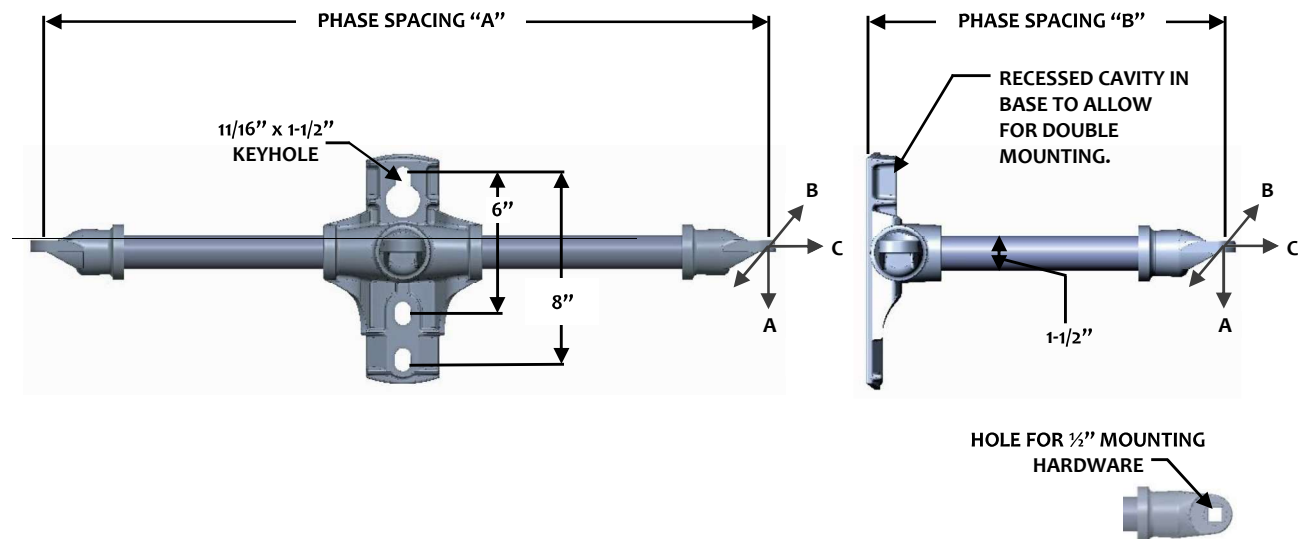
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	PHASE SPACING "B" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
			VERTICAL A	LONG B	TRANS. C
FLH30-1-3613-C1	36	13	1200	900	1500
FLH30-1-3618-C1	36	18	1200	900	1500
FLH30-1-4813-C1	48	13	900	700	1500
FLH30-1-4818-C1	48	18	900	700	1500
FLH30-1-4824-C1	48	24	900	700	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED


NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

FOR BRACKET WITH (1) 1/2" CAPTIVE CARRIAGE BOLT, SHAKEPROOF WASHER, LOCK WASHER AND HEX NUT, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH30-1-3613-C1-H)

FOR BRACKET WITH STRAP, ADD SUFFIX "S" TO CATALOG. (EXAMPLE: FLH30-1-3613-C1-S)

 FOR BRACKET WITH STRAP AND HARDWARE, ADD SUFFIX "SH" TO CATALOG. (EXAMPLE: FLH30-1-3613-C1-SH)
 TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH30-1-3613-C1-SC)

TRIPLE PHASE 0° CUTOUT & ARRESTOR BRACKETS
SPECIFICATIONS
BASE: DUCTILE IRON, 654512

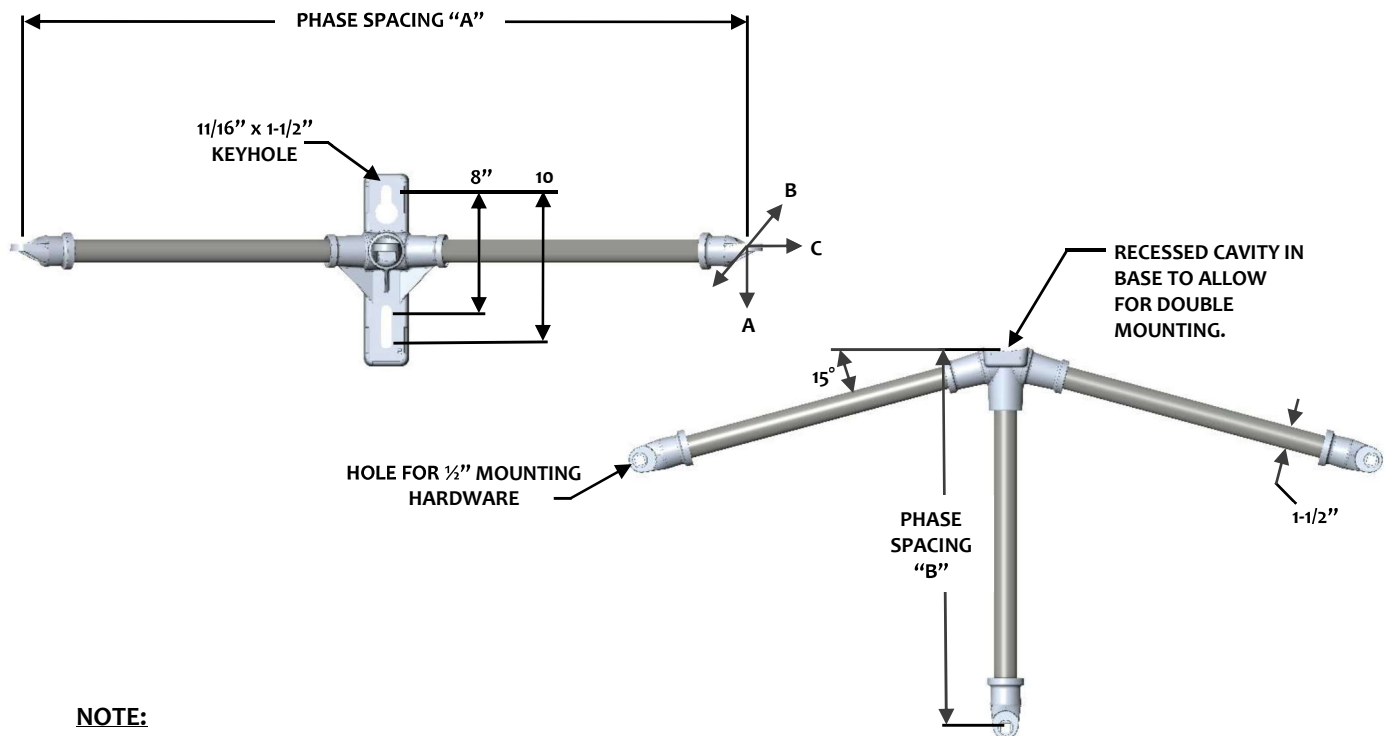
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	PHASE SPACING "B" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
			VERTICAL A	LONG B	TRANS. C
FLH3F-1-3613-C1	36	13	1200	900	1500
FLH3F-1-3618-C1	36	18	1200	900	1500
FLH3F-1-4813-C1	48	13	900	700	1500
FLH3F-1-4818-C1	48	18	900	700	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED


NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

FOR BRACKET WITH (1) 1/2" CAPTIVE CARRIAGE BOLT, SHAKEPROOF WASHER, LOCK WASHER AND HEX NUT, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH3F-1-3613-C1-H)

FOR BRACKET WITH STRAP, ADD SUFFIX "S" TO CATALOG. (EXAMPLE: FLH3F-1-3613-C1-S)

 FOR BRACKET WITH STRAP AND HARDWARE, ADD SUFFIX "SH" TO CATALOG. (EXAMPLE: FLH3F-1-3613-C1-SH)
 TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH3F-1-3613-C1-SC)

TRIPLE PHASE 15° CUTOUT & ARRESTOR BRACKETS
SPECIFICATIONS
BASE: ALUMINUM, 356-T6

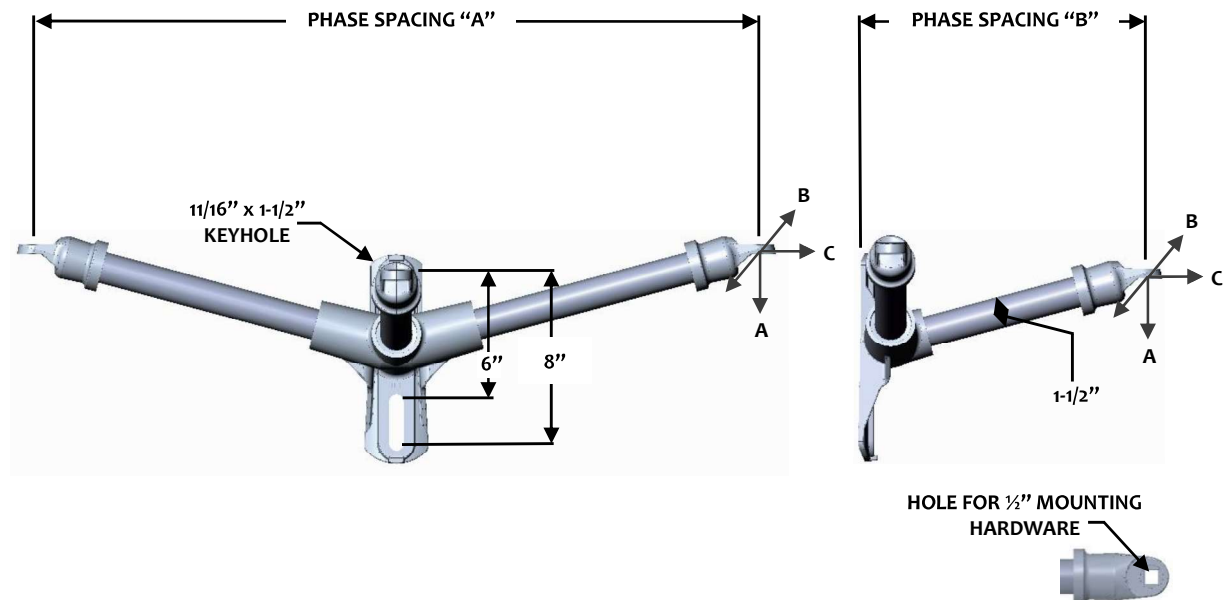
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	PHASE SPACING "B" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
			VERTICAL A	LONG B	TRANS. C
FLH3R-1-3613-C1	36	13	1200	900	1500
FLH3R-1-3618-C1	36	18	1200	900	1500
FLH3R-1-4813-C1	48	13	900	700	1500
FLH3R-1-4818-C1	48	18	900	700	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED


NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

FOR BRACKET WITH (1) 1/2" CAPTIVE CARRIAGE BOLT, SHAKEPROOF WASHER, LOCK WASHER AND HEX NUT, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH3R-1-3613-C1-H)

FOR BRACKET WITH STRAP, ADD SUFFIX "S" TO CATALOG. (EXAMPLE: FLH3R-1-3613-C1-S)

 FOR BRACKET WITH STRAP AND HARDWARE, ADD SUFFIX "SH" TO CATALOG. (EXAMPLE: FLH3R-1-3613-C1-SH)
 TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH3R-1-3613-C1-SC)

TRIPLE PHASE 0° CUTOUT & ARRESTOR BRACKETS
SPECIFICATIONS
BASE: ALUMINUM, 356-T6

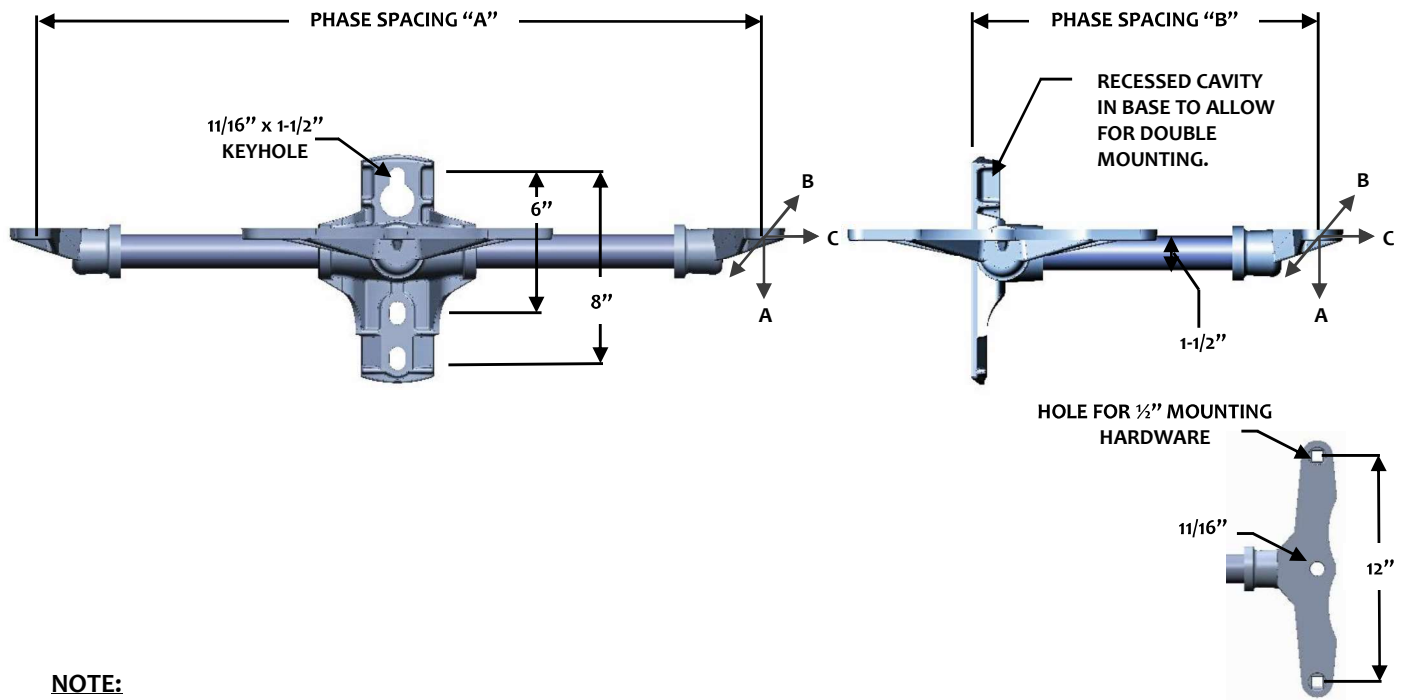
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	PHASE SPACING "B" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
			VERTICAL A	LONG B	TRANS. C
FLH30-1-3613-C2	36	13	1200	900	10,000
FLH30-1-3618-C2	36	18	1200	900	10,000
FLH30-1-4813-C2	48	13	900	700	10,000
FLH30-1-4818-C2	48	18	900	700	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED


NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH30-1-3613-C2-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH30-1-3613-C2-SC)

TRIPLE PHASE 0° CUTOUT & ARRESTOR BRACKETS
SPECIFICATIONS
BASE: DUCTILE IRON, 654512

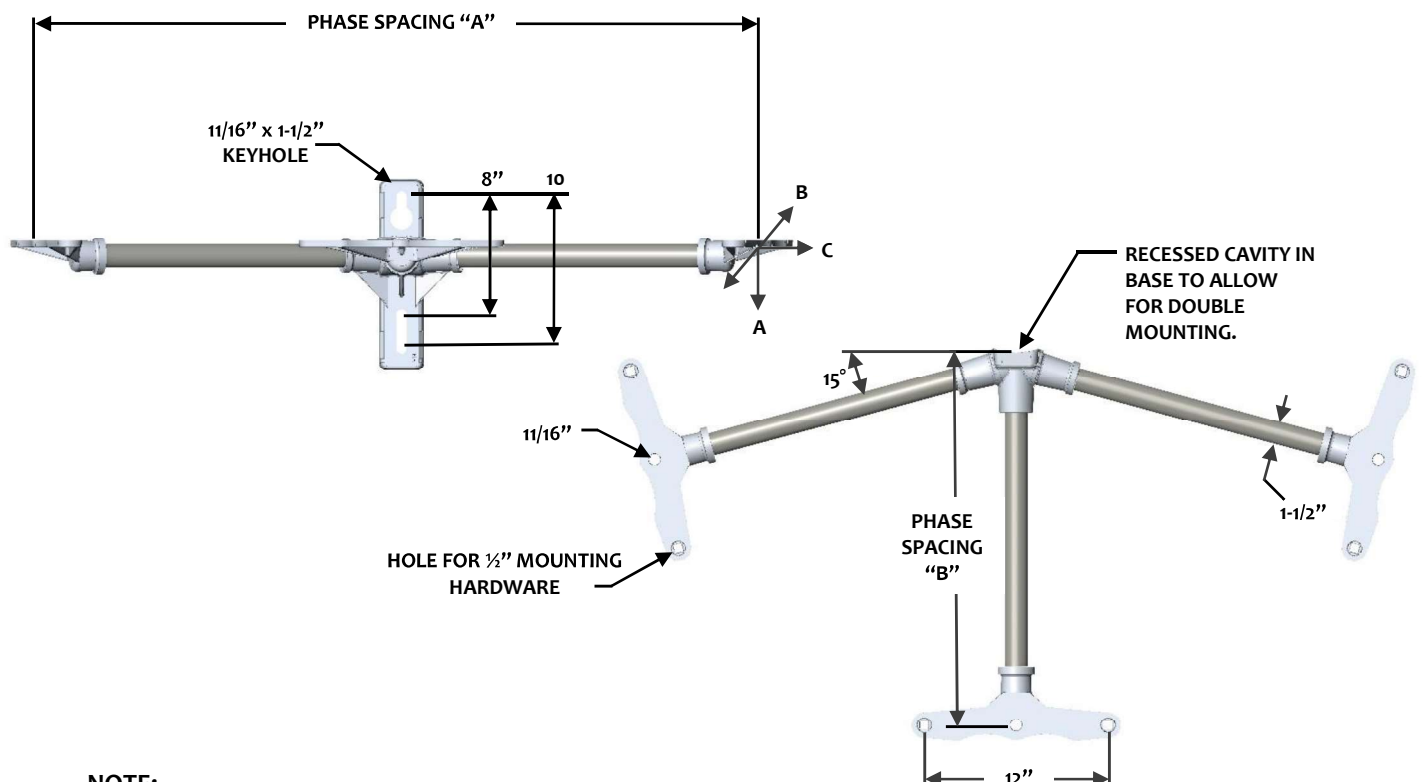
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	PHASE SPACING "B" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
			VERTICAL A	LONG B	TRANS. C
FLH3F-1-3613-C2	36	13	1200	900	1500
FLH3F-1-3618-C2	36	18	1200	900	1500
FLH3F-1-4813-C2	48	13	900	700	1500
FLH3F-1-4818-C2	48	18	900	700	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED


NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLT, SHAKEPROOF WASHER, LOCK WASHER AND HEX NUT, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH3F-1-3613-C2-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH3F-1-3613-C2-SC)

TRIPLE PHASE 15° CUTOUT & ARRESTOR BRACKETS
SPECIFICATIONS
BASE: ALUMINUM, 356-T6

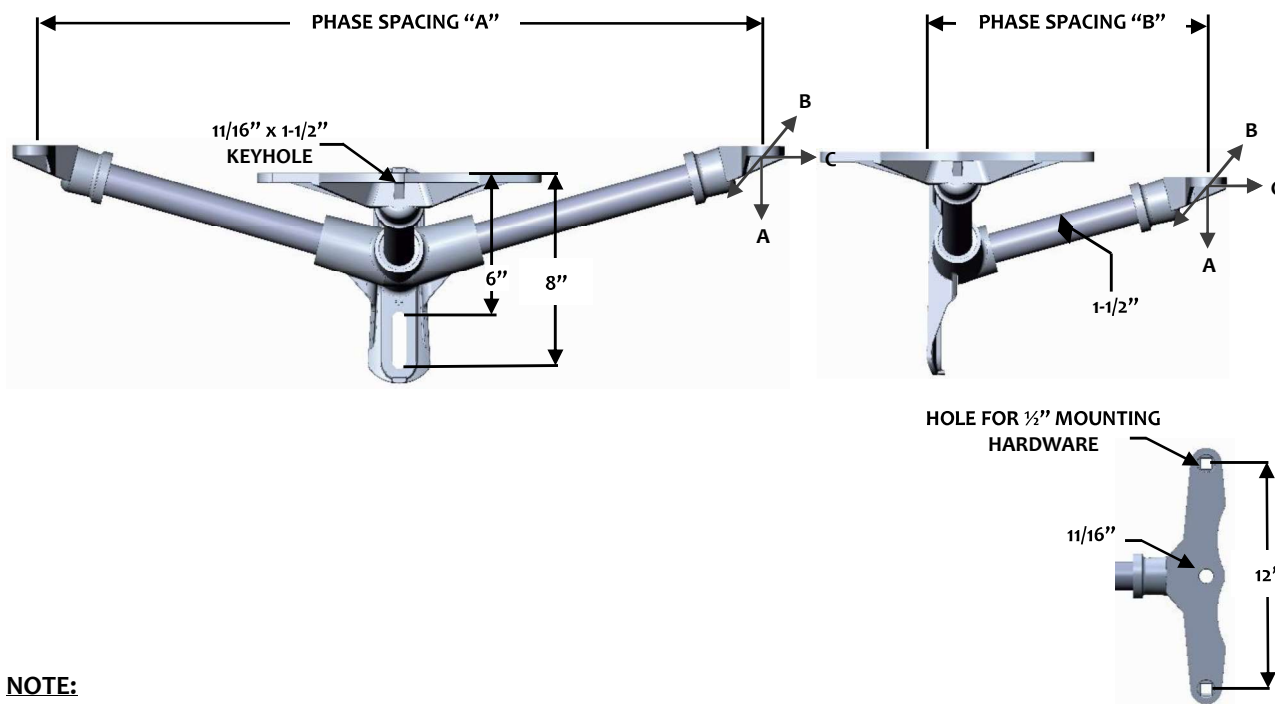
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	PHASE SPACING "B" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
			VERTICAL A	LONG B	TRANS. C
FLH3R-1-3613-C2	36	13	1200	900	10,000
FLH3R-1-3618-C2	36	18	1200	900	10,000
FLH3R-1-4813-C2	48	13	900	700	10,000
FLH3R-1-4818-C2	48	18	900	700	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED


NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH3R-1-3613-C2-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH3R-1-3613-C2-SC)

TRIPLE PHASE 0° CUTOUT & ARRESTOR BRACKETS
SPECIFICATIONS
BASE: ALUMINUM, 356-T6

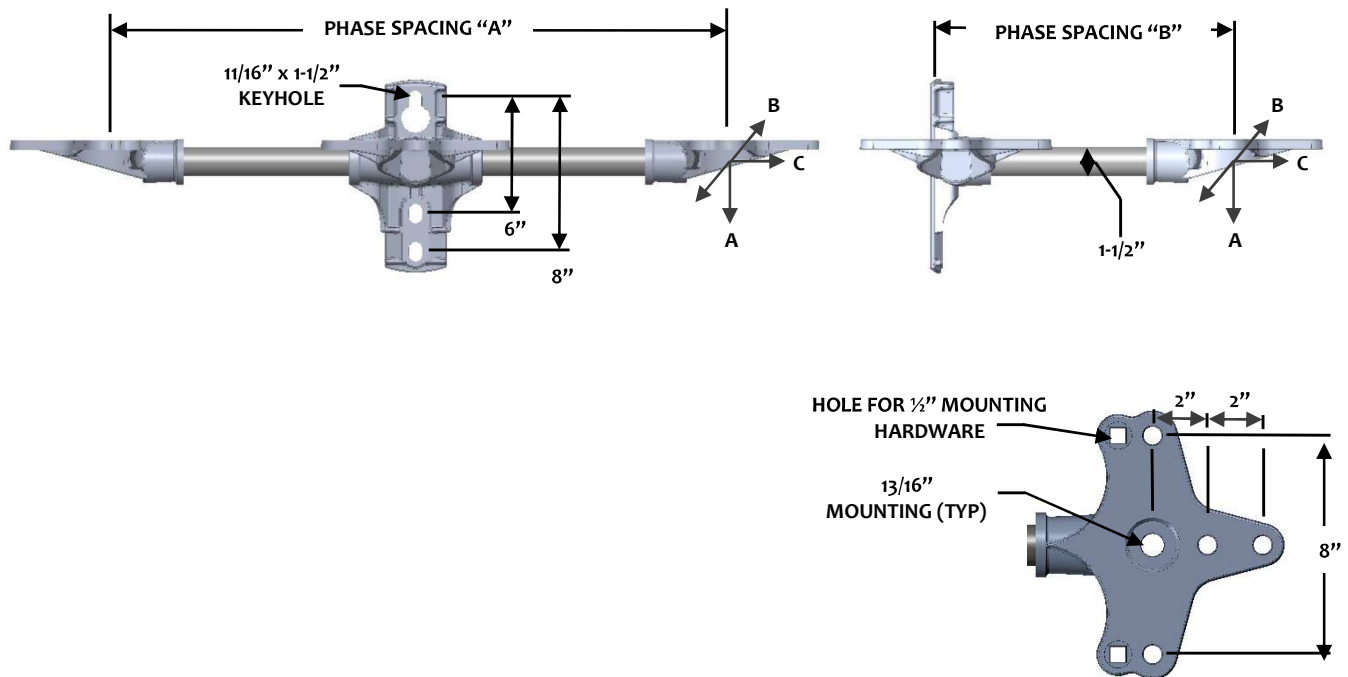
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	PHASE SPACING "B" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
			VERTICAL A	LONG B	TRANS. C
FLH30-1-3613-C3	36	13	1200	900	10,000
FLH30-1-3618-C3	36	18	1200	900	10,000
FLH30-1-4813-C3	48	13	900	700	10,000
FLH30-1-4818-C3	48	18	900	700	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED


NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH30-1-3613-C3-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH30-1-3613-C3-SC)

TRIPLE PHASE 0° CUTOUT & ARRESTOR BRACKETS
SPECIFICATIONS
BASE: DUCTILE IRON, 654512

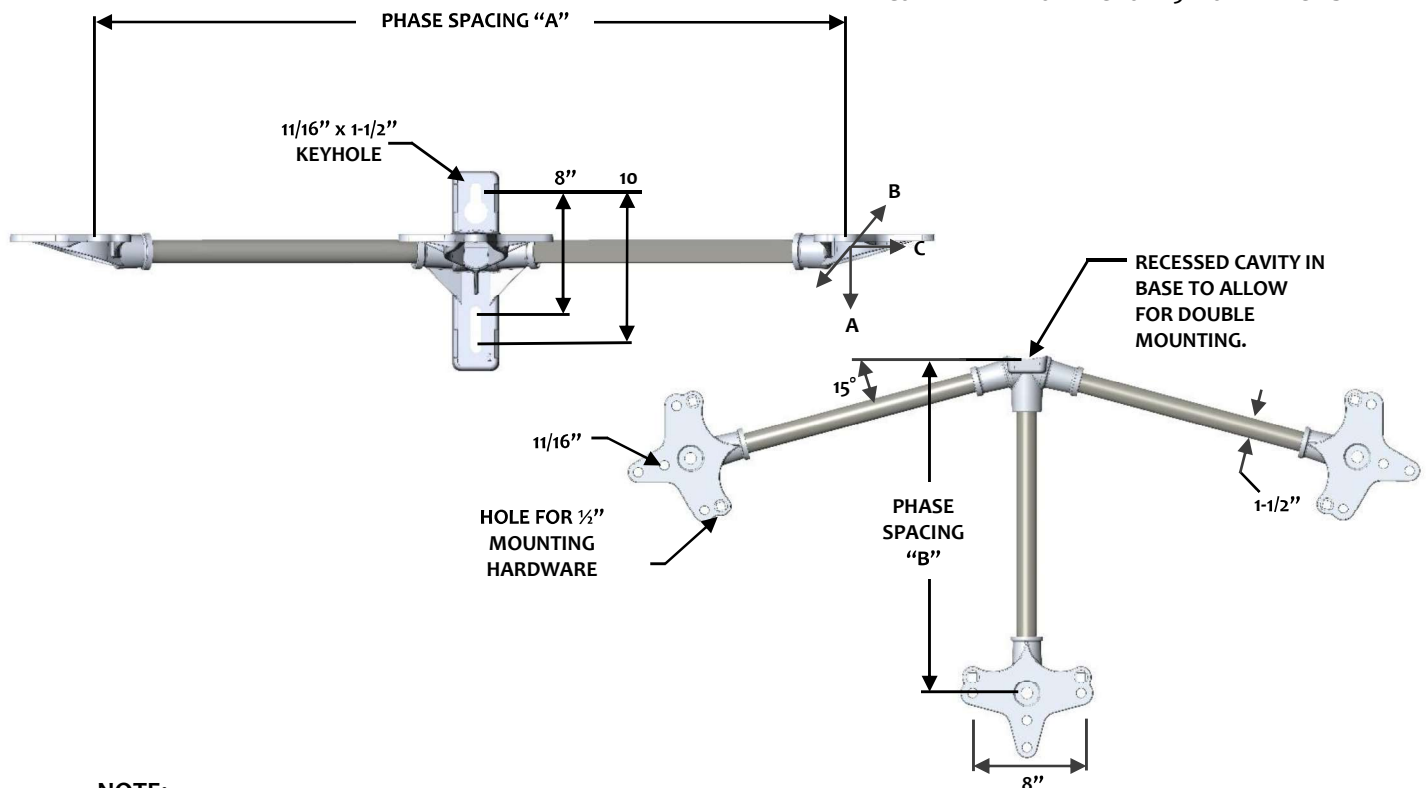
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	PHASE SPACING "B" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
			VERTICAL A	LONG B	TRANS. C
FLH3F-1-3613-C3	36	13	1200	900	1500
FLH3F-1-3618-C3	36	18	1200	900	1500
FLH3F-1-4813-C3	48	13	900	700	1500
FLH3F-1-4818-C3	48	18	900	700	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED


NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLT, SHAKEPROOF WASHER, LOCK WASHER AND HEX NUT, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH3F-1-3613-C3-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH3F-1-3613-C3-SC)

TRIPLE PHASE 15° CUTOUT & ARRESTOR BRACKETS

SPECIFICATIONS

BASE: ALUMINUM, 356-T6

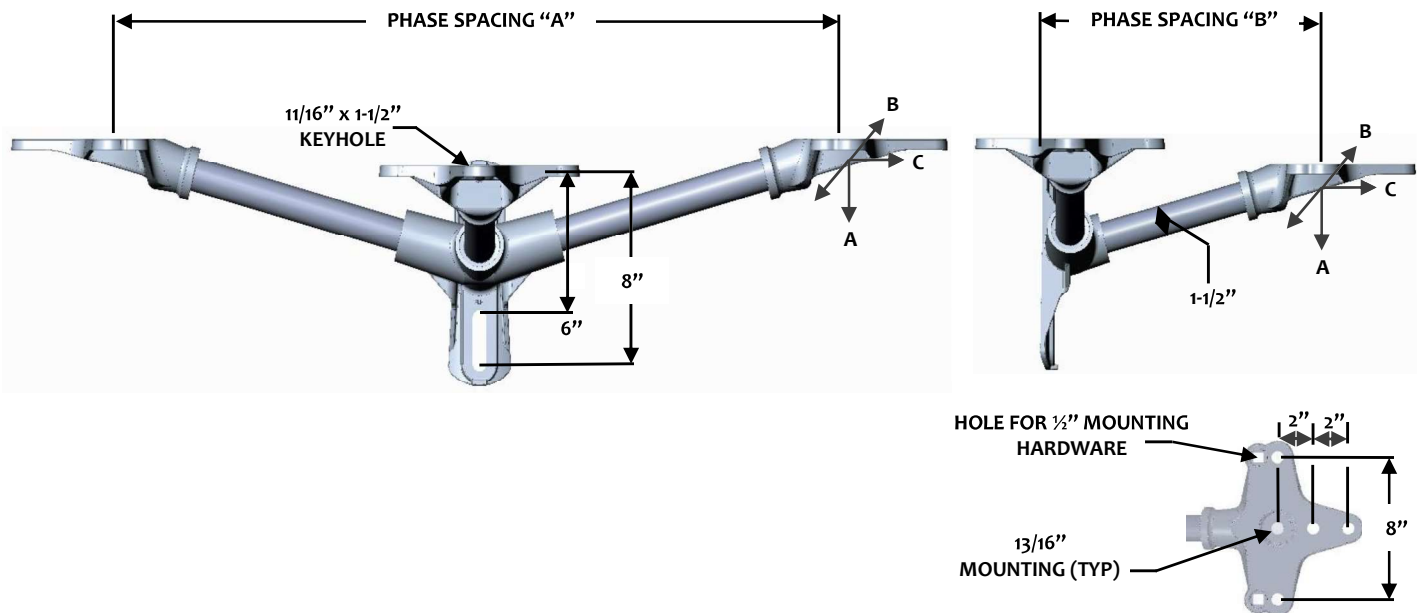
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	PHASE SPACING "B" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
			VERTICAL A	LONG B	TRANS. C
FLH3R-1-3613-C3	36	13	1200	900	10,000
FLH3R-1-3618-C3	36	18	1200	900	10,000
FLH3R-1-4813-C3	48	13	900	700	10,000
FLH3R-1-4818-C3	48	18	900	700	10,000
FLH3R-1-4824-C3	48	24	900	700	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED



NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

FOR BRACKET WITH (2) 1/2" CAPTIVE CARRIAGE BOLTS, SHAKEPROOF WASHERS, LOCK WASHERS AND HEX NUTS, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH3R-1-3613-C3-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH3R-1-3613-C3-SC)

TRIPLE PHASE 15° CUTOUT & ARRESTOR BRACKETS
SPECIFICATIONS
BASE: ALUMINUM, 356-T6


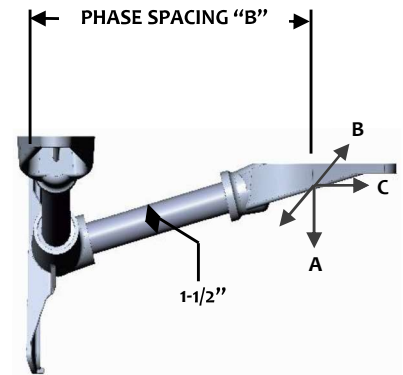
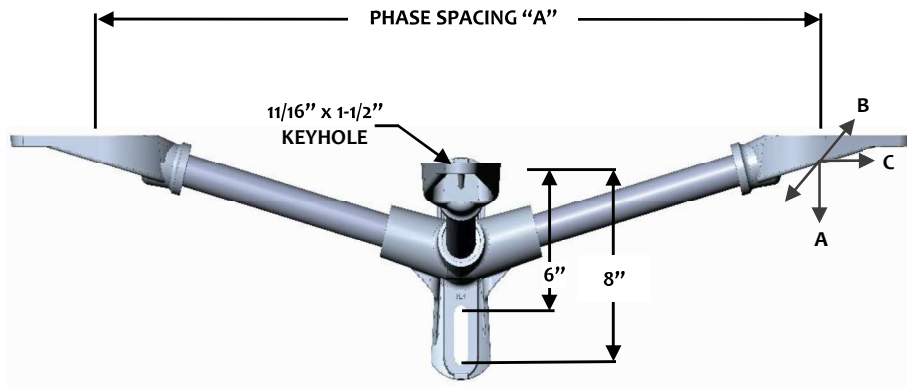
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	PHASE SPACING "B" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
			VERTICAL A	LONG B	TRANS. C
FLH3R-1-3613-C4	36	13	1200	900	10,000
FLH3R-1-3618-C4	36	18	1200	900	10,000
FLH3R-1-4813-C4	48	13	900	700	10,000
FLH3R-1-4818-C4	48	18	900	700	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED


NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

FOR BRACKET WITH (1) 1/2" CAPTIVE CARRIAGE BOLT, SHAKEPROOF WASHER, LOCK WASHER AND HEX NUT, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH3R-1-3613-C4-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH3R-1-3613-C4-SC)

TRIPLE PHASE 15° CUTOUT & ARRESTOR BRACKETS
SPECIFICATIONS
BASE: ALUMINUM, 356-T6

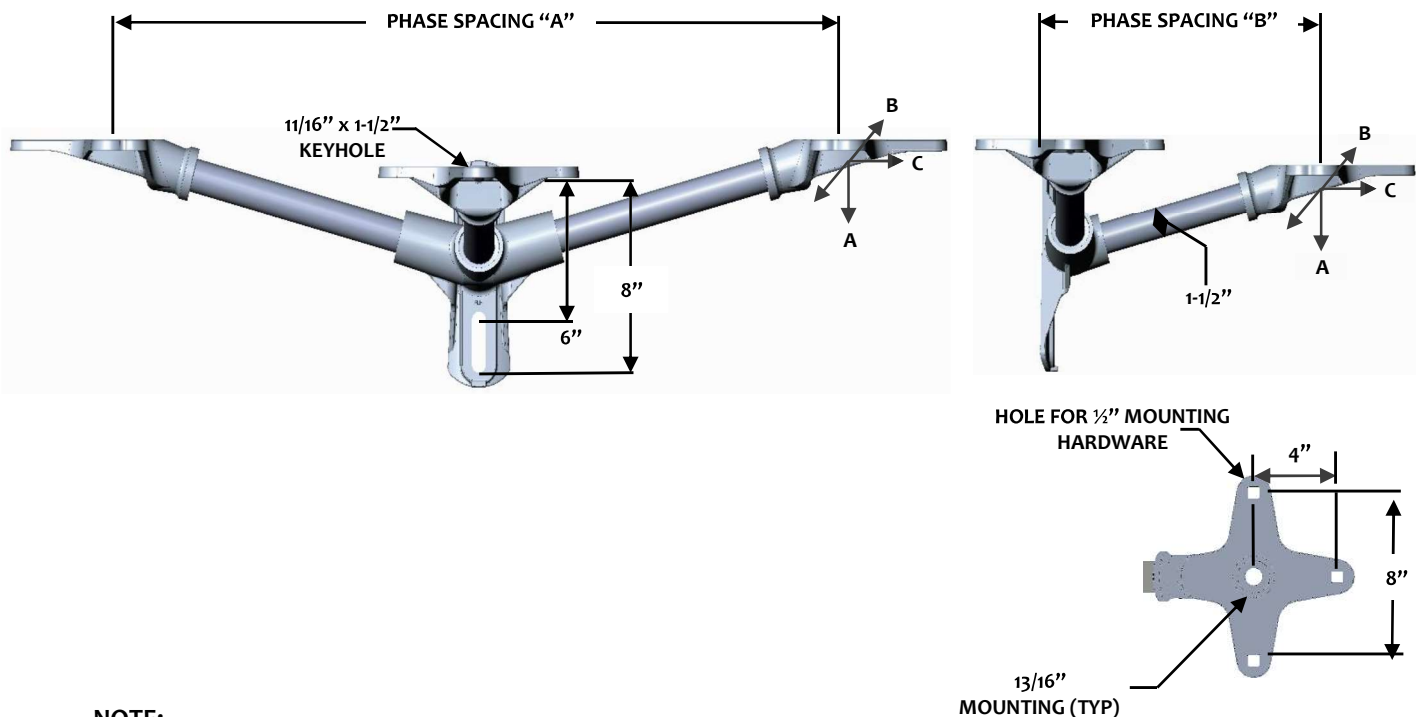
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	PHASE SPACING "B" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
			VERTICAL A	LONG B	TRANS. C
FLH3R-1-3613-C5	36	13	1200	900	10,000
FLH3R-1-3618-C5	36	18	1200	900	10,000
FLH3R-1-4813-C5	48	13	900	700	10,000
FLH3R-1-4818-C5	48	18	900	700	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED


NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

FOR BRACKET WITH (1) 1/2" CAPTIVE CARRIAGE BOLT, SHAKEPROOF WASHER, LOCK WASHER AND HEX NUT, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH3R-1-3613-C5-H)

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH3R-1-3613-C5-SC)