




FIBER OPTIC
BRACKETS

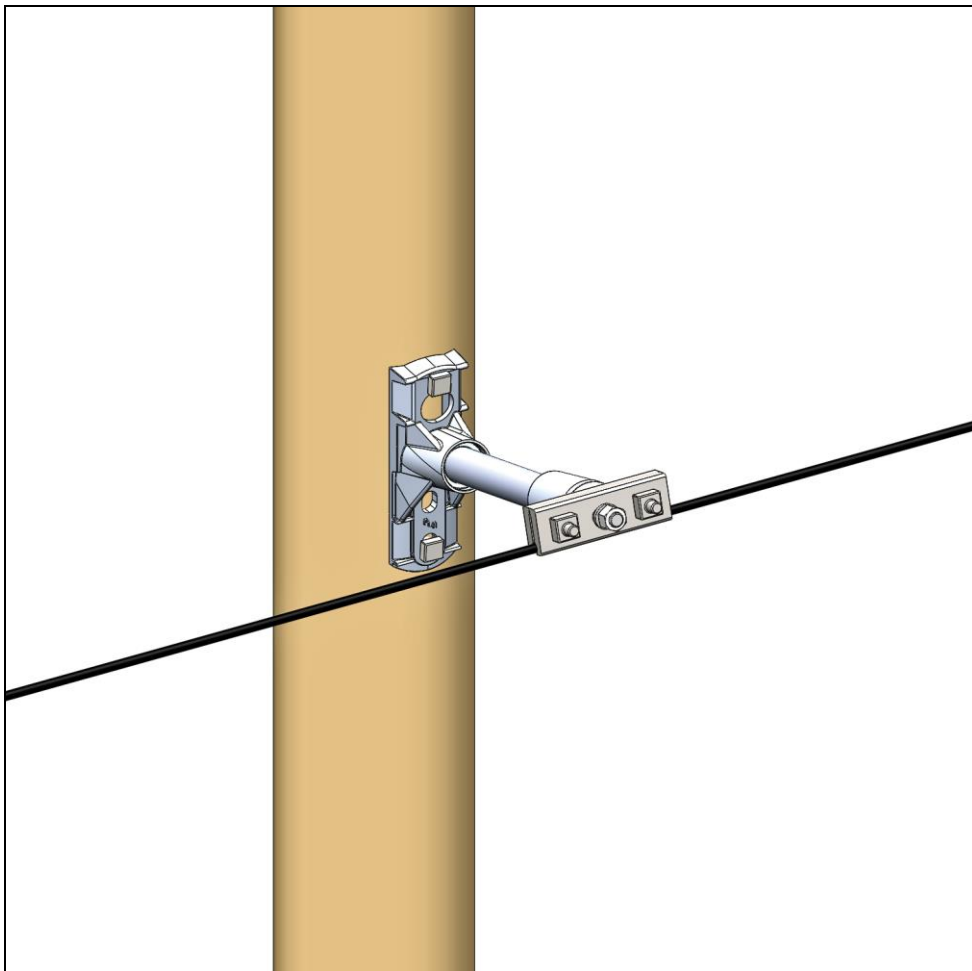

BUILD-A-BRACKET SINGLE PHASE FIBER OPTIC BRACKETS

BUILD-A-BRACKET SYSTEM
NUMBERING KEY

FLH 0 – 1 – 12 FO

FLH PREFIX

RISE

OFFERINGS

0 = ZERO DEGREE

R = FIFTEEN DEGREE

JB = JUMPER BASE

FITTING OPTION

FO= FIBER OPTICS

ROD DIAMETER

OFFERINGS

1 = 1-1/2" DIA

LENGTH


OFFERINGS

12 = 12"

15 = 15"


18 = 18"

24 = 24"

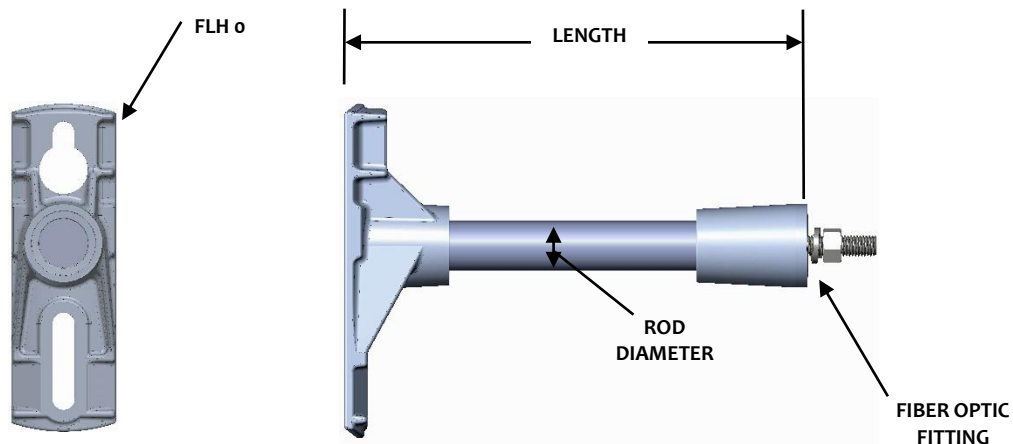


BUILD-A-BRACKET SINGLE PHASE FIBER OPTIC BRACKETS

BASE/FITTING OPTIONS




FLH-0

KEYHOLE MOUNTING
1-1/2" DIAMETER
0° BASE



FLH-R

KEYHOLE MOUNTING
1-1/2" DIAMETER
15° BASE



FLHJB

1-1/2" DIAMETER
15° JUMPER BASE



FO

FIBER OPTIC
CAP W/ BOLT


SINGLE PHASE 0° FIBER OPTIC BRACKET

SPECIFICATIONS

BASE: ALUMINUM, 356-T6
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.
FITTING: ALUMINUM, 356-T6
HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLH0-1-12FO	12	1800	900	1500
FLH0-1-15FO	15	1500	700	1500
FLH0-1-18FO	18	1200	600	1500
FLH0-1-24FO	24	900	500	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

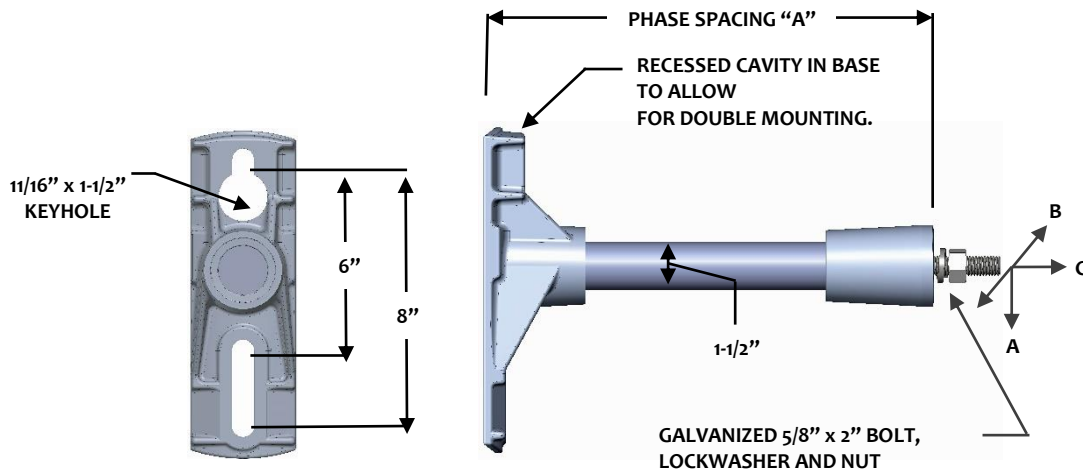

NOTE:

FOR OTHER LENGTHS OR ADDITIONAL HARDWARE PLEASE CONTACT US.
 BRACKETS COMES WITH (1) 5/8" x 2" LG. BOLTS, HEX NUTS. (FOR SPECIAL LENGTHS CONTACT VENDOR)

SINGLE PHASE 15° FIBER OPTIC BRACKET

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHR-1-12FO	12	1800	1300	1500
FLHR-1-15FO	15	1500	1200	1500
FLHR-1-18FO	18	1200	900	1500
FLHR-1-24FO	24	900	700	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

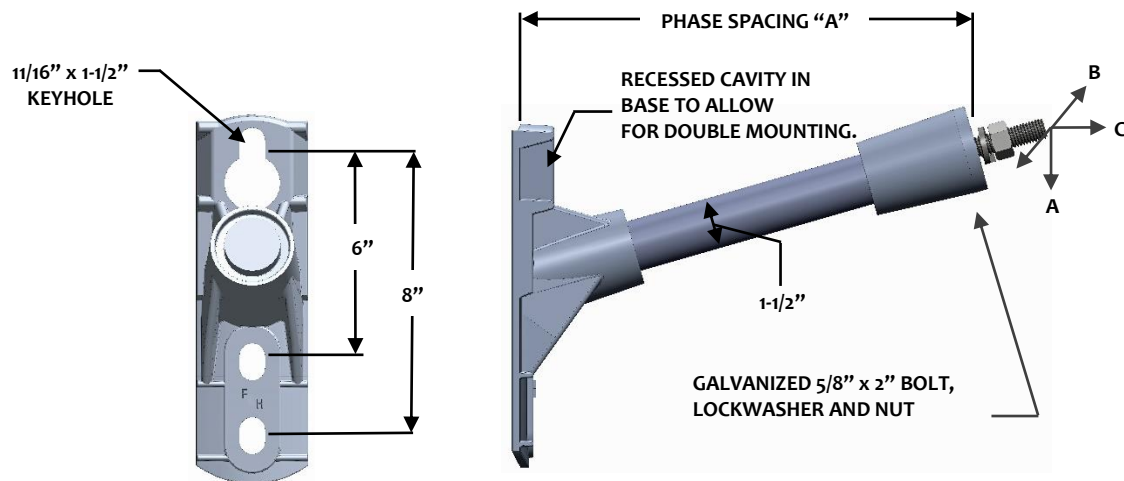

NOTE:

FOR OTHER LENGTHS OR ADDITIONAL HARDWARE PLEASE CONTACT US.

BRACKETS COMES WITH (1) 5/8" x 2" LG. BOLTS, HEX NUTS. (FOR SPECIAL LENGTHS CONTACT VENDOR)

15° JUMPER BRACKETS

SPECIFICATIONS

BASE: ALUMINUM, 356-T6



ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHJB-1-12-FO	12	1000	800	1500
FLHJB-1-15-FO	15	850	650	1500
FLHJB-1-18-FO	18	700	500	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

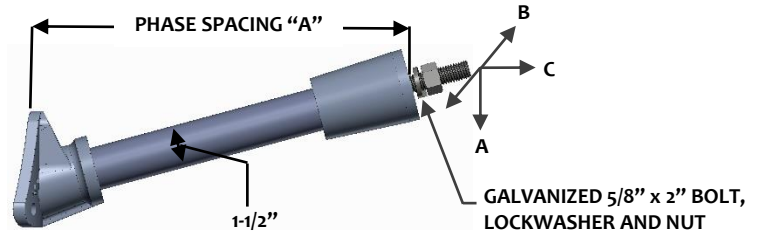

NOTE:

BASE EXCEPTS 5/8" MOUNTING HARDWARE AND 3/8" LAG BOLTS.