



GUYSTRAINS



GUYSTRAINS

**GUYSTRAIN SYSTEM
NUMBERING KEY**

FCC 16 – 18 R

GS PREFIX

OFFERINGS

FCC = CLEVIS / CLEVIS
FCTE = CLEVIS / THIMBLE EYE
FTETE = THIMBLE EYE / THIMBLE EYE
FYCC = Y-CLEVIS / CLEVIS (21K ONLY)
FYCTE = Y-CLEVIS / THIMBLE EYE (21K ONLY)
FYCYC = Y-CLEVIS / Y-CLEVIS (21K ONLY)

RATING

OFFERINGS

16 = 16,000 TENSILE (LB)
21 = 21,000 TENSILE (LB)
30 = 30,000 TENSILE (LB)
36 = 36,000 TENSILE (LB)

ACCESSORIES


OFFERINGS (CLEVIS ONLY)

R = ROLLER
R2 = ROLLERS (2)

LENGTH

OFFERINGS

12 = 12"	54 = 54"
18 = 18"	60 = 60"
24 = 24"	78 = 78"
30 = 30"	96 = 96"
36 = 36"	120 = 120"
42 = 42"	144 = 144"

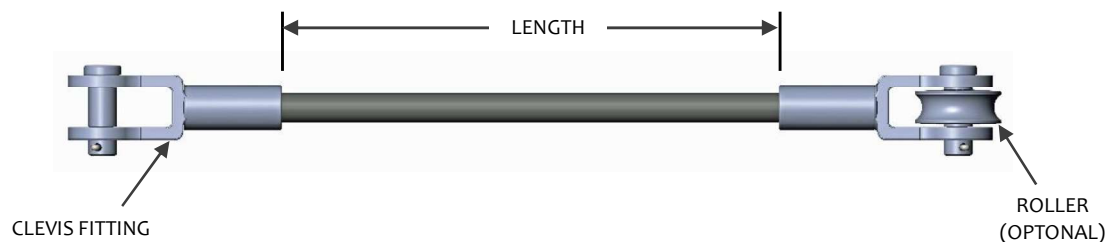


GUYSTRAINS


OPTIONS




FCC
CLEVIS
FITTING

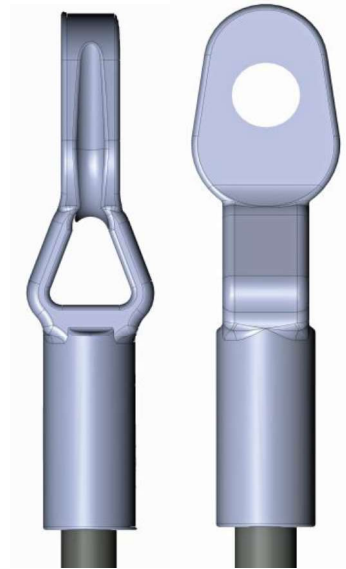

FTE
THIMBLE-EYE
FITTING

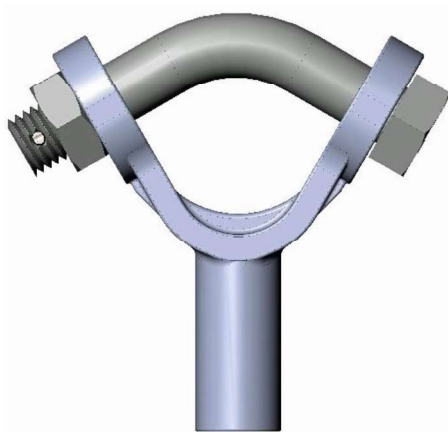

FYC
Y-CLEVIS
FITTING



R
CLEVIS
ROLLER

16K GUYSTRAINS – CLEVIS / CLEVIS

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	LENGTH "A" INCHES	LENGTH "B" INCHES
FCC16-12	12	20
FCC16-18	18	26
FCC16-24	24	32
FCC16-30	30	38
FCC16-36	36	44
FCC16-42	42	50
FCC16-54	54	62
FCC16-60	60	68
FCC16-78	78	86
FCC16-96	96	104
FCC16-120	120	128
FCC16-144	144	152

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

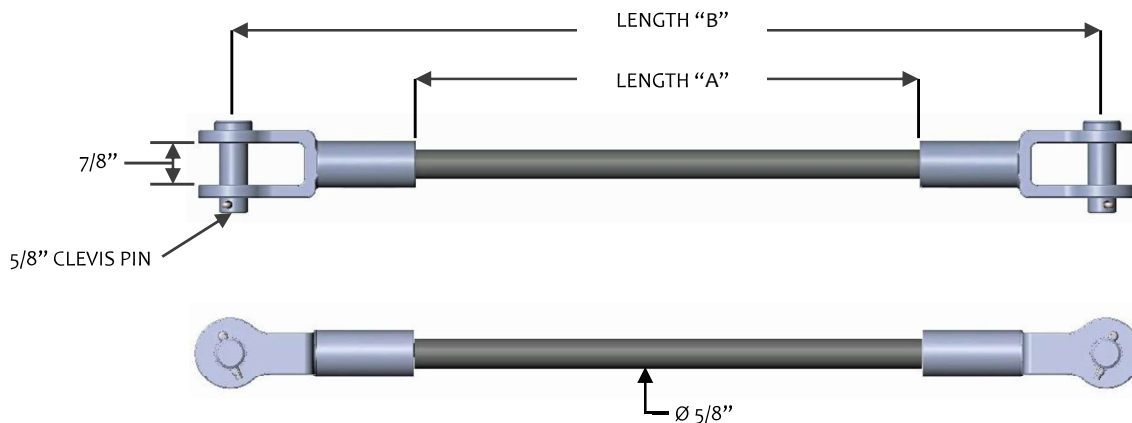

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

ADD SUFFIX "R" FOR (1) ROLLER (Example: FCC16-18R).

ADD SUFFIX "R2" FOR (2) ROLLERS (Example: FCC16-24R2).

16K GUYSTRAINS – CLEVIS / THIMBLE-EYE

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER		
STANDARD COATING	LENGTH "A" INCHES	LENGTH "B" INCHES
FCTE16-12	12	20-1/2
FCTE16-18	18	26-1/2
FCTE16-24	24	32-1/2
FCTE16-30	30	38-1/2
FCTE16-36	36	44-1/2
FCTE16-42	42	50-1/2
FCTE16-54	54	62-1/2
FCTE16-60	60	68-1/2
FCTE16-78	78	86-1/2
FCTE16-96	96	104-1/2
FCTE16-120	120	128-1/2
FCTE16-144	144	152-1/2

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

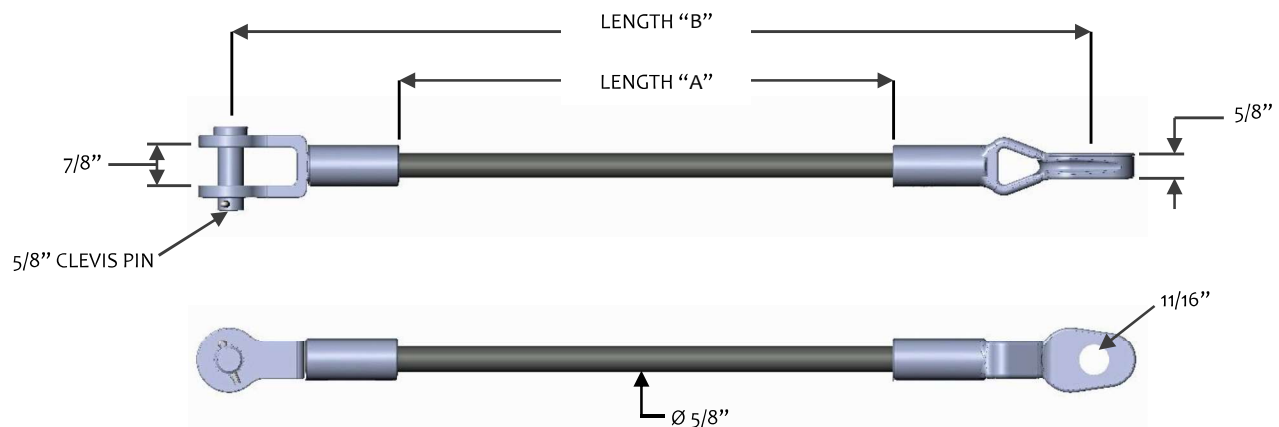

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

ADD SUFFIX "R" FOR (1) ROLLER (Example: FCTE16-18R).

16K GUYSTRAINS – THIMBLE-EYE / THIMBLE-EYE


SPECIFICATIONS

FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

CATALOG NUMBER		
STANDARD COATING	LENGTH "A" INCHES	LENGTH "B" INCHES
FTETE16-12	12	21
FTETE16-18	18	27
FTETE16-24	24	33
FTETE16-30	30	39
FTETE16-36	36	45
FTETE16-42	42	51
FTETE16-54	54	63
FTETE16-60	60	69
FTETE16-78	78	87
FTETE16-96	96	105
FTETE16-120	120	129
FTETE16-144	144	153

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

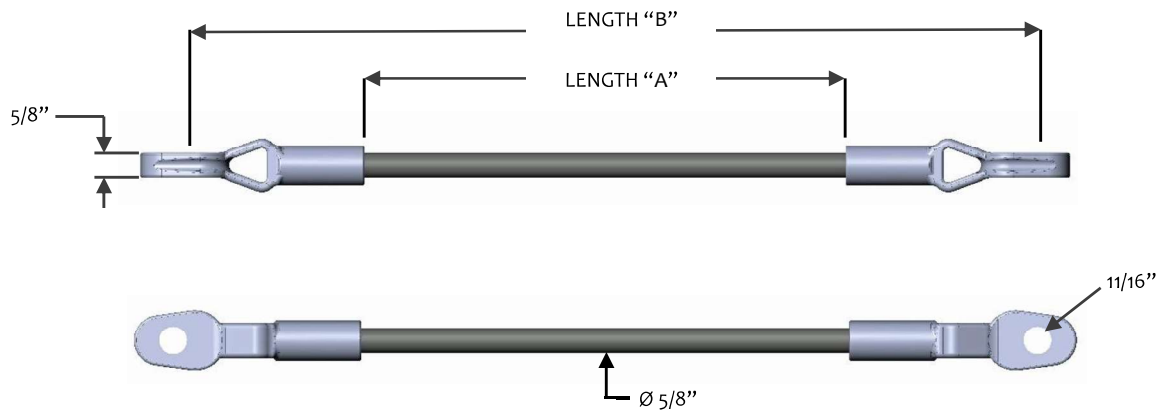

NOTE:
FOR OTHER LENGTHS PLEASE CONTACT US.