

21K GUYSTRAINS – CLEVIS / CLEVIS

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	LENGTH "A" INCHES	LENGTH "B" INCHES
FCC21-12	12	20
FCC21-18	18	26
FCC21-24	24	32
FCC21-30	30	38
FCC21-36	36	44
FCC21-42	42	50
FCC21-54	54	62
FCC21-60	60	68
FCC21-78	78	86
FCC21-96	96	104
FCC21-120	120	128
FCC21-144	144	152

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

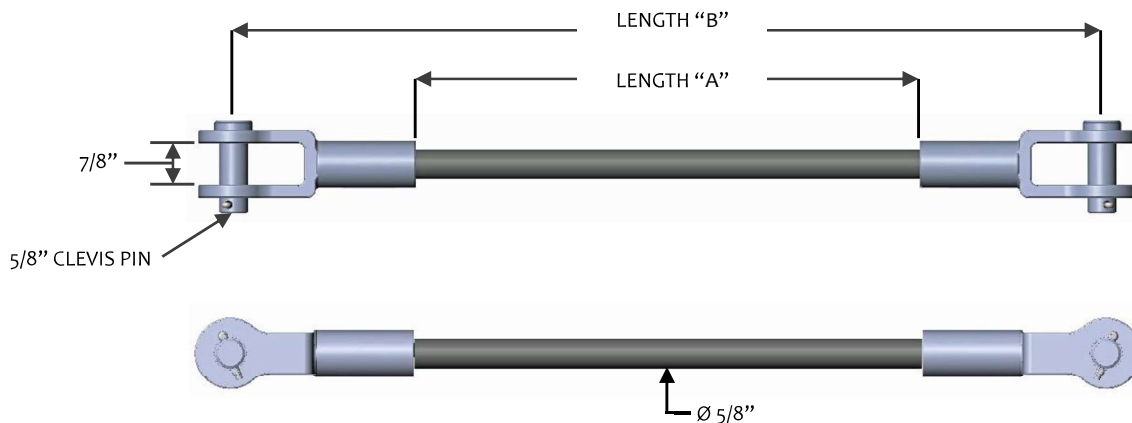

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

ADD SUFFIX "R" FOR (1) ROLLER (Example: FCC21-18R).

ADD SUFFIX "R2" FOR (2) ROLLERS (Example: FCC21-24R2).

21K GUYSTRAINS – CLEVIS / THIMBLE-EYE

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	LENGTH "A" INCHES	LENGTH "B" INCHES
FCTE21-12	12	20-1/2
FCTE21-18	18	26-1/2
FCTE21-24	24	32-1/2
FCTE21-30	30	38-1/2
FCTE21-36	36	44-1/2
FCTE21-42	42	50-1/2
FCTE21-54	54	62-1/2
FCTE21-60	60	68-1/2
FCTE21-78	78	86-1/2
FCTE21-96	96	104-1/2
FCTE21-120	120	128-1/2
FCTE21-144	144	152-1/2

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

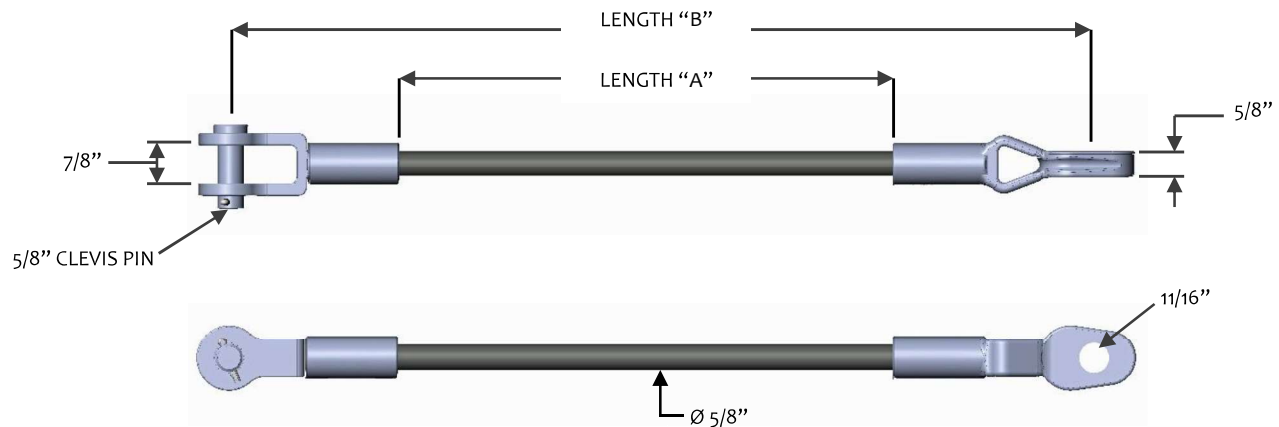

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

ADD SUFFIX "R" FOR (1) ROLLER (Example: FCTE21-18R).

21K GUYSTRAINS – THIMBLE-EYE / THIMBLE-EYE


SPECIFICATIONS

FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

CATALOG NUMBER		
STANDARD COATING	LENGTH "A" INCHES	LENGTH "B" INCHES
FTETE21-12	12	21
FTETE21-18	18	27
FTETE21-24	24	33
FTETE21-30	30	39
FTETE21-36	36	45
FTETE21-42	42	51
FTETE21-54	54	63
FTETE21-60	60	69
FTETE21-78	78	87
FTETE21-96	96	105
FTETE21-120	120	129
FTETE21-144	144	153

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

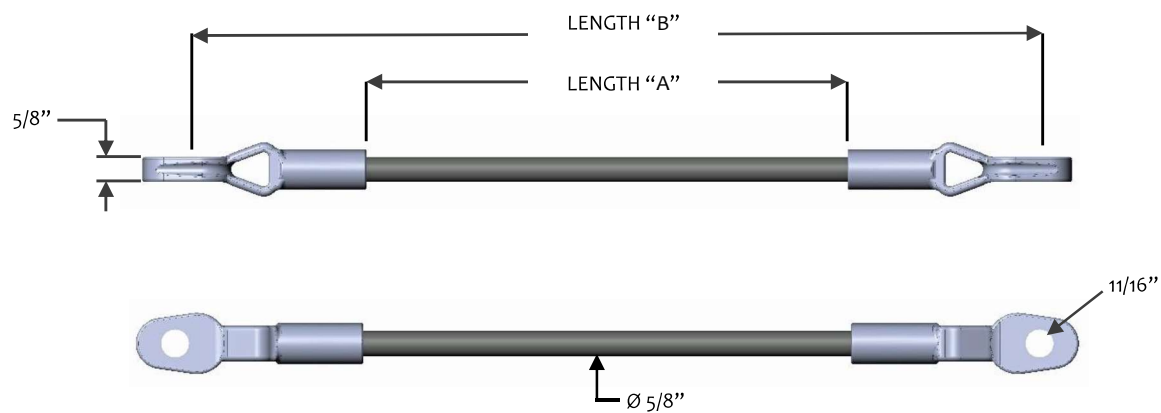

NOTE:
FOR OTHER LENGTHS PLEASE CONTACT US.

21K GUYSTRAINS – Y-CLEVIS / CLEVIS

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	LENGTH “A” INCHES	LENGTH “B” INCHES
FYCC21-12	12	20-1/8
FYCC21-18	18	26-1/8
FYCC21-24	24	32-1/8
FYCC21-30	30	38-1/8
FYCC21-36	36	44-1/8
FYCC21-42	42	50-1/8
FYCC21-54	54	62-1/8
FYCC21-60	60	68-1/8
FYCC21-78	78	86-1/8
FYCC21-96	96	104-1/8
FYCC21-120	120	128-1/8
FYCC21-144	144	152-1/8

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

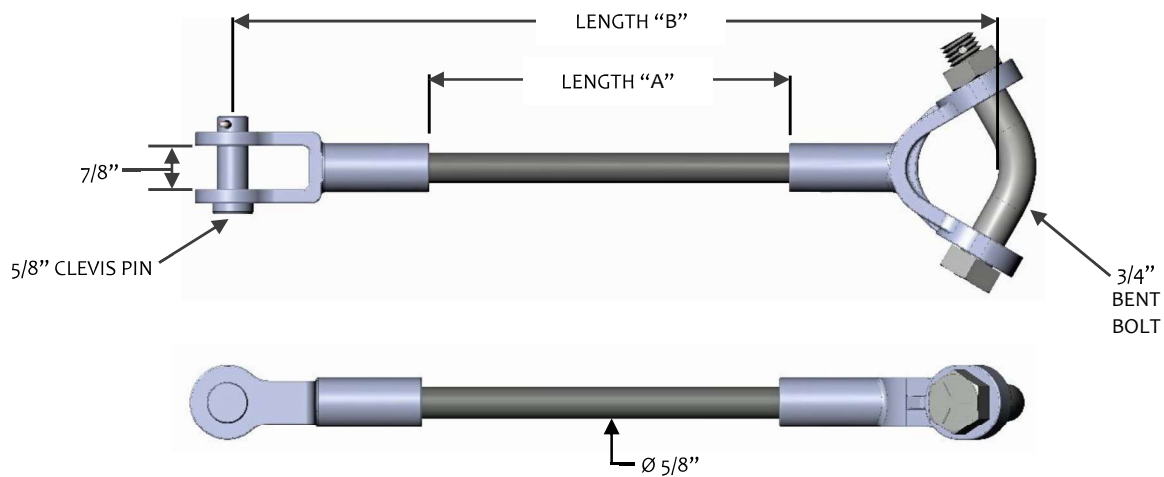

NOTE:
FOR OTHER LENGTHS PLEASE CONTACT US.

21K GUYSTRAINS – Y-CLEVIS / THIMBLE-EYE

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	LENGTH "A" INCHES	LENGTH "B" INCHES
FYCTE21-12	12	20-5/8
FYCTE21-18	18	26-5/8
FYCTE21-24	24	32-5/8
FYCTE21-30	30	38-5/8
FYCTE21-36	36	44-5/8
FYCTE21-42	42	50-5/8
FYCTE21-54	54	62-5/8
FYCTE21-60	60	68-5/8
FYCTE21-78	78	86-5/8
FYCTE21-96	96	104-5/8
FYCTE21-120	120	128-5/8
FYCTE21-144	144	152-5/8

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

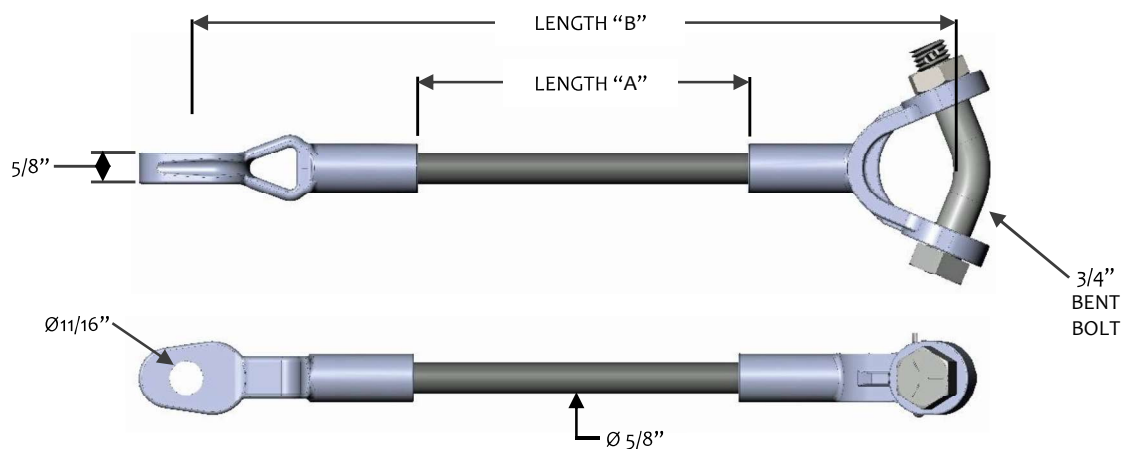

NOTE:
FOR OTHER LENGTHS PLEASE CONTACT US.

21K GUYSTRAINS – Y-CLEVIS / Y-CLEVIS

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	LENGTH "A" INCHES	LENGTH "B" INCHES
FYCYC21-12	12	20-1/4
FYCYC21-18	18	26-1/4
FYCYC21-24	24	32-1/4
FYCYC21-30	30	38-1/4
FYCYC21-36	36	44-1/4
FYCYC21-42	42	50-1/4
FYCYC21-54	54	62-1/4
FYCYC21-60	60	68-1/4
FYCYC21-78	78	86-1/4
FYCYC21-96	96	104-1/4
FYCYC21-120	120	128-1/4
FYCYC21-144	144	152-1/4

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

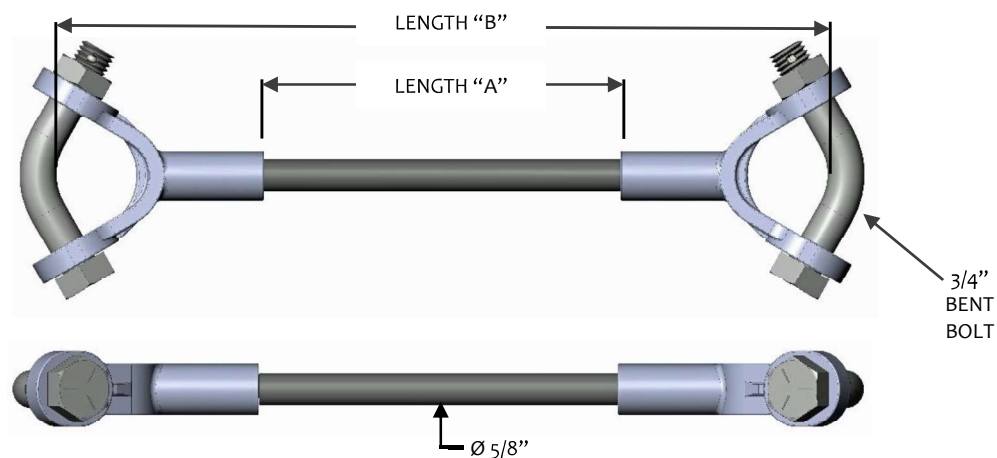

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.