

30K GUYSTRAINS – CLEVIS / CLEVIS

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER		
STANDARD COATING	LENGTH "A" INCHES	LENGTH "B" INCHES
FCC30-12	12	24
FCC30-18	18	30
FCC30-24	24	36
FCC30-30	30	42
FCC30-36	36	48
FCC30-42	42	54
FCC30-54	54	66
FCC30-60	60	72
FCC30-78	78	90
FCC30-96	96	108
FCC30-120	120	132
FCC30-144	144	156

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

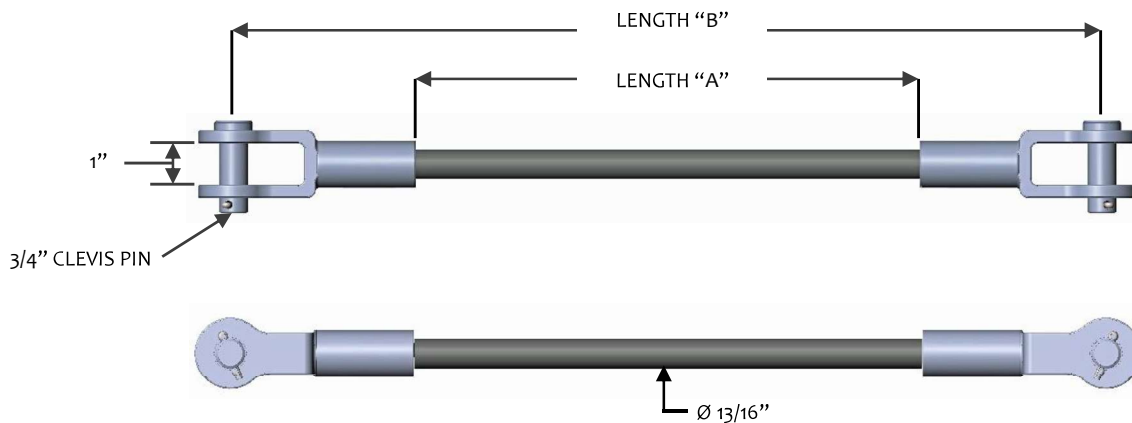

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

ADD SUFFIX "R" FOR (1) ROLLER (Example: FCC30-18R).

ADD SUFFIX "R2" FOR (2) ROLLER (Example: FCC30-24R2).

30K GUYSTRAINS – CLEVIS / THIMBLE-EYE

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER		
STANDARD COATING	LENGTH "A" INCHES	LENGTH "B" INCHES
FCTE30-12	12	24-1/4
FCTE30-18	18	30-1/4
FCTE30-24	24	36-1/4
FCTE30-30	30	42-1/4
FCTE30-36	36	48-1/4
FCTE30-42	42	54-1/4
FCTE30-54	54	66-1/4
FCTE30-60	60	72-1/4
FCTE30-78	78	90-1/4
FCTE30-96	96	108-1/4
FCTE30-120	120	132-1/4
FCTE30-144	144	156-1/4

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

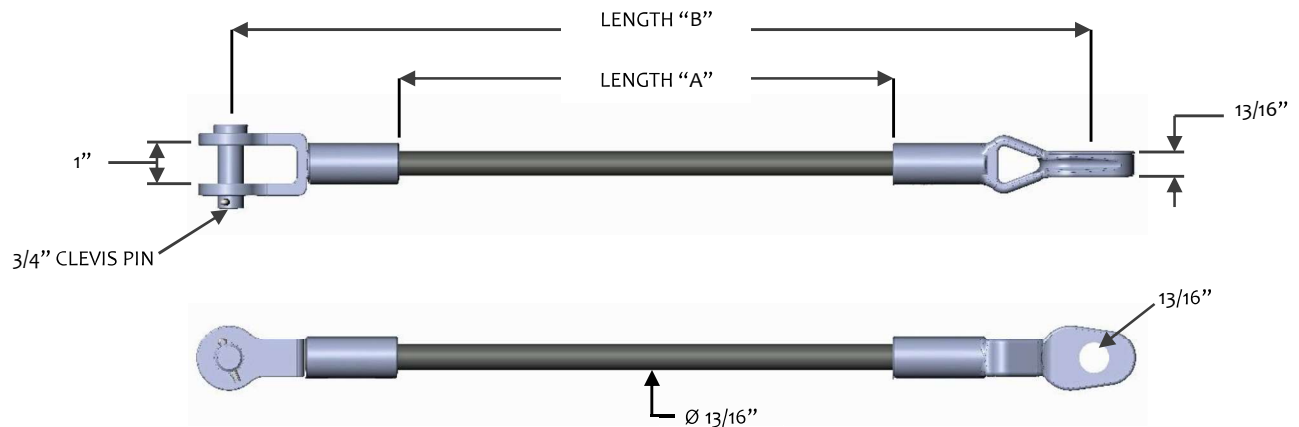

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

ADD SUFFIX "R" FOR (1) ROLLER (Example: FCTE30-18R).

30K GUYSTRAINS – THIMBLE-EYE / THIMBLE-EYE


SPECIFICATIONS

FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

CATALOG NUMBER	LENGTH "A" INCHES	LENGTH "B" INCHES
FTETE30-12	12	24-1/2
FTETE30-18	18	30-1/2
FTETE30-24	24	36-1/2
FTETE30-30	30	42-1/2
FTETE30-36	36	48-1/2
FTETE30-42	42	54-1/2
FTETE30-54	54	66-1/2
FTETE30-60	60	72-1/2
FTETE30-78	78	90-1/2
FTETE30-96	96	108-1/2
FTETE30-120	120	132-1/2
FTETE30-144	144	156-1/2

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

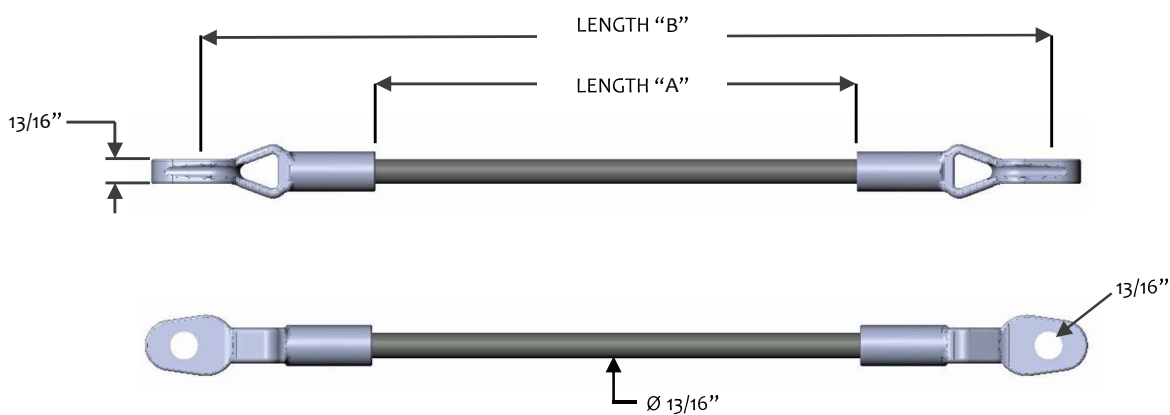

NOTE:
FOR OTHER LENGTHS PLEASE CONTACT US.

30K GUYSTRAINS – Y-CLEVIS / CLEVIS

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER		
STANDARD COATING	LENGTH "A" INCHES	LENGTH "B" INCHES
FYCC30-12	12	24
FYCC30-18	18	30
FYCC30-24	24	36
FYCC30-30	30	42
FYCC30-36	36	48
FYCC30-42	42	54
FYCC30-54	54	66
FYCC30-60	60	72
FYCC30-78	78	90
FYCC30-96	96	108
FYCC30-120	120	132
FYCC30-144	144	156

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

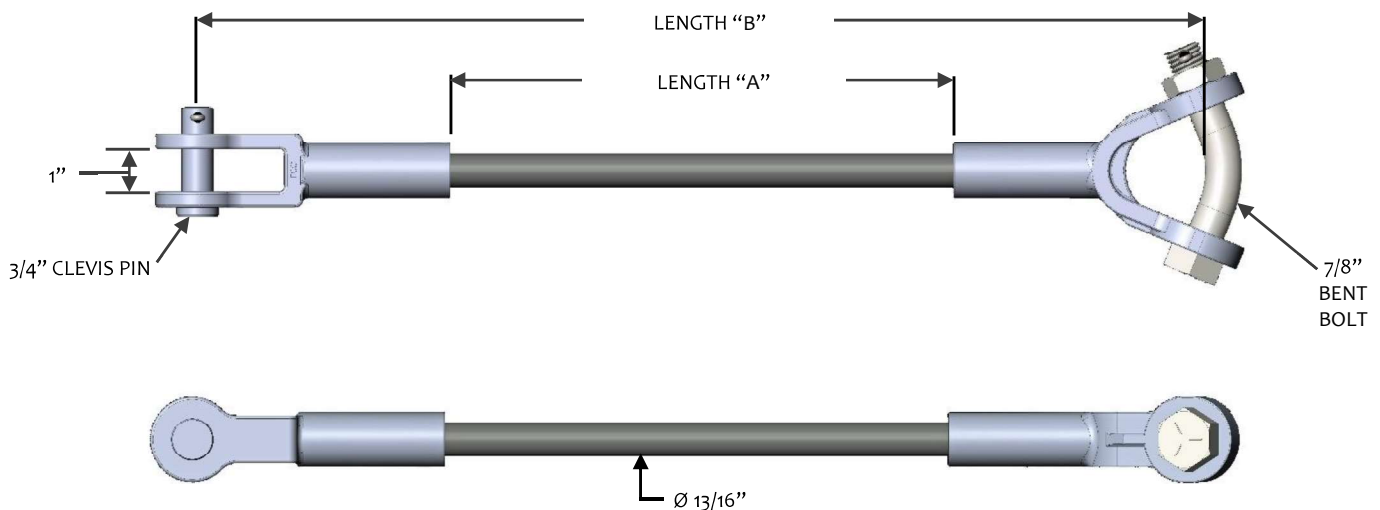

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

30K GUYSTRAINS –Y-CLEVIS / THIMBLE-EYE

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	LENGTH "A" INCHES	LENGTH "B" INCHES
FYCTE30-12	12	24.25
FYCTE30-18	18	30.25
FYCTE30-24	24	36.25
FYCTE30-30	30	42.25
FYCTE30-36	36	48.25
FYCTE30-42	42	54.25
FYCTE30-54	54	66.25
FYCTE30-60	60	72.25
FYCTE30-78	78	90.25
FYCTE30-96	96	108.25
FYCTE30-120	120	132.25
FYCTE30-144	144	156.25

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

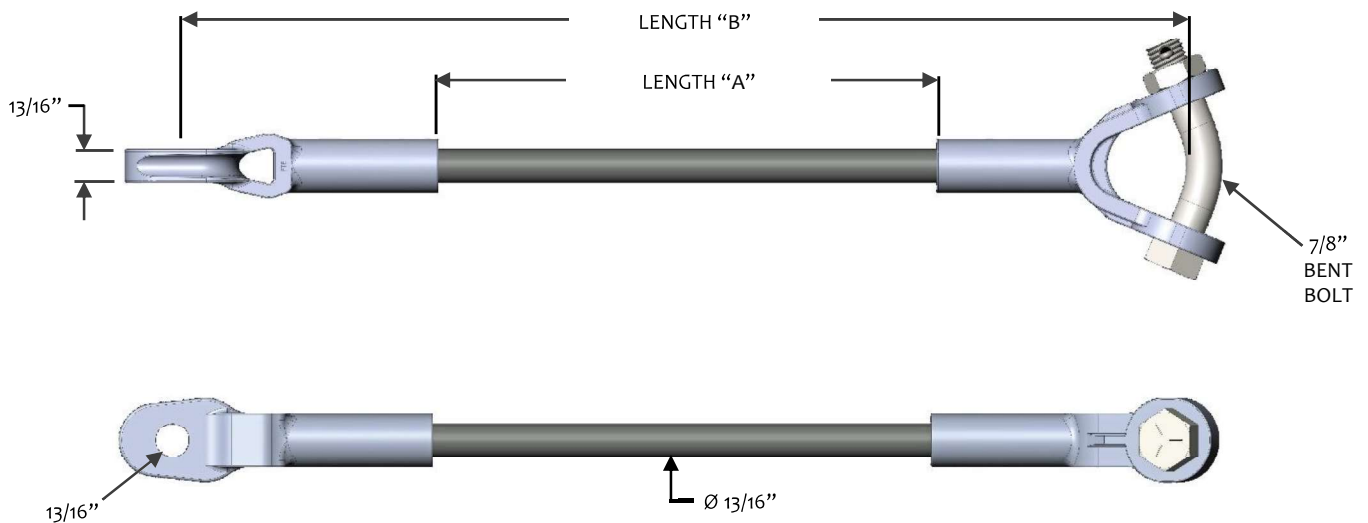

NOTE:
FOR OTHER LENGTHS PLEASE CONTACT US.