

36K GUYSTRAINS – CLEVIS / CLEVIS

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	LENGTH "A" INCHES	LENGTH "B" INCHES
FCC36-12	12	24
FCC36-18	18	30
FCC36-24	24	36
FCC36-30	30	42
FCC36-36	36	48
FCC36-42	42	54
FCC36-54	54	66
FCC36-60	60	72
FCC36-78	78	90
FCC36-96	96	108
FCC36-120	120	132
FCC36-144	144	156

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

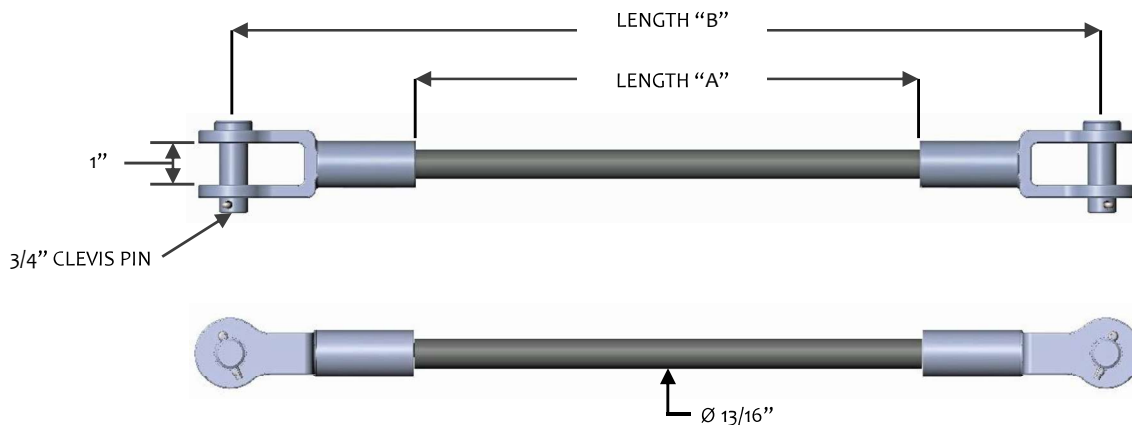

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

ADD SUFFIX "R" FOR (1) ROLLER (Example: FCC36-18R).

ADD SUFFIX "R2" FOR (2) ROLLERS (Example: FCC36-24R2).

36K GUYSTRAINS – CLEVIS / THIMBLE-EYE

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	LENGTH "A" INCHES	LENGTH "B" INCHES
FCTE36-12	12	24-1/4
FCTE36-18	18	30-1/4
FCTE36-24	24	36-1/4
FCTE36-30	30	42-1/4
FCTE36-36	36	48-1/4
FCTE36-42	42	54-1/4
FCTE36-54	54	66-1/4
FCTE36-60	60	72-1/4
FCTE36-78	78	90-1/4
FCTE36-96	96	108-1/4
FCTE36-120	120	132-1/4
FCTE36-144	144	156-1/4

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

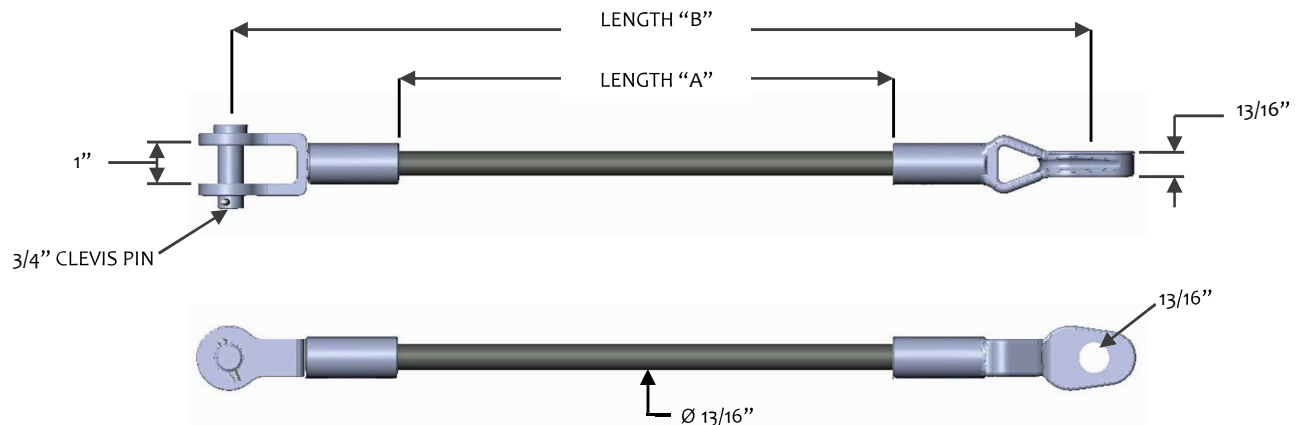

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

ADD SUFFIX "R" FOR (1) ROLLER (Example: FCTE36-18R).

36K GUYSTRAINS – THIMBLE-EYE / THIMBLE-EYE


SPECIFICATIONS

FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

CATALOG NUMBER	LENGTH "A" INCHES	LENGTH "B" INCHES
FTETE36-12	12	24-1/2
FTETE36-18	18	30-1/2
FTETE36-24	24	36-1/2
FTETE36-30	30	42-1/2
FTETE36-36	36	48-1/2
FTETE36-42	42	54-1/2
FTETE36-54	54	66-1/2
FTETE36-60	60	72-1/2
FTETE36-78	78	90-1/2
FTETE36-96	96	108-1/2
FTETE36-120	120	132-1/2
FTETE36-144	144	156-1/2

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

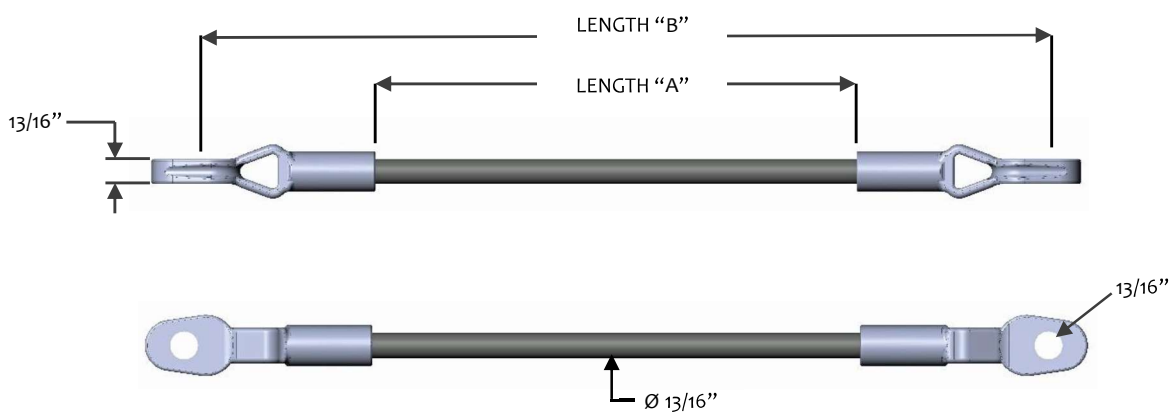

NOTE:
FOR OTHER LENGTHS PLEASE CONTACT US.

36K GUYSTRAINS – Y-CLEVIS / CLEVIS

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	LENGTH "A" INCHES	LENGTH "B" INCHES
FYCC36-12	12	24
FYCC36-18	18	30
FYCC36-24	24	36
FYCC36-30	30	42
FYCC36-36	36	48
FYCC36-42	42	54
FYCC36-54	54	66
FYCC36-60	60	72
FYCC36-78	78	90
FYCC36-96	96	108
FYCC36-120	120	132
FYCC36-144	144	156

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

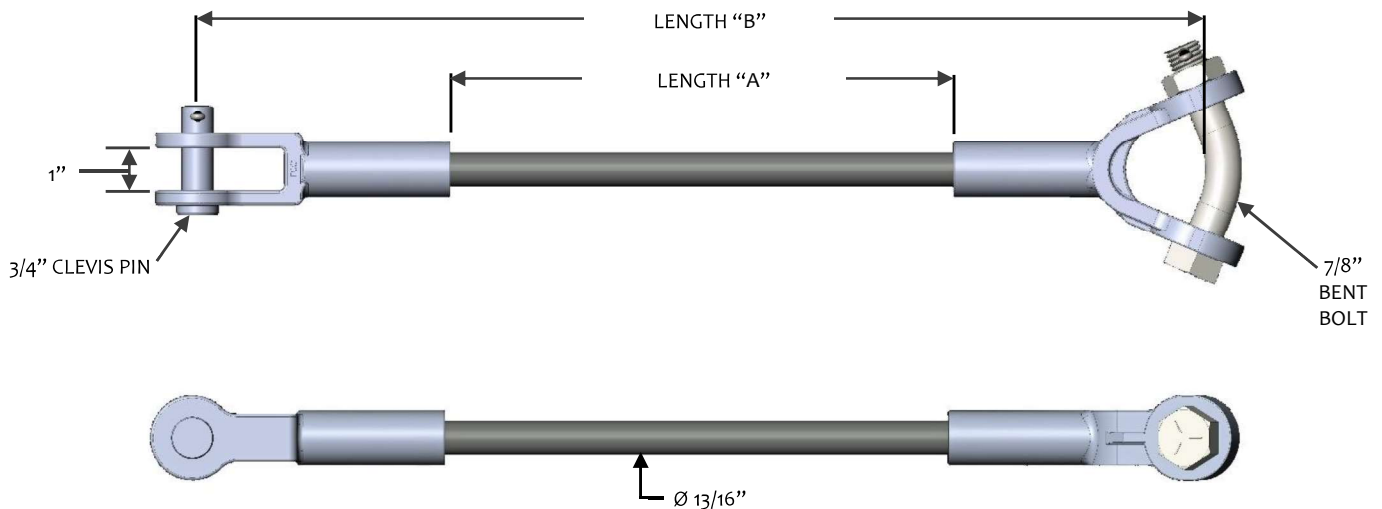

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

36K GUYSTRAINS –Y-CLEVIS / THIMBLE-EYE

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	LENGTH "A" INCHES	LENGTH "B" INCHES
FYCTE36-12	12	24.25
FYCTE36-18	18	30.25
FYCTE36-24	24	36.25
FYCTE36-30	30	42.25
FYCTE36-36	36	48.25
FYCTE36-42	42	54.25
FYCTE36-54	54	66.25
FYCTE36-60	60	72.25
FYCTE36-78	78	90.25
FYCTE36-96	96	108.25
FYCTE36-120	120	132.25
FYCTE36-144	144	156.25

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

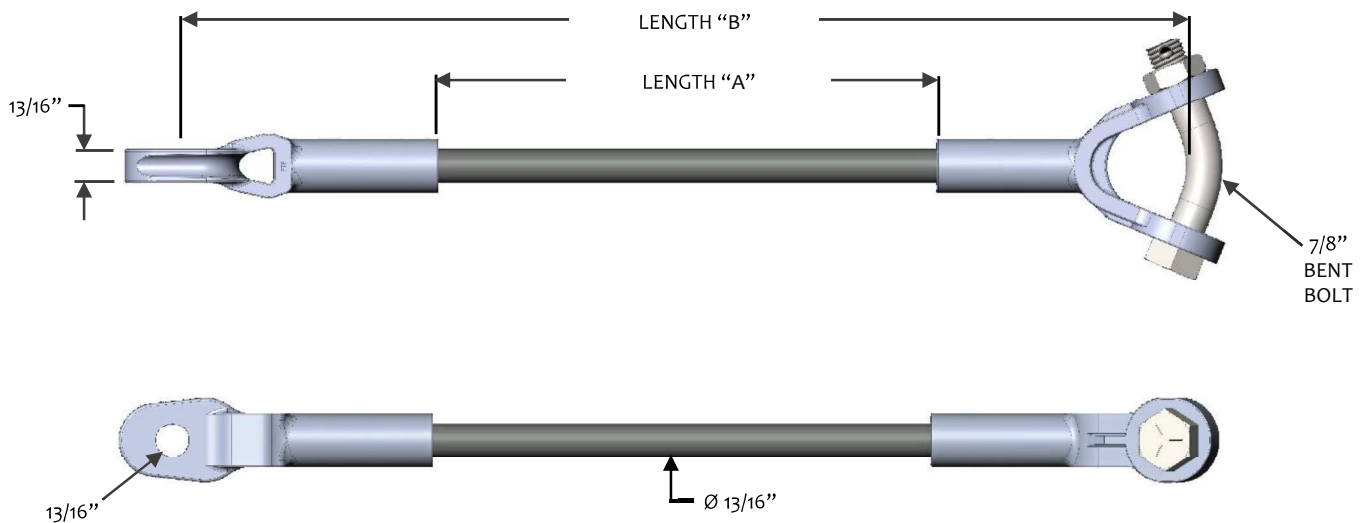

NOTE:
FOR OTHER LENGTHS PLEASE CONTACT US.