




JUMPER BRACKETS

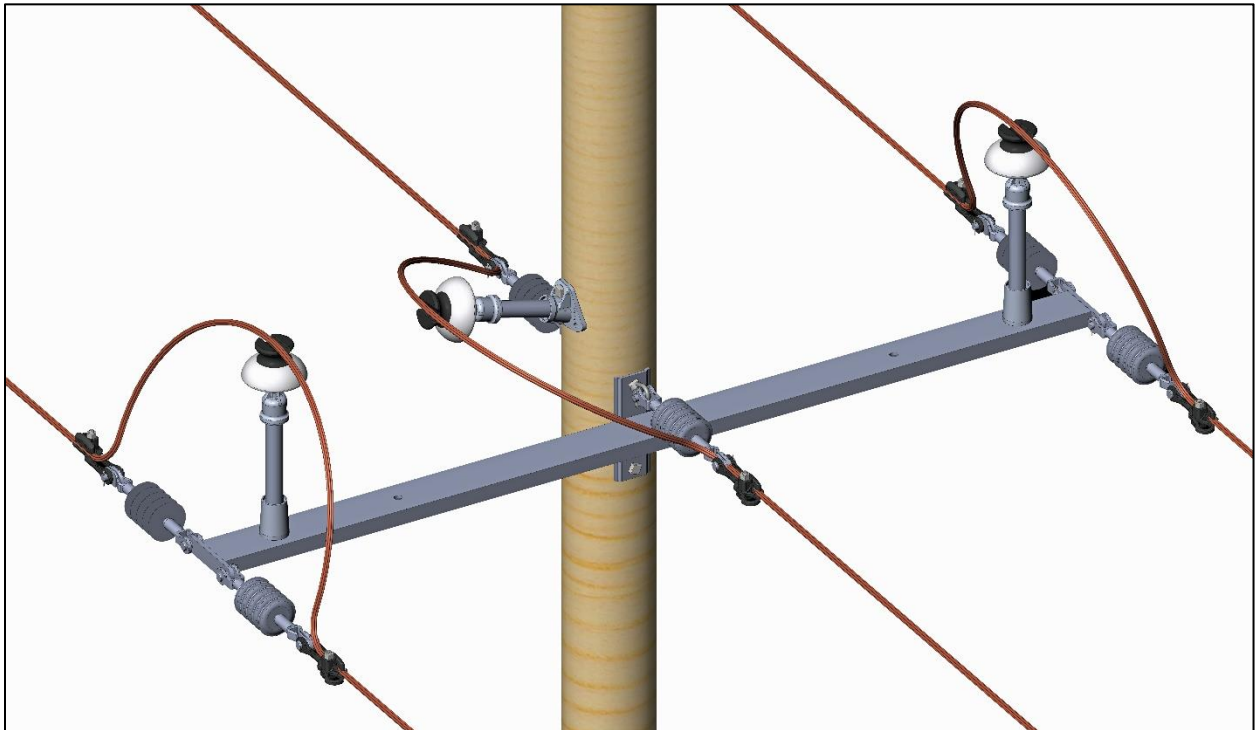

BUILD-A-BRACKET JUMPER BRACKET

BUILD-A-BRACKET SYSTEM
NUMBERING KEY

FLH JP – 1 – 18 – S1 - B2

FLH PREFIX

TYPE

OFFERINGS

JP = JUMPER PIN

ROD

DIAMETER

OFFERINGS

1 = 1-1/2" DIA

LENGTH

OFFERINGS

12 = 12"

15 = 15"

18 = 18"

24 = 24"

**MOUNTING
THREAD
LENGTH**

OFFERINGS

B2 = 2"

B5 = 5"

B8 = 8"

..

THREADS

OFFERINGS

1 = 1" NYLON

3 = 1-3/8" NYLON

FITTING OPTION


OFFERINGS

S = STRAIGHT MOUNT POSITION



JP

**JUMPER PIN
BASE**



S

**STRAIGHT
PIN**

VERTICAL JUMPER BRACKETS

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: DUCTILE IRON, 654512

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHJP-1-12-S1-B2	12	2500	900	1200
FLHJP-1-15-S1-B2	15	2500	800	1100
FLHJP-1-18-S1-B2	18	2500	700	1000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

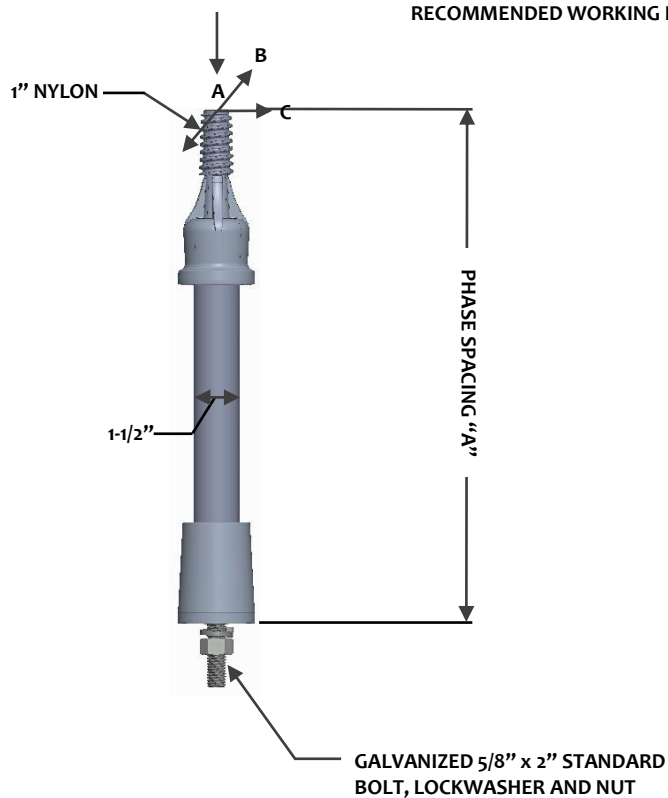

NOTE:

FOR OTHER LENGTHS OR LONGER HARDWARE PLEASE CONTACT US

BUILD-A-BRACKET JUMPER BRACKETS

BUILD-A-BRACKET SYSTEM
NUMBERING KEY

FLH JB – 1 – 18 – S1

FLH PREFIX

TYPE

OFFERINGS
JB = JUMPER BRACKET

ROD

DIAMETER

OFFERINGS
1 = 1-1/2" DIA

THREADS


OFFERINGS
1 = 1" NYLON
3 = 1-3/8" NYLON

FITTING OPTION

OFFERINGS
S = STRAIGHT MOUNT POSITION


LENGTH

OFFERINGS
12 = 12"
15 = 15"
18 = 18"
24 = 24"



JB

1-1/2" DIAMETER
15° JUMPER BASE

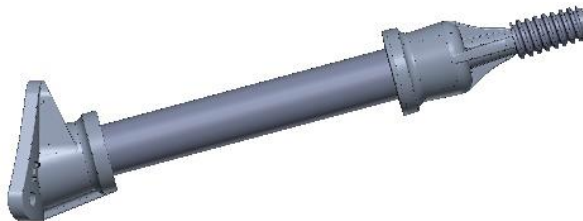

S

STRAIGHT
PIN


15° JUMPER BRACKETS

SPECIFICATIONS

BASE: ALUMINUM, 356-T6
ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.
FITTING: DUCTILE IRON, 654512
HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHJB-1-12-S1	12	1000	800	1500
FLHJB-1-15-S1	15	850	650	1500
FLHJB-1-18-S1	18	700	500	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

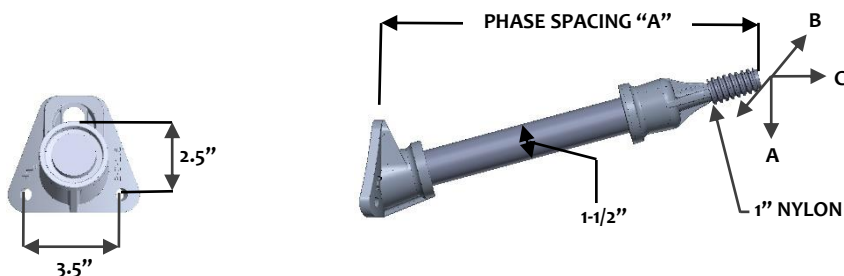

NOTE:
 BASE EXCEPTS 5/8" MOUNTING HARDWARE AND 3/8" LAG BOLTS.