




SIDEWALK GUY
BRACKETS

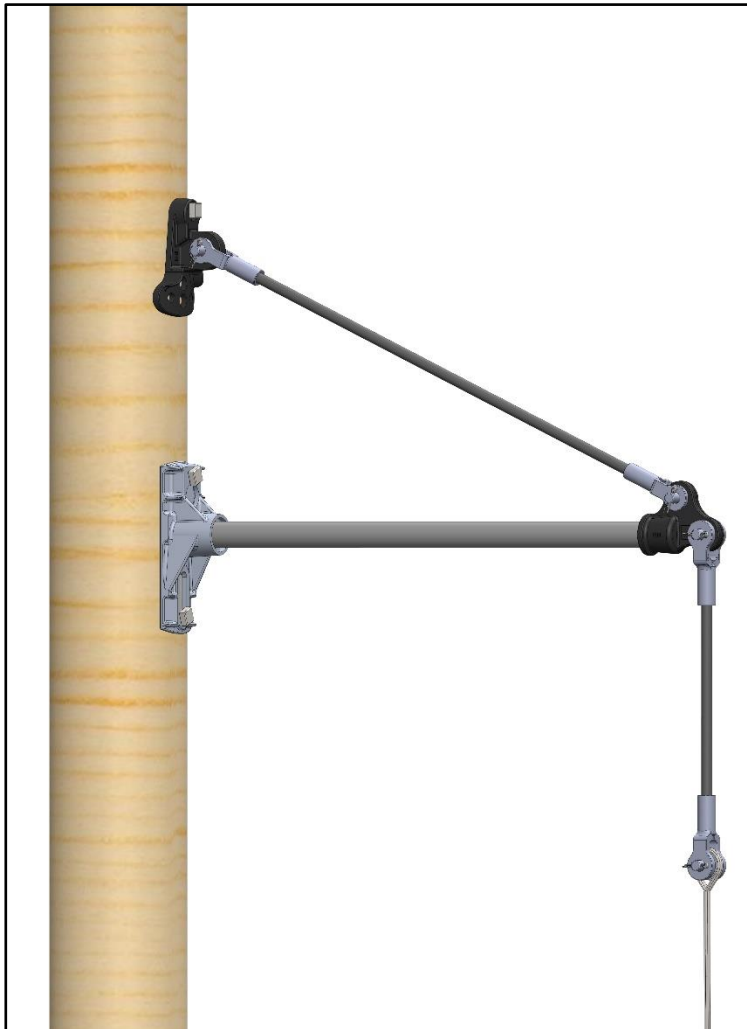

SIDEWALK GUY BRACKET

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTINGS: DUCTILE IRON, 654512

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	SPACING (IN)				ANGLE θ	MINIMUM ULTIMATE LOADS (LBS)		
	L	S	E	D		VERT (A)	LONG (B)	TRANS (C)
FSWG-24E	24	10.31	23.5	15.5	25°	10,000	675	10,000
FSWG-36E	36	15.63	36.5	28.5	25°	10,000	450	10,000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

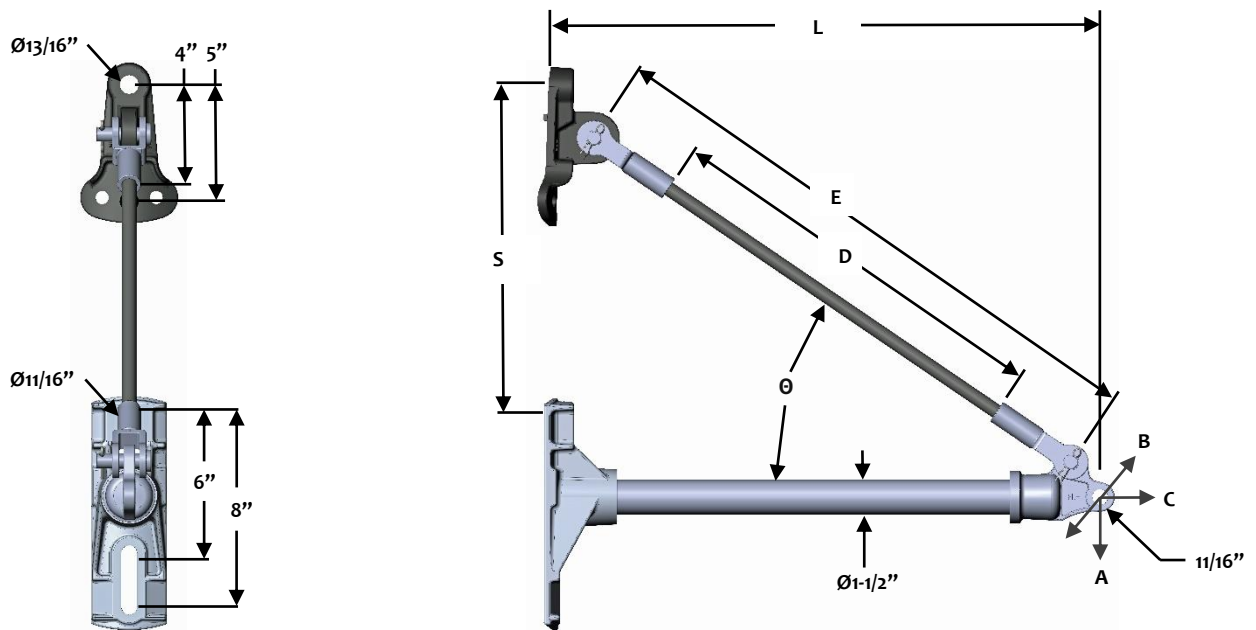

NOTE:
FOR OTHER LENGTHS PLEASE CONTACT US.