




SUSPENSION
BRACKETS

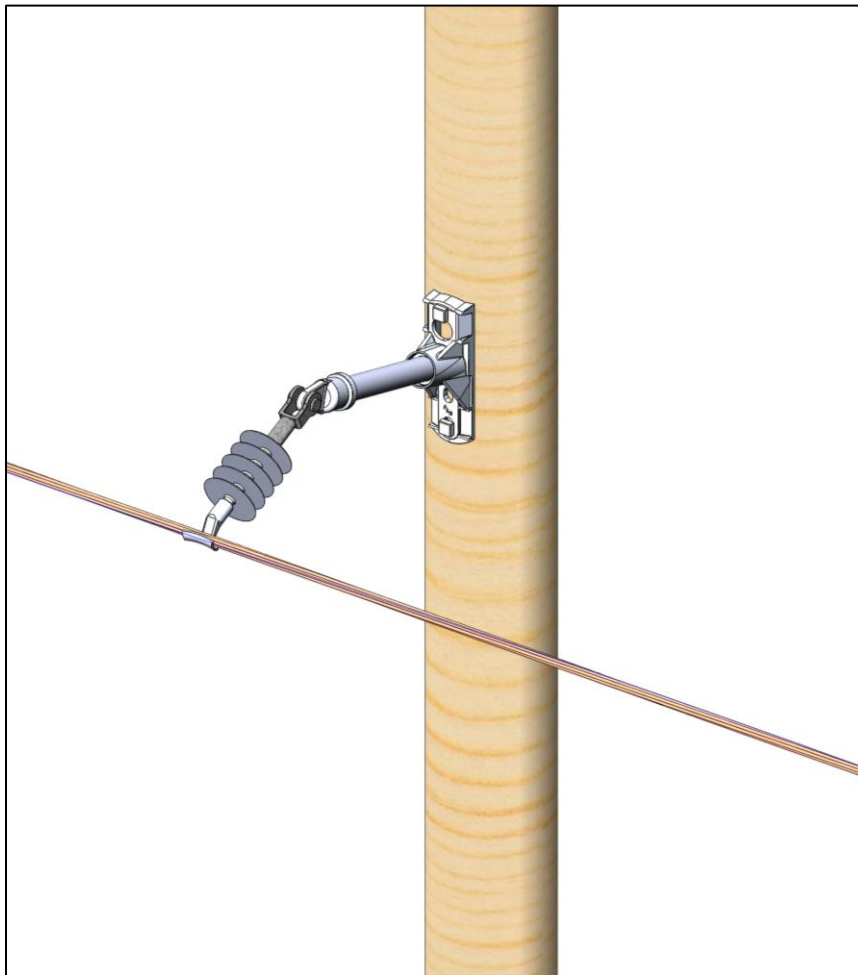

BUILD-A-BRACKET SINGLE PHASE SUSPENSION BRACKETS

BUILD-A-BRACKET SYSTEM
NUMBERING KEY

FLH R – 1 –18 - E

FLH PREFIX

RISE

OFFERINGS

R = FIFTEEN DEGREE

ROD DIAMETER

OFFERINGS

1 = 1-1/2" DIA

FITTING OPTION

OFFERINGS

E = SUSPENSION EYE

LENGTH

OFFERINGS

12 = 12"

15 = 15"

18 = 18"

21 = 21"

24 = 24"

FLH 2 – 1 –36 - E S 1

FLH PREFIX

DOUBLE PHASE

ROD DIAMETER

OFFERINGS

1 = 1-1/2" DIA

LENGTH

OFFERINGS

36 = 36"

42 = 42"

48 = 48"

60 = 60"

THREADS

OFFERINGS

1 = 1" NYLON

3 = 1-3/8" NYLON

FITTING OPTION


OFFERINGS

E = SUSPENSION EYE

S = STRAIGHT PIN POSITION


BUILD-A-BRACKET SINGLE PHASE SUSPENSION BRACKETS

OPTIONS




S

STRAIGHT
PIN




FLH-R

KEYHOLE MOUNTING
1-1/2" DIAMETER
15° BASE



E

SUSPENSION
EYE

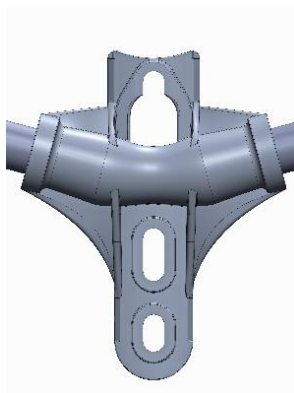

FLH-2

15° DOUBLE PHASE BASE


SINGLE PHASE 15° SUSPENSION BRACKET

SPECIFICATIONS

BASE: ALUMINUM, 356-T6
 ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.
 FITTING: ALUMINUM, 356-T6
 HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE POUNDS		
		VERTICAL A	LONGAL B	TRANSY. C
FLHR-1-15E	15	1500	1150	5000
FLHR-1-18E	18	1200	900	5000
FLHR-1-21E	21	1025	775	5000
FLHR-1-24E	24	900	700	5000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

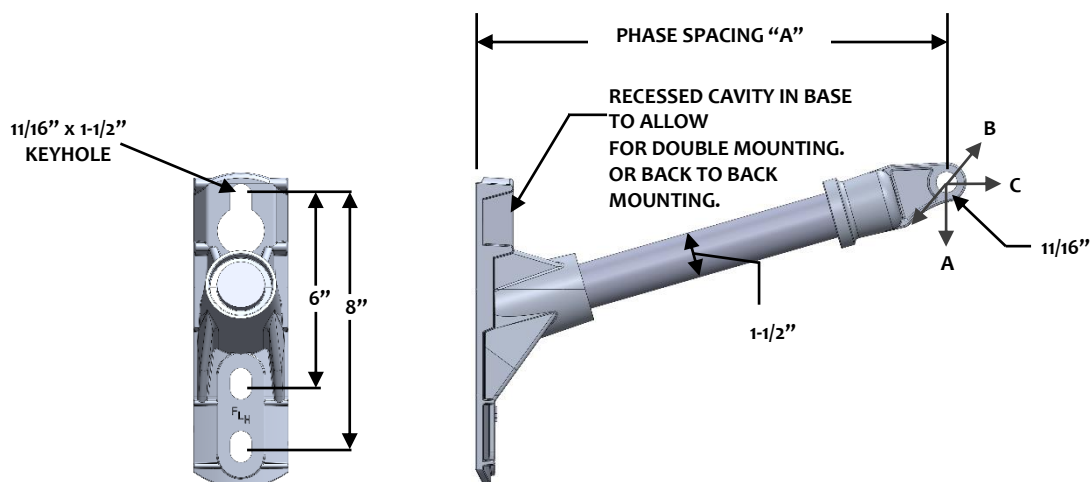

NOTE:
 FOR OTHER LENGTHS PLEASE CONTACT US.
 TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLHR-1-18E-SC)

DOUBLE PHASE 15° STRAIGHT PIN / SUSPENSION BRACKET
SPECIFICATIONS
BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE POUNDS		
		VERTICAL A	LONGAL B	TRANSY. C PIN / EYE
FLH2-1-36ES1	36	1600	1325	1500 / 5000
FLH2-1-42ES1	42	1375	1150	1500 / 5000
FLH2-1-48ES1	48	1200	1000	1500 / 5000

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

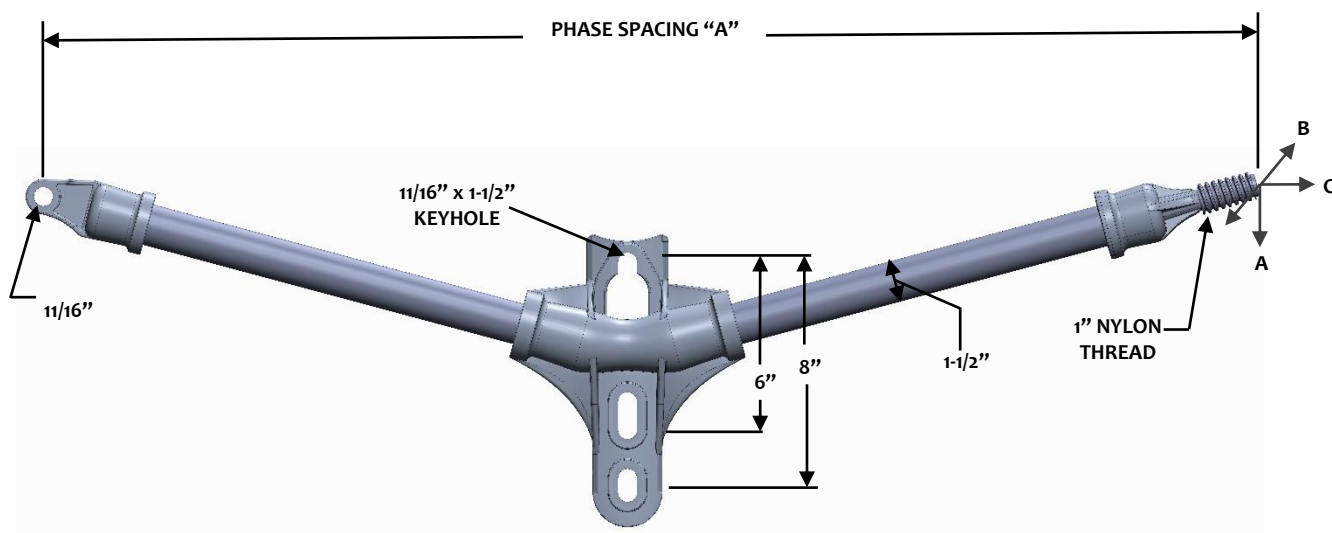
NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH2-1-36ES1-SC)