


1-1/2" Round Corner Square Piles

(1.5" Solid shaft)

Torque: 7,000 FT-LB

Ult. Mechanical Rating: Tension: 70 Kip

Helix Thickness: 3/8" (.375)

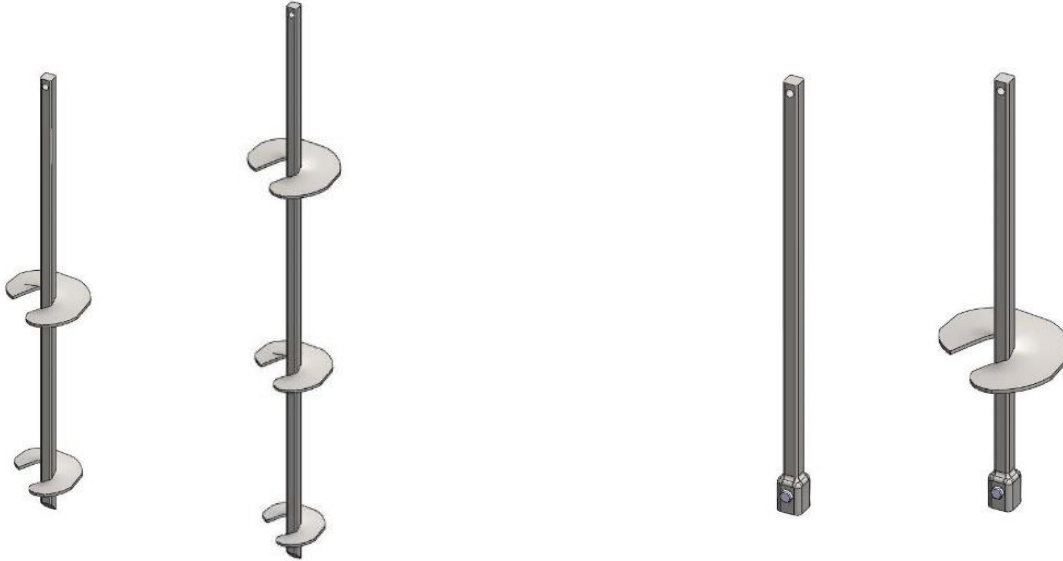

Catalog Number	Length (in)	Helix Ø
S736U810	36	8-10
S742U1012	42	10-12
S766U81012	66	8-10-12
S784U101214	84	10-12-14
S7126U8101214	126	8-10-12-14
S7126U10121414	126	10-12-14-14
To include double eye guy attachment, add suffix "D"		
To include triple eye guy attachment, add suffix "T"		
Finish: Hot Dip Galvanized per ASTM A153		

Catalog Number	Length (in)	Helix Ø
S7E42	42	-
S7E60	60	-
S7E84	84	-
S7E120	120	-
S7E42U12	42	12
S7E60U14	60	14
Hardware: Stud per ASTM A193-B7 (1 ea)		
Hex jam nuts per ASTM A563 (2 ea)		
Finish: Hot Dip Galvanized per ASTM A153		

Catalog Number	Description	Ultimate Tensile Rating (lb)	Pulling Eye Rating (lb)
S7604E	Twin Eye	70,000	12,000
S7606E	Triple Eye		
Hardware: Hex Bolt per SAE J429 Gr. 5 (1 ea) Hex jam nuts per ASTM A563 (1 ea)			
Finish: Hot Dip Galvanized per ASTM A153			

